

Льдогенераторы конусного льда (гурме) АС

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: hib@nt-rt.ru || сайт: <https://hibu.nt-rt.ru/>

AC 47 EcoX


Self Contained Ice Machine 25 kg

		FEATURES • Produces individual Gourmet crystal clear ice cubes. • Resistant stainless steel exterior. • Advanced diagnostics computerized controls. • Front panel in and out airflow (air-cooled model only) for built-in installation. • Front access condenser air filter, removable and washable (air cooled model only). • Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system. • Water system protected by patented anti-scale system. • Legs are not included and must be ordered separately as an accessory.	
 AC M 47 Medium Gourmet 20 g Ø 30 x H 34 mm	CONDENSING SYSTEM Air cooled Water cooled	INTERNAL BIN CAPACITY 9 kg	
	REFRIGERANT GAS R290		
	VOLTAGE V/Hz/ph 230/50/1		
		OPERATING REQUIREMENTS	
			MinimumMaximum
		Air temperature	1043
		Water temperature	538
		Water pressure	1 bar (14 psi)5 bar (70 psi)
		Electrical voltage	-10%+10%

Self Contained Ice Machine 25 kg

AC 47 EcoX

Self Contained Ice Machine 25 kg

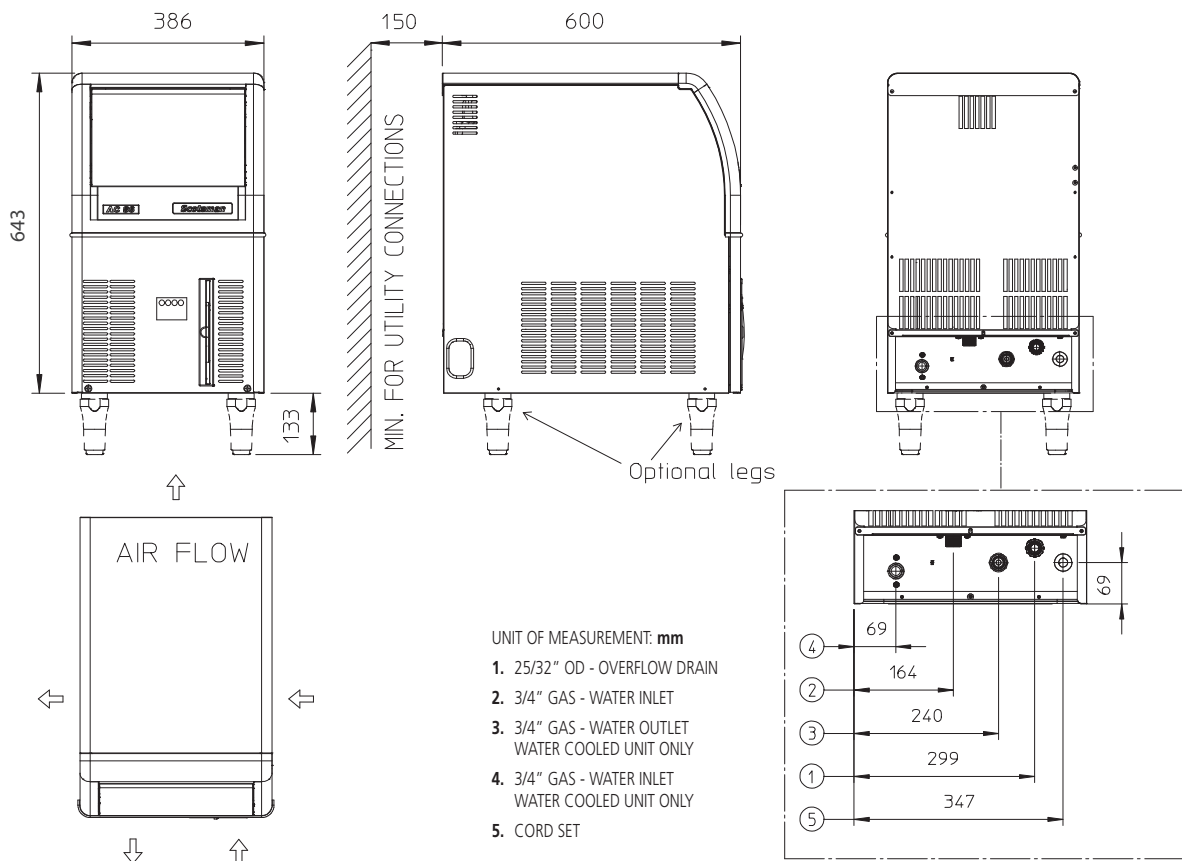

UNIT DATA					SHIPPING DATA							
Size (W x D x H)		386 x 600 x 645 mm			Carton (W x D x H)		460 x 670 x 760 mm					
Net weight		35 kg			Weight		42 kg					
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size	
Version	Voltage	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A	
ACM 47 AS	230/50/1	25	24	18	32.2	5.8	4.0	320	616	3 x 1.0	10	
ACM 47 WS	230/50/1	27	25	21	22.9	4.8	21.4	280	616	3 x 1.0	10	

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

AC 57 EcoX


Self Contained Ice Machine 33 kg

		FEATURES • Produces individual Gourmet crystal clear ice cubes. • Resistant stainless steel exterior. • Advanced diagnostics computerized controls. • Front panel in and out airflow (air-cooled model only) for built-in installation. • Front access condenser air filter, removable and washable (air cooled model only). • Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system. • Water system protected by patented anti-scale system. • Legs are not included and must be ordered separately as an accessory.	
 AC M 57 Medium Gourmet 20 g Ø 30 x H 34 mm  AC S 57 Small Gourmet 8 g Ø 21 x H 25 mm	CONDENSING SYSTEM Air cooled Water cooled	INTERNAL BIN CAPACITY 12 kg	
	REFRIGERANT GAS R290		
	VOLTAGE V/Hz/ph 230/50/1		
		OPERATING REQUIREMENTS	
			MinimumMaximum
		Air temperature	1043
		Water temperature	538
		Water pressure	1 bar (14 psi)5 bar (70 psi)
		Electrical voltage	-10%+10%

Self Contained Ice Machine 33 kg

AC 57 EcoX

Self Contained Ice Machine 33 kg

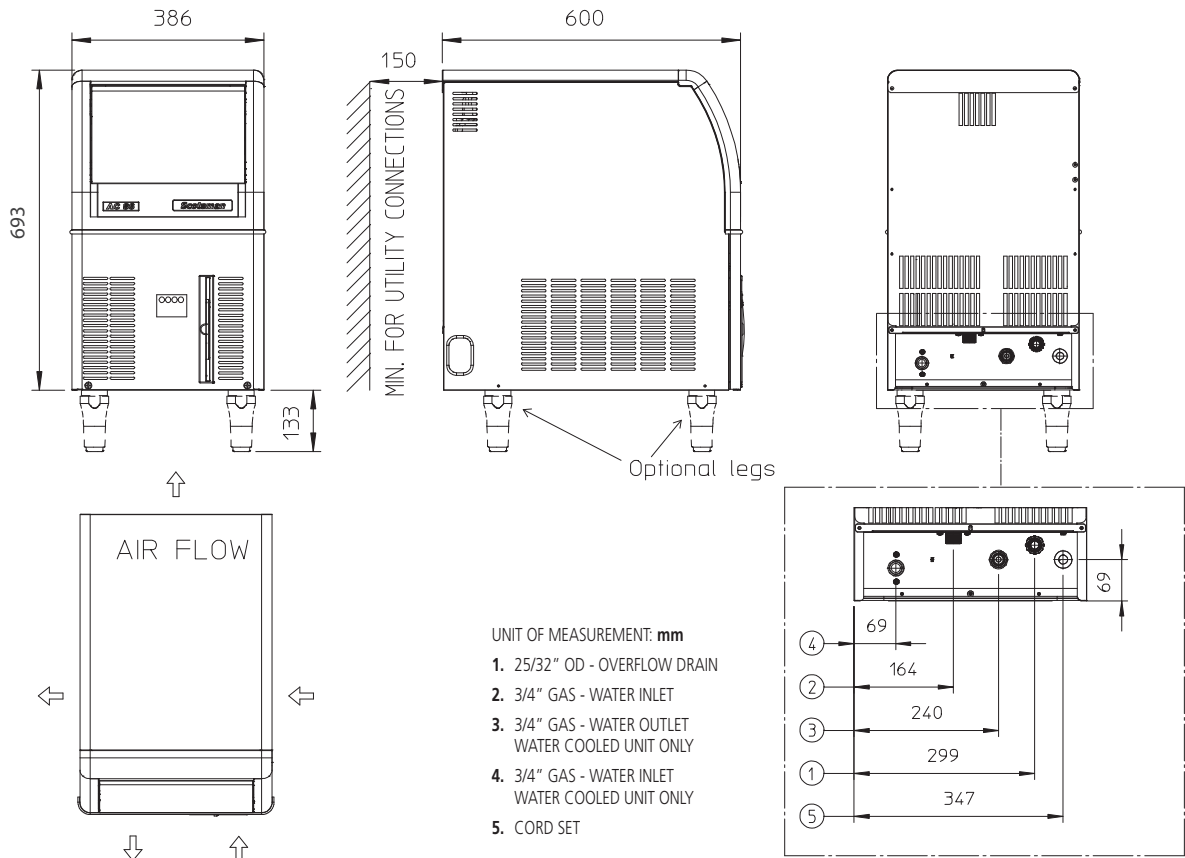

UNIT DATA					SHIPPING DATA							
Size (W x D x H)		386 x 600 x 695 mm			Carton (W x D x H)		460 x 670 x 810 mm					
Net weight		36 kg			Weight		43 kg					
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size	
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A	
		kg	kg	kg								
ACM 57 AS	230/50/1	33	31	25	27.0	6.6	4.0	370	730	1 x 1.5	10	
ACM 57 WS	230/50/1	34	33	29	19.7	5.7	23.4	300	730	1 x 1.0	10	
ACS 57 AS	230/50/1	28	27	22	30.9	6.8	4.0	370	730	1 x 1.0	10	

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

AC 87 EcoX





Self Contained Ice Machine 44 kg

		FEATURES • Produces individual Gourmet crystal clear ice cubes. • Resistant stainless steel exterior. • Advanced diagnostics computerized controls. • Front panel in and out airflow (air-cooled model only) for built-in installation. • Front access condenser air filter, removable and washable (air cooled model only). • Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system. • Water system protected by patented anti-scale system.		
 AC M 87 Medium Gourmet 20 g Ø 30 x H 34 mm  AC S 87 Small Gourmet 8 g Ø 21 x H 25 mm	CONDENSING SYSTEM Air cooled	INTERNAL BIN CAPACITY 19 kg		
	REFRIGERANT GAS R290			
	VOLTAGE V/Hz/ph 230/50/1			
		OPERATING REQUIREMENTS		
			Minimum	Maximum
		Air temperature	10	43
		Water temperature	5	38
		Water pressure	1 bar (14 psi)	5 bar (70 psi)
		Electrical voltage	-10%	+10%

Self Contained Ice Machine 44 kg


AC 87 EcoX

Self Contained Ice Machine 44 kg

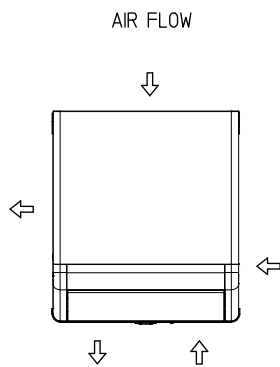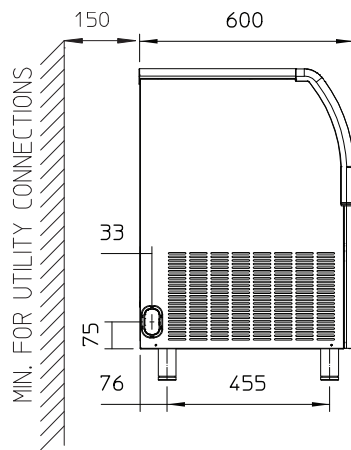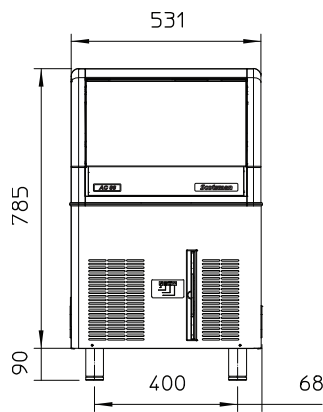

UNIT OF MEASUREMENT: mm

1. 25/32" OD - OVERFLOW DRAIN
2. 3/4" GAS - WATER INLET
3. 3/4" GAS - WATER OUTLET
WATER COOLED UNIT ONLY
4. 3/4" GAS - WATER INLET
WATER COOLED UNIT ONLY
5. CORD SET

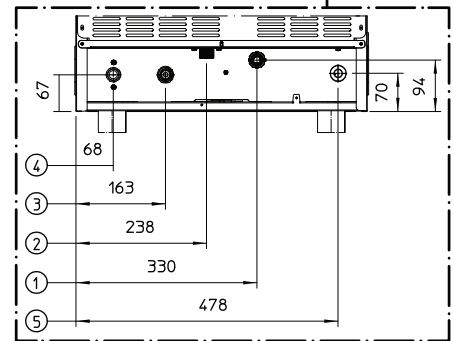

UNIT DATA					SHIPPING DATA						
Size (W x D x H)		531 x 600 x 875 mm			Carton (W x D x H)		600 x 670 x 890 mm				
Net weight		44 kg			Weight		51 kg				
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
ACM 87 AS	230/50/1	44	44	35	30.7	10.8	3.4	570	1215	3 x 1.5	10
ACS 87 AS	230/50/1	40	39	31	35.8	11.1	5.0	580	1215	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

AC 107


Self Contained Ice Machine 53 kg

		FEATURES • Produces individual Gourmet crystal clear ice cubes. • Resistant stainless steel exterior. • Advanced diagnostics computerized controls. • Front panel in and out airflow (air-cooled model only) for built-in installation. • Routine maintenance visible alarm light on front panel. • Ergonomically designed ice-storage access, with disappearing door. Door-closing movement dampening system. • Water system protected by patented anti-scale system.	
 AC M 107 Medium Gourmet 20 g Ø 30 x H 34 mm	CONDENSING SYSTEM Air cooled	INTERNAL BIN CAPACITY 23 kg	
	REFRIGERANT GAS R290		
	VOLTAGE V/Hz/ph 230/50/1		
		OPERATING REQUIREMENTS	
			MinimumMaximum
		Air temperature	1043
		Water temperature	538
		Water pressure	1 bar (14 psi)5 bar (70 psi)
		Electrical voltage	-10%+10%

Self Contained Ice Machine 53 kg

AC 107

Self Contained Ice Machine 53 kg

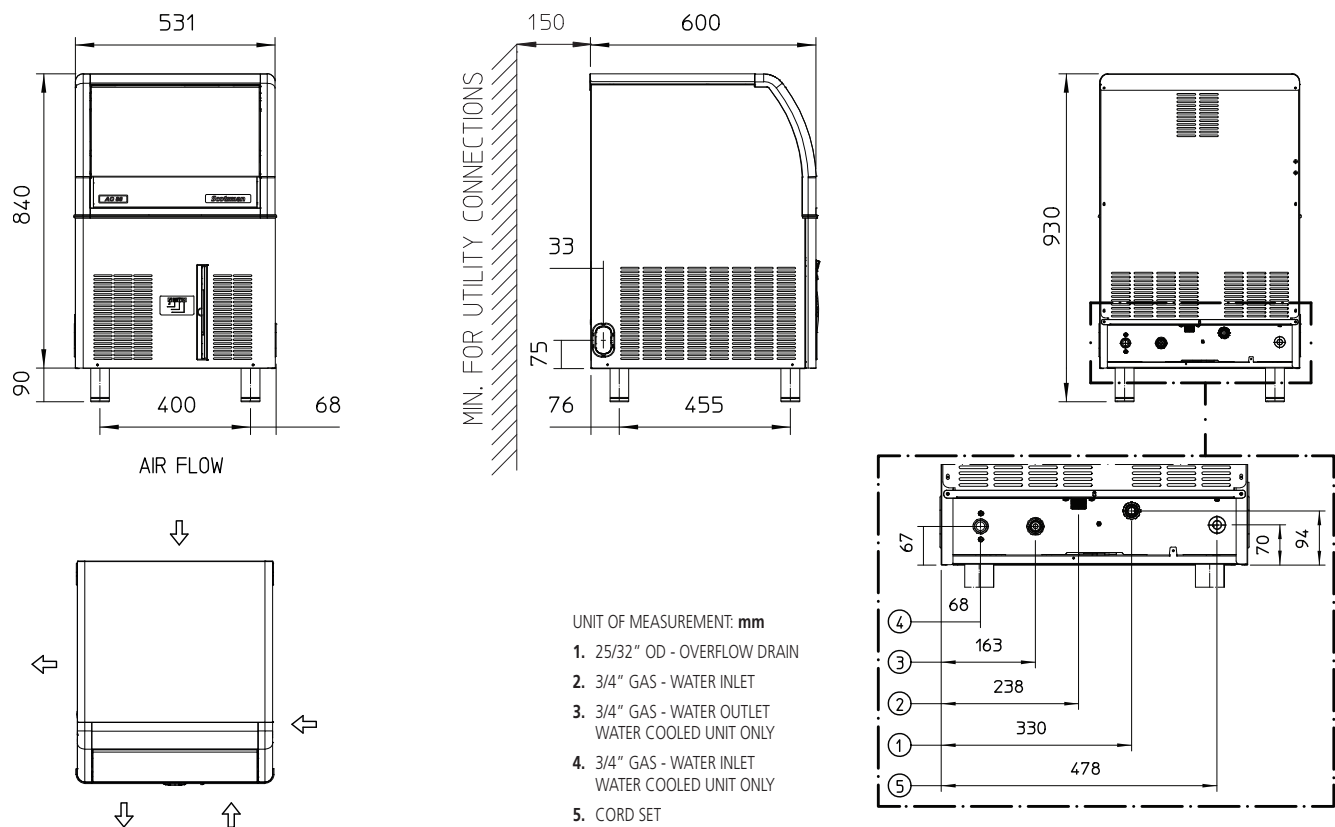

UNIT DATA					SHIPPING DATA						
Size (W x D x H)		531 x 600 x 930 mm			Carton (W x D x H)		600 x 670 x 950 mm				
Net weight		47 kg			Weight		54 kg				
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
ACM 107 AS	230/50/1	53	51	43	24.9	10.7	5.2	580	1215	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

AC 127 EcoX


Self Contained Ice Machine 75 kg

		FEATURES • Produces individual Gourmet crystal clear ice cubes. • Resistant stainless steel exterior. • Advanced diagnostics computerized controls. • Front panel in and out airflow (air-cooled model only) for built-in installation. • Front access condenser air filter, removable and washable (air cooled version only). • Routine maintenance visible alarm light on front panel. Water system protected by patented anti-scale system. • Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.		
 AC M 127 Medium Gourmet 20 g Ø 30 x H 34 mm	CONDENSING SYSTEM Air cooled	INTERNAL BIN CAPACITY 39 kg		
	REFRIGERANT GAS R290			
	VOLTAGE V/Hz/ph 230/50/1			
		OPERATING REQUIREMENTS		
			Minimum	Maximum
		Air temperature	10	43
		Water temperature	5	38
		Water pressure	1 bar (14 psi)	5 bar (70 psi)
		Electrical voltage	-10%	+10%

Self Contained Ice Machine 75 kg

AC 127

Self Contained Ice Machine 75 kg

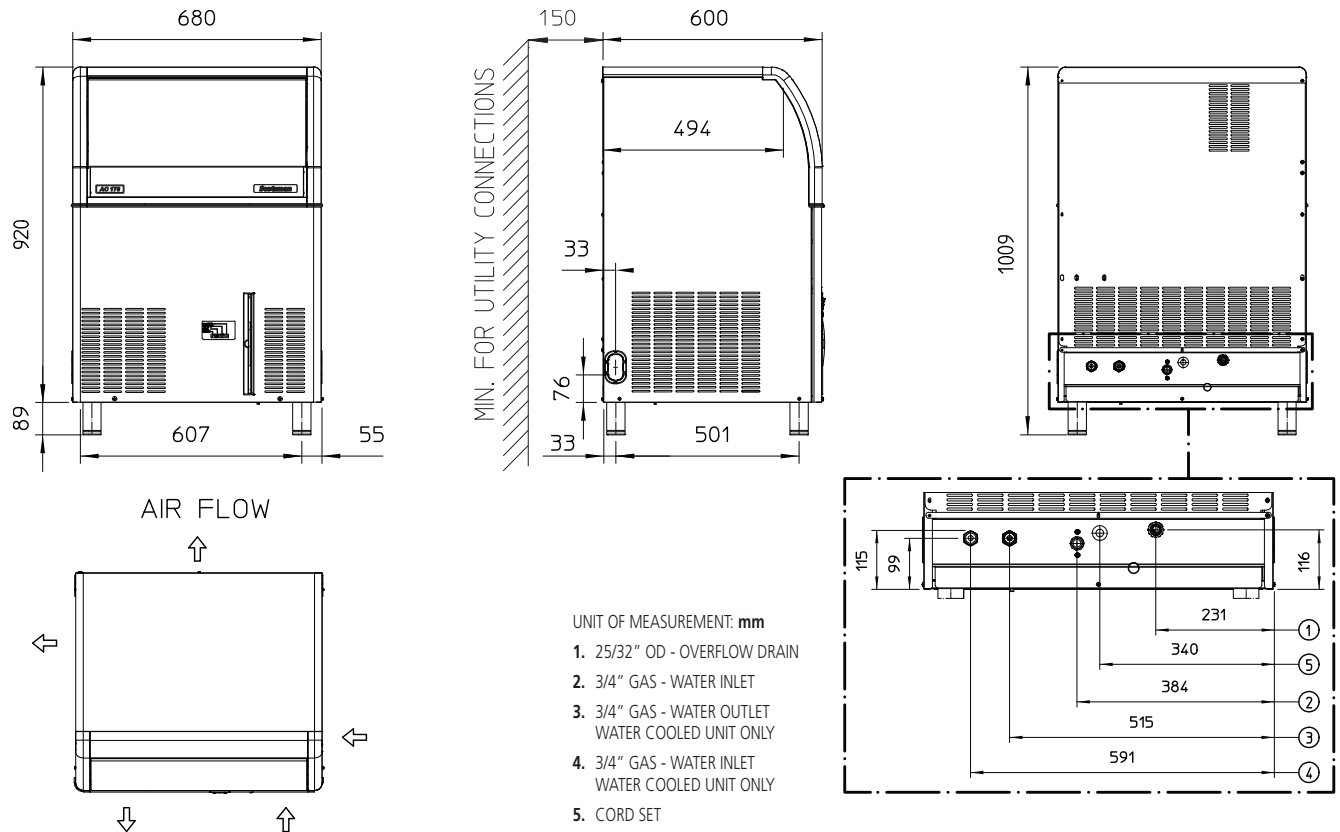

UNIT DATA				SHIPPING DATA							
Size (W x D x H)		680 x 600 x 1009 mm		Carton (W x D x H)		750 x 670 x 1100 mm					
Net weight		65 kg		Weight		75 kg					
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
ACM 127 AS	230/50/1	75	74	60	21.5	12.9	7.4	670	1400	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

AC 177


Self Contained Ice Machine 84 kg

		FEATURES • Produces individual Gourmet crystal clear ice cubes. • Resistant stainless steel exterior. • Advanced diagnostics computerized controls. • Front panel in and out airflow (air-cooled model only) for built-in installation. • Front access condenser air filter, removable and washable (air cooled version only). • Water system protected by patented anti-scale system. • Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.	
 AC M 177 Medium Gourmet 20 g Ø 30 x H 34 mm	CONDENSING SYSTEM Air cooled	INTERNAL BIN CAPACITY 48 kg	
	REFRIGERANT GAS R290		
	VOLTAGE V/Hz/ph 230/50/1		
	OPERATING REQUIREMENTS		
		Minimum	Maximum
Air temperature		10	43
Water temperature		5	38
Water pressure		1 bar (14 psi)	5 bar (70 psi)
Electrical voltage		-10%	+10%

Self Contained Ice Machine 84 kg

AC 177 EcoX

Self Contained Ice Machine 84 kg

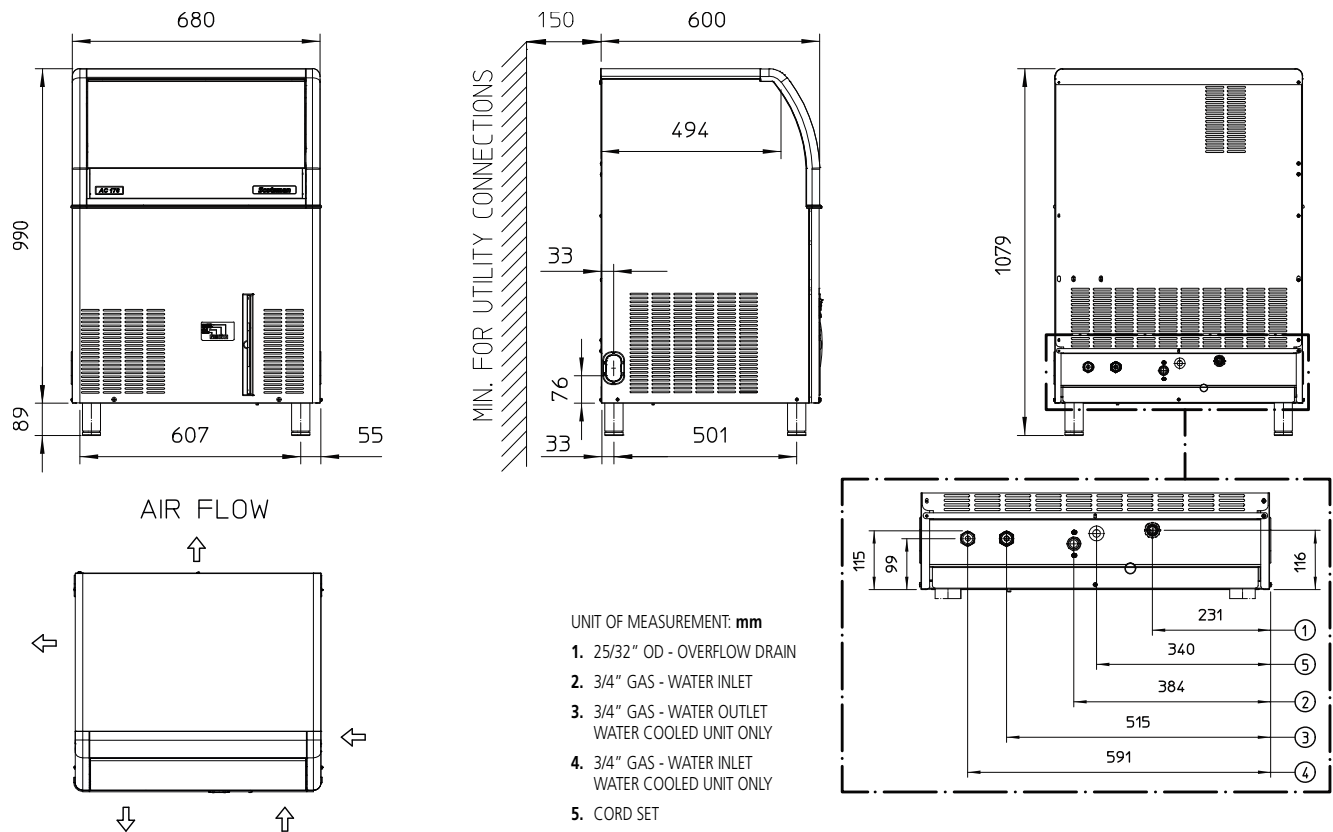

UNIT DATA				SHIPPING DATA							
Size (W x D x H)		680 x 600 x 1079 mm		Carton (W x D x H)		750 x 670 x 1170 mm					
Net weight		70 kg		Weight		80 kg					
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
ACM 177 AS	230/50/1	84	83	64	20.6	13.1	8.8	750	1680	3 x 1.5	16

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

AC 207 EcoX


Self Contained Ice Machine 145 kg

		FEATURES • Produces individual Gourmet crystal clear ice cubes. • Resistant stainless steel exterior. • Front panel in and out airflow (air-cooled model only) for built-in installation. • Front access condenser air filter, removable and washable (air cooled version only) • Easily accessible front panel mount ON-OFF Switch • Routine maintenance visible alarm light on front pane • Ergonomically designed ice-storage access, with disappearing door. Door-closing movement dampening system.	
 AC M 207 Medium Gourmet 20 g Ø 30 x H 34 mm	CONDENSING SYSTEM Air cooled	INTERNAL BIN CAPACITY 50 kg	
	REFRIGERANT GAS R290		
	VOLTAGE V/Hz/ph 230/50/1		
		OPERATING REQUIREMENTS	
			MinimumMaximum
		Air temperature	1043
		Water temperature	538
		Water pressure	1 bar (14 psi)5 bar (70 psi)
		Electrical voltage	-10%+10%

Self Contained Ice Machine 145 kg

AC 207 EcoX

Self Contained Ice Machine 145 kg

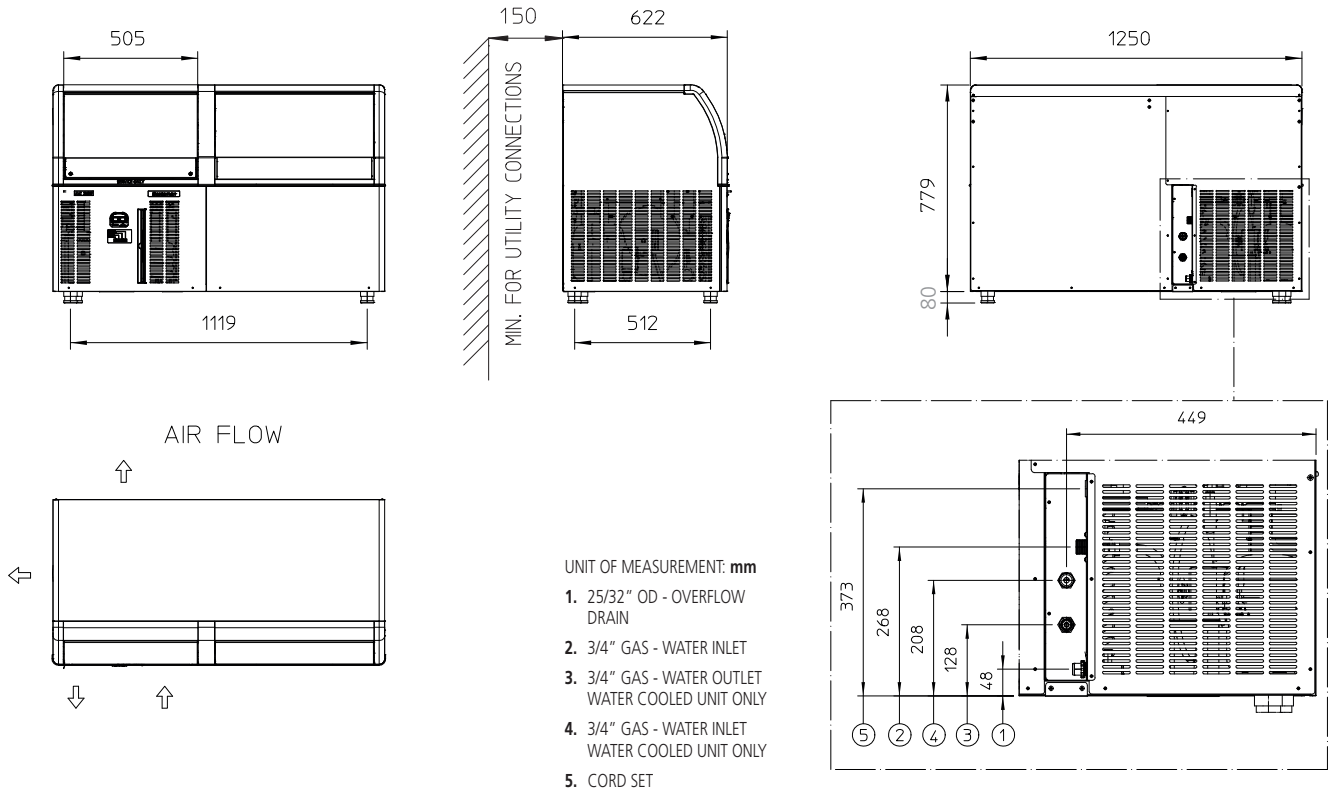

UNIT DATA				SHIPPING DATA							
Size (W x D x H)		1250 x 622 x 859 mm		Carton (W x D x H)		1320 x 690 x 960 mm					
Net weight		82 kg		Weight		95 kg					
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
ACM 207 AS	230/50/1	145	150	115	19.3	22.2	18	1170	1536	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

AC 227 EcoX


Self Contained Ice Machine 165 kg

		FEATURES • Produces individual Gourmet crystal clear ice cubes. • Resistant stainless steel exterior. • Advanced diagnostics computerized control. • Front panel in and out airflow (air-cooled model only) for built-in installation. • Front access condenser air filter, removable and washable (air cooled version only). • Easily accessible front panel mount ON-OFF Switch. • Routine maintenance visible alarm light on front panel. • Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.	
 AC M 227 Medium Gourmet 20 g Ø 30 x H 34 mm	CONDENSING SYSTEM Air cooled	INTERNAL BIN CAPACITY 70 kg	
	REFRIGERANT GAS R290		
	VOLTAGE V/Hz/ph 230/50/1		
		OPERATING REQUIREMENTS	
			MinimumMaximum
		Air temperature	1043
		Water temperature	538
		Water pressure	1 bar (14 psi)5 bar (70 psi)
		Electrical voltage	-10%+10%

Self Contained Ice Machine 165 kg

AC 227 EcoX

Self Contained Ice Machine 165 kg

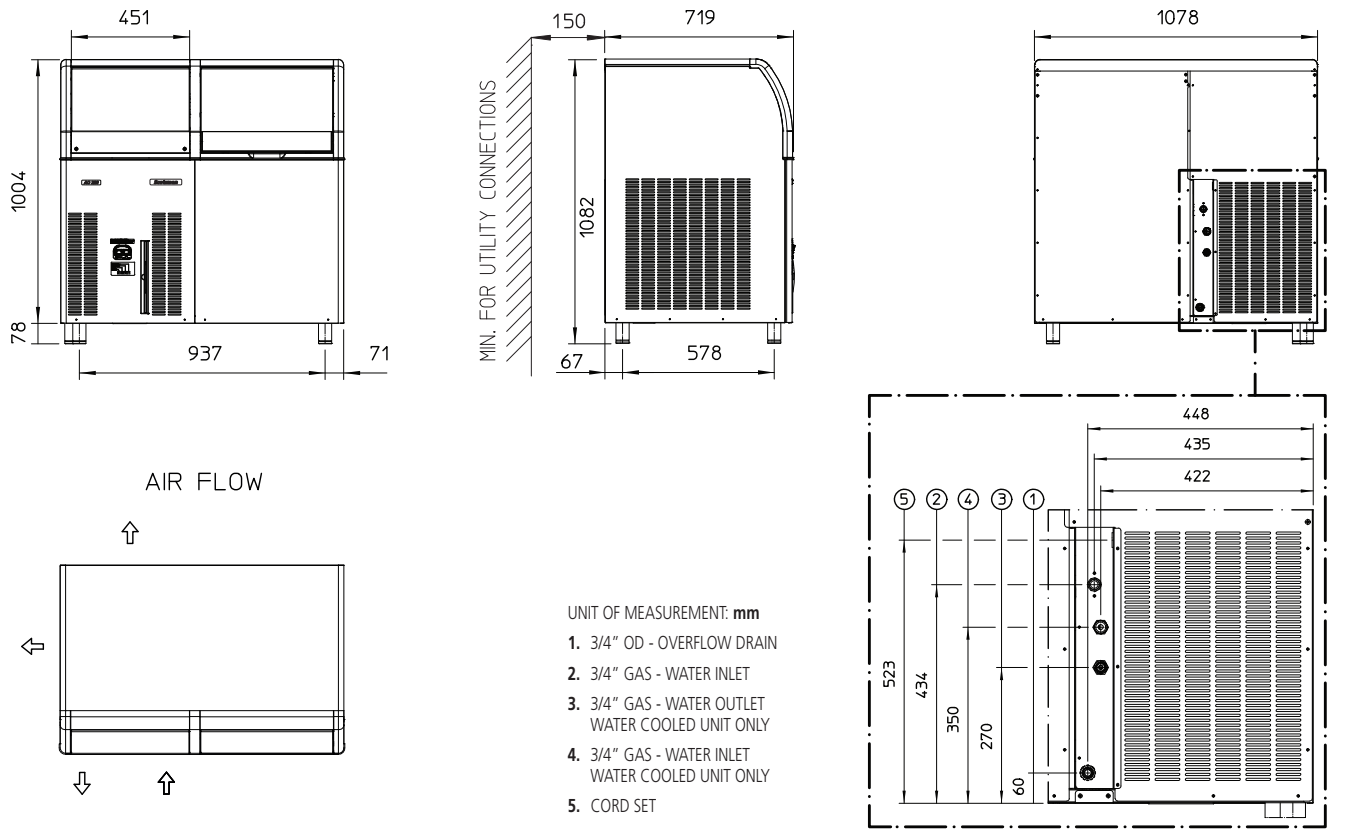

UNIT DATA				SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions			
Size (W x D x H)		1078 x 719 x 1082 mm		Carton (W x D x H)		1150 x 780 x 1160 mm					
Net weight		96 kg		Weight		110 kg					
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
ACM 227 AS	230/50/1	165	160	130	21.5	28	20.6	1400	3620	3 x 1.5	16



По вопросам продаж и поддержки обращайтесь:				
Алматы (727)345-47-04 Ангарск (3955)60-70-56 Архангельск (8182)63-90-72 Астрахань (8512)99-46-04 Барнаул (3852)73-04-60 Белгород (4722)40-23-64 Благовещенск (4162)22-76-07 Брянск (4832)59-03-52 Владивосток (423)249-28-31 Владикавказ (8672)28-90-48 Владимир (4922)49-43-18 Волгоград (844)278-03-48 Вологда (8172)26-41-59 Воронеж (473)204-51-73 Екатеринбург (343)384-55-89	Иваново (4932)77-34-06 Ижевск (3412)26-03-58 Иркутск (395)279-98-46 Казань (843)206-01-48 Калининград (4012)72-03-81 Калуга (4842)92-23-67 Кемерово (3842)65-04-62 Киров (8332)68-02-04 Коломна (4966)23-41-49 Кострома (4942)77-07-48 Краснодар (861)203-40-90 Красноярск (391)204-63-61 Курск (4712)77-13-04 Курган (3522)50-90-47 Липецк (4742)52-20-81	Магнитогорск (3519)55-03-13 Москва (495)268-04-70 Мурманск (8152)59-64-93 Набережные Челны (8552)20-53-41 Нижний Новгород (831)429-08-12 Новокузнецк (3843)20-46-81 Ноябрьск (3496)41-32-12 Новосибирск (383)227-86-73 Омск (3812)21-46-40 Орел (4862)44-53-42 Оренбург (3532)37-68-04 Пенза (8412)22-31-16 Петрозаводск (8142)55-98-37 Псков (8112)59-10-37 Пермь (342)205-81-47	Ростов-на-Дону (863)308-18-15 Рязань (4912)46-61-64 Самара (846)206-03-16 Санкт-Петербург (812)309-46-40 Саратов (845)249-38-78 Севастополь (8692)22-31-93 Саранск (8342)22-96-24 Симферополь (3652)67-13-56 Смоленск (4812)29-41-54 Сочи (862)225-72-31 Ставрополь (8652)20-65-13 Сургут (3462)77-98-35 Сыктывкар (8212)25-95-17 Тамбов (4752)50-40-97 Тверь (4822)63-31-35	Тольятти (8482)63-91-07 Томск (3822)98-41-53 Тула (4872)33-79-87 Тюмень (3452)66-21-18 Ульяновск (8422)24-23-59 Улан-Удэ (3012)59-97-51 Уфа (347)229-48-12 Хабаровск (4212)92-98-04 Чебоксары (8352)28-53-07 Челябинск (351)202-03-61 Череповец (8202)49-02-64 Чита (3022)38-34-83 Якутск (4112)23-90-97 Ярославль (4852)69-52-93
Россия +7(495)268-04-70	Казахстан +7(727)345-47-04	Беларусь +(375)257-127-884	Узбекистан +998(71)205-18-59	Киргизия +996(312)96-26-47

эл.почта: hib@nt-rt.ru || сайт: <https://hibu.nt-rt.ru/>