

Льдогенераторы кубикового льда NU

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: hib@nt-rt.ru || сайт: <https://hibu.nt-rt.ru/>

NU 100 XSafe


Self Contained Ice Machine 56 kg

		FEATURES • Front-in & front-out air flow: no need to leave space on the back. • Resistant stainless steel exterior. • High grade appearance. • Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer. • Ergonomic access to ice with sliding disappearing door: one touch door lift makes barman's life significantly easier. • One touch cleaning: reduces labor costs and saves time and simplifies cleaning process. • Routine Maintenance visible alarm light on front panel. • Built-in storage bin: allows undercounter installations for easier fit-in solution, specifically for coffee shops. • XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.	
 NU 100 Dice 10 g W 22 x D 22 x H 22 mm  NU H 100 Half Dice 6 g W 10 x D 22 x H 28 mm  NU L 100 Large Dice 15 g W 28 x D 22 x H 28 mm	CONDENSING SYSTEM Air cooled Water cooled	INTERNAL BIN CAPACITY 20 kg	
	REFRIGERANT GAS R404A R452A		
	VOLTAGE V/Hz/ph 230/50/1 230/60/1		
		OPERATING REQUIREMENTS	
			MinimumMaximum
		Air temperature	1040
		Water temperature	535
		Water pressure	1 bar (14 psi)5 bar (70 psi)
		Electrical voltage	-10%+10%

Self Contained Ice Machine 56 kg

NU 100 *XSafe*

Self Contained Ice Machine 56 kg

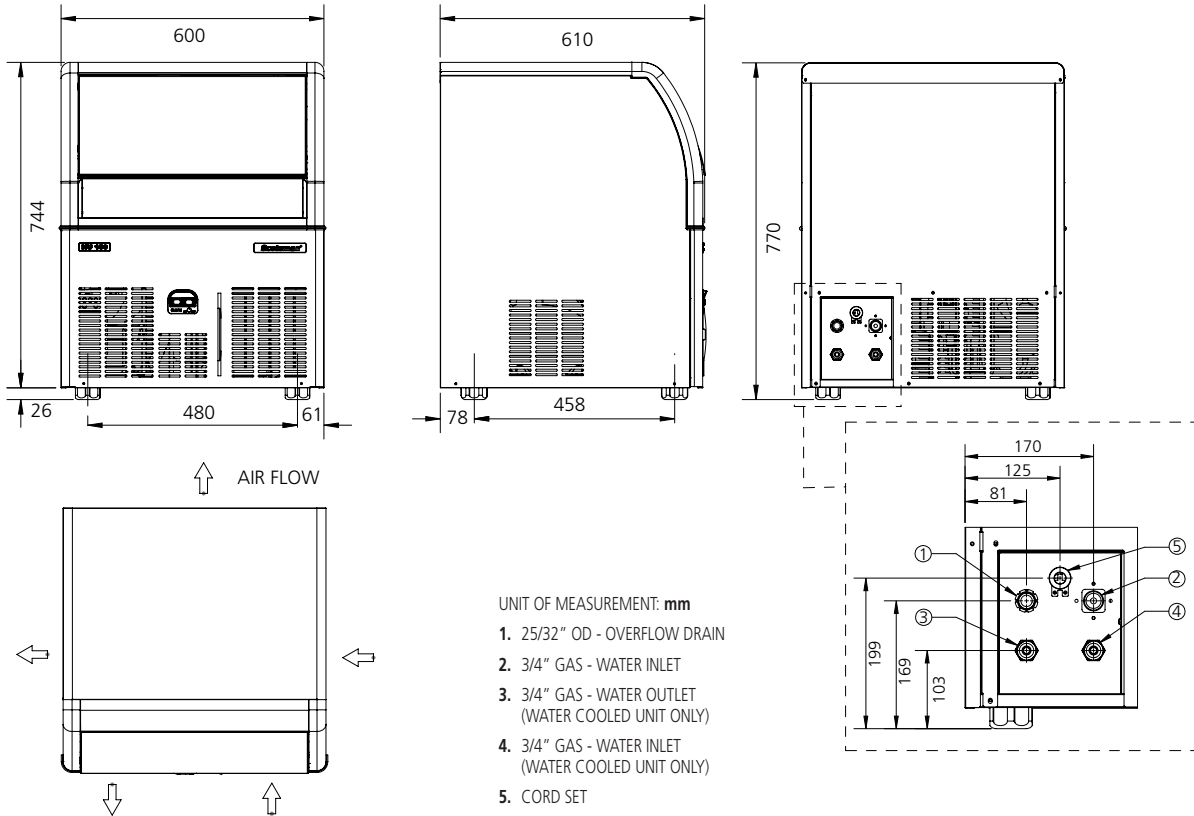

UNIT DATA				SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions			
Size (W x D x H)		600 x 610 x 770 mm		Carton (W x D x H)		670 x 680 x 920 mm					
Net weight		50 kg		Weight		60 kg					
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
NUH 100 AS	230/50/1	56	45	32	27.8	8.9	3.5	450	780	3 x 1.5	10
NUH 100 WS	230/50/1	56	45	32	27.8	8.9	26.4	450	780	3 x 1.5	10
NUL 100 AS	230/50/1	60	50	40	27.8	11.1	4.4	450	780	3 x 1.5	10
NUL 100 WS	230/50/1	60	50	40	27.8	11.1	33.1	450	780	3 x 1.5	10
NU 100 AS	230/50/1	56	45	32	27.8	8.9	3.5	450	780	3 x 1.5	10
NU 100 WS	230/50/1	56	45	32	27.8	8.9	26.4	450	780	3 x 1.5	10

NU 150 XSafe


Self Contained Ice Machine 85 kg

		FEATURES • Front-in & front-out air flow: no need to leave space on the back. • Resistant stainless steel exterior. • High grade appearance. • Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer. • Ergonomic access to ice with sliding disappearing door: one touch door lift makes barman's life significantly easier. • One touch cleaning: reduces labor costs and saves time and simplifies cleaning process. • Routine Maintenance visible alarm light on front panel. • Built-in storage bin: allows undercounter installations for easier fit-in solution, specifically for coffee shops. • XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.		
 NU 150 Dice 10 g W 22 x D 22 x H 22 mm  NU H 150 Half Dice 6 g W 10 x D 22 x H 28 mm  NU L 150 Large Dice 15 g W 28 x D 22 x H 28 mm	CONDENSING SYSTEM Air cooled Water cooled	REFRIGERANT GAS R404A R452A	INTERNAL BIN CAPACITY 20 kg	
	VOLTAGE V/Hz/ph 230/50/1 230/60/1			
	OPERATING REQUIREMENTS			
		Minimum	Maximum	
Air temperature		10	40	
Water temperature		5	35	
Water pressure		1 bar (14 psi)	5 bar (70 psi)	
Electrical voltage		-10%	+10%	

Self Contained Ice Machine 85 kg

NU 150 *XSafe*

Self Contained Ice Machine 85 kg

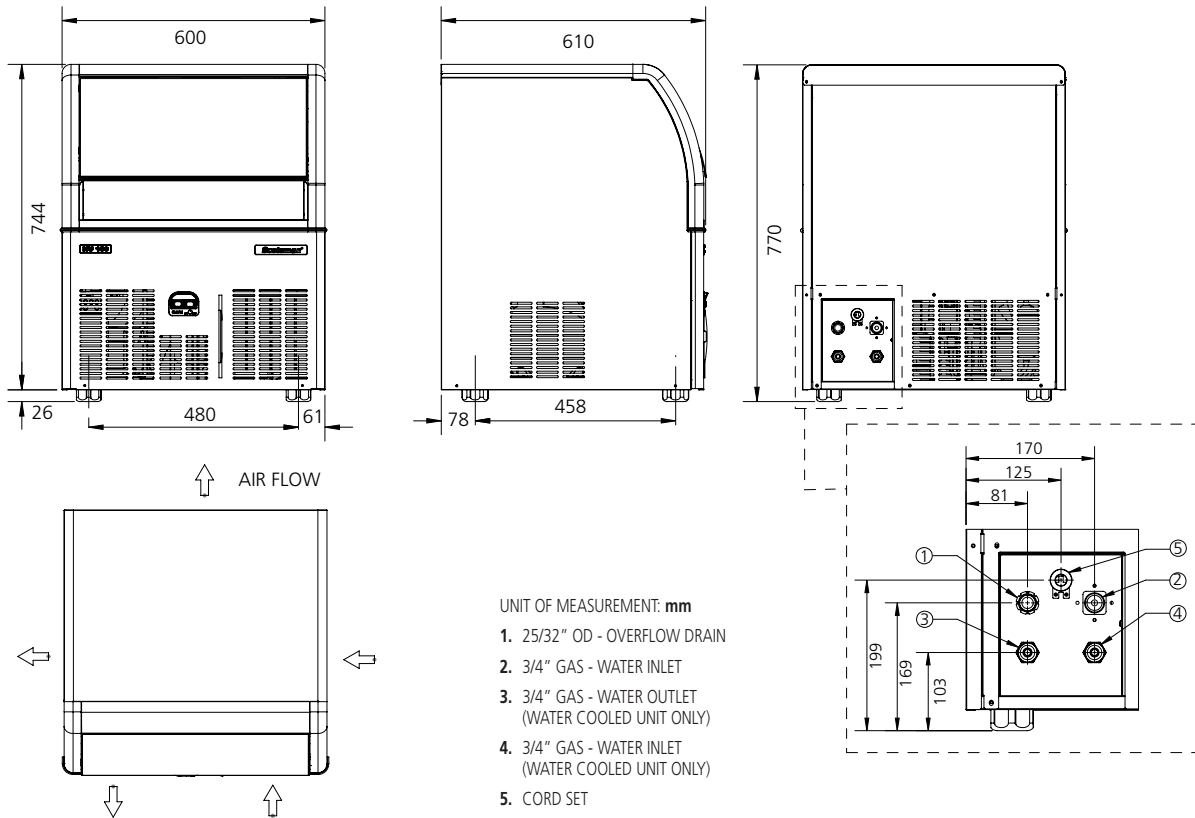

UNIT DATA				SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions			
Size (W x D x H)		600 x 610 x 770 mm		Carton (W x D x H)		670 x 680 x 920 mm					
Net weight		50 kg		Weight		62 kg					
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
NUH 150 AS	230/50/1	85	70	50	19.4	9.7	3.4	500	990	3 x 1.5	10
NUH 150 WS	230/50/1	85	70	70	10.8	7.6	52.7	500	990	3 x 1.5	10
NUL 150 AS	230/50/1	80	70	50	19.4	9.7	3.4	500	990	3 x 1.5	10
NUL 150 WS	230/50/1	80	70	65	10.8	7.0	48.9	500	990	3 x 1.5	10
NU 150 AS	230/50/1	85	68	48	18.7	9.0	3.3	500	990	3 x 1.5	10
NU 150 WS	230/50/1	85	80	70	10.8	7.6	52.7	500	990	3 x 1.5	10

NU 220 XSafe


Self Contained Ice Machine 109 kg

		FEATURES • Front-in & front-out air flow: no need to leave space on the back. • Resistant stainless steel exterior. • High grade appearance. • Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer. • Ergonomic access to ice with sliding disappearing door: one touch door lift makes barman's life significantly easier. • One touch cleaning: reduces labor costs and saves time and simplifies cleaning process. • Routine Maintenance visible alarm light on front panel. • Built-in storage bin: allows undercounter installations for easier fit-in solution, specifically for coffee shops. • XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.	
 NU 220 Dice 10 g W 22 x D 22 x H 22 mm  NU H 220 Half Dice 6 g W 10 x D 22 x H 28 mm  NU L 220 Large Dice 15 g W 28 x D 22 x H 28 mm	CONDENSING SYSTEM Air cooled Water cooled	INTERNAL BIN CAPACITY 37 kg	
	REFRIGERANT GAS R404A R452A		
	VOLTAGE V/Hz/ph 230/50/1 230/60/1		
		OPERATING REQUIREMENTS	
		Minimum	Maximum
Air temperature		10	40
Water temperature		5	35
Water pressure		1 bar (14 psi)	5 bar (70 psi)
Electrical voltage		-10%	+10%

Self Contained Ice Machine 109 kg

NU 220 *XSafe*

Self Contained Ice Machine 109 kg

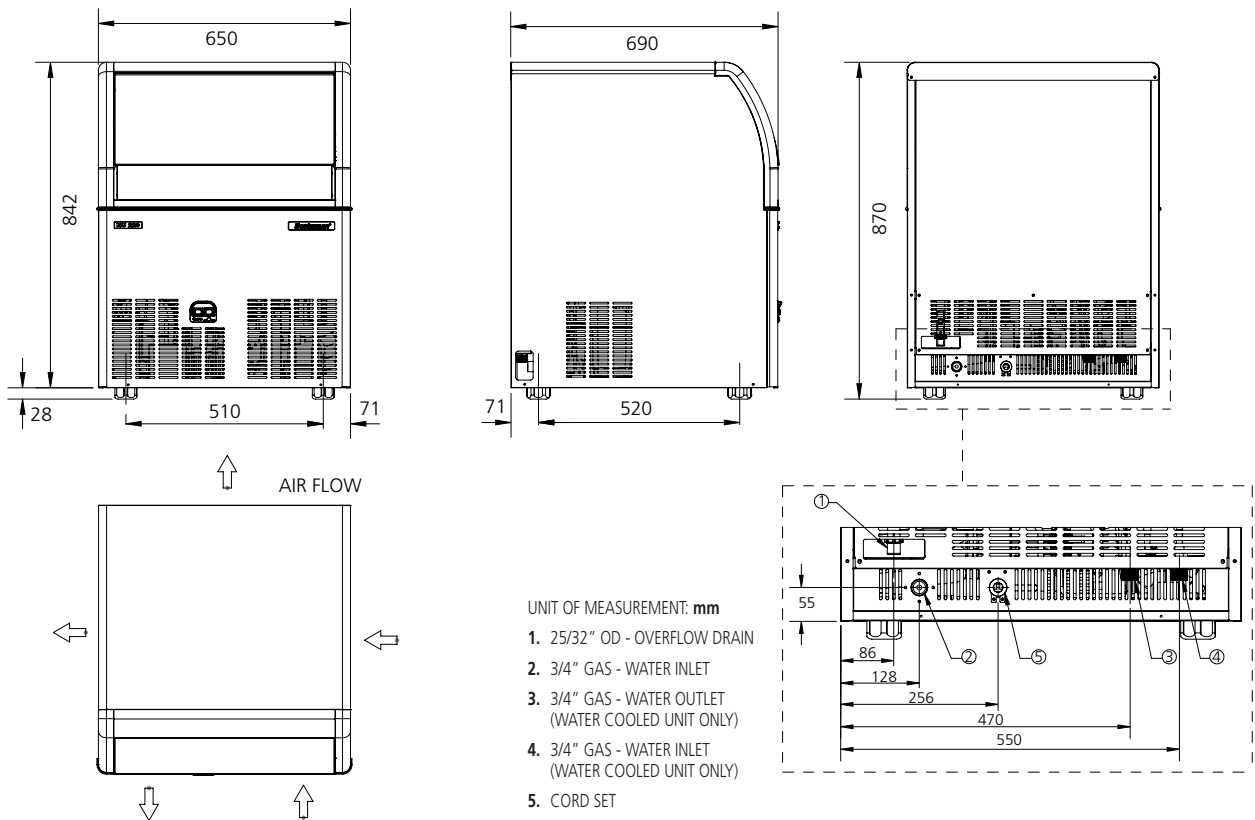

UNIT DATA				SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions			
Size (W x D x H)		650 x 690 x 870 mm		Carton (W x D x H)		730 x 770 x 1015 mm					
Net weight		63 kg		Weight		77.5 kg					
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
NUH 220 AS	230/50/1	104	98	65	19.8	12.9	4.5	600	1266	3 x 1.5	10
NUH 220 WS	230/50/1	104	98	85	12.1	10.2	68.7	600	1266	3 x 1.5	10
NUL 220 AS	230/50/1	105	95	70	19.8	13.9	4.8	600	1266	3 x 1.5	10
NUL 220 WS	230/50/1	105	95	80	12.1	9.7	64.7	600	1266	3 x 1.5	10
NU 220 AS	230/50/1	109	100	70	19.8	13.9	4.8	600	1266	3 x 1.5	10
NU 220 WS	230/50/1	109	100	85	12.1	10.3	68.7	600	1266	3 x 1.5	10

NU 227 XSafe


Self Contained Ice Machine 105 kg

		FEATURES • Front-in & front-out air flow: no need to leave space on the back. • Resistant stainless steel exterior. • High grade appearance. • Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer. • Ergonomic access to ice with sliding disappearing door: one touch door lift makes barman's life significantly easier. • One touch cleaning: reduces labor costs and saves time and simplifies cleaning process. • Routine Maintenance visible alarm light on front panel. • Built-in storage bin: allows undercounter installations for easier fit-in solution, specifically for coffee shops. • XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.	
 NU 227 Dice 10 g W 22 x D 22 x H 22 mm  NU H 227 Half Dice 6 g W 10 x D 22 x H 28 mm  NU L 227 Large Dice 15 g W 28 x D 22 x H 28 mm	CONDENSING SYSTEM Air cooled Water cooled	INTERNAL BIN CAPACITY 37 kg	
	REFRIGERANT GAS R290		
	VOLTAGE V/Hz/ph 230/50/1		
	OPERATING REQUIREMENTS		
	Minimum	Maximum	
Air temperature	10	40	
Water temperature	5	35	
Water pressure	1 bar (14 psi)	5 bar (70 psi)	
Electrical voltage	-10%	+10%	

Self Contained Ice Machine 105 kg

NU 227 *XSafe*

Self Contained Ice Machine 105 kg

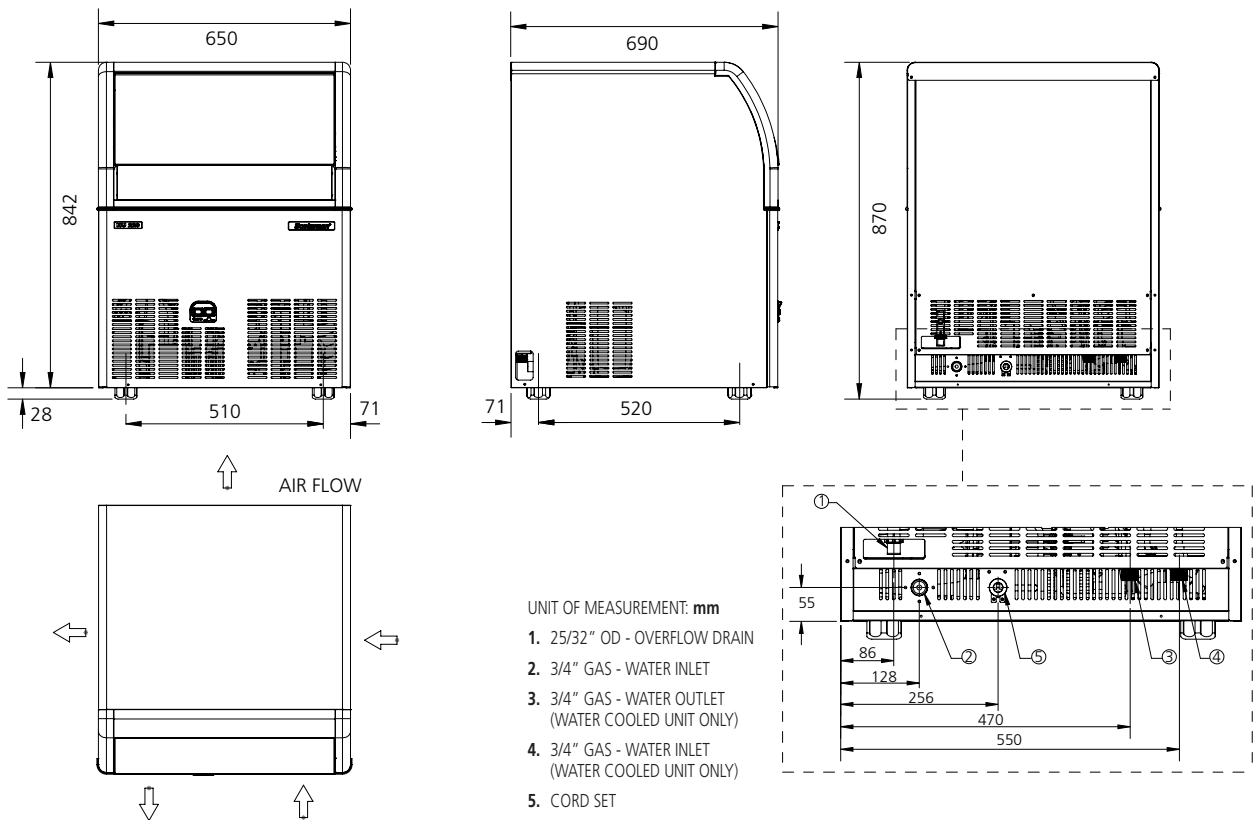

UNIT DATA				SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions			
Size (W x D x H)		650 x 690 x 870 mm		Carton (W x D x H)		730 x 770 x 1015 mm					
Net weight		63 kg		Weight		77.5 kg					
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
NU 227 AS	230/50/1	kg	kg	kg							
NUH 227 AS	230/50/1	105	95	68	15.4	10.5	5.5	480	670	3 x 1.5	10
NUH 227 AS	230/50/1	104	95	71	15.1	10.7	7.5	480	670	3 x 1.5	10
NUL 227 AS	230/50/1	105	93	68	15.4	10.5	7.1	480	670	3 x 1.5	10

NU 300 XSafe


Self Contained Ice Machine 142 kg

		FEATURES • Front-in & front-out air flow: no need to leave space on the back. • Resistant stainless steel exterior. • High grade appearance. • Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer. • Ergonomic access to ice with sliding disappearing door: one touch door lift makes barman's life significantly easier. • One touch cleaning: reduces labor costs and saves time and simplifies cleaning process. • Routine Maintenance visible alarm light on front panel. • Built-in storage bin: allows undercounter installations for easier fit-in solution, specifically for coffee shops. • XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.		
 NU 300 Dice 10 g W 22 x D 22 x H 22 mm  NU H 300 Half Dice 6 g W 10 x D 22 x H 28 mm  NU L 300 Large Dice 15 g W 28 x D 22 x H 28 mm	CONDENSING SYSTEM Air cooled Water cooled	INTERNAL BIN CAPACITY 37 kg		
	REFRIGERANT GAS R404A R452A			
	VOLTAGE V/Hz/ph 230/50/1 230/60/1			
		OPERATING REQUIREMENTS		
		Minimum	Maximum	
		Air temperature	10	40
		Water temperature	5	35
		Water pressure	1 bar (14 psi)	5 bar (70 psi)
		Electrical voltage	-10%	+10%

Self Contained Ice Machine 142 kg

NU 300 *XSafe*

Self Contained Ice Machine 142 kg

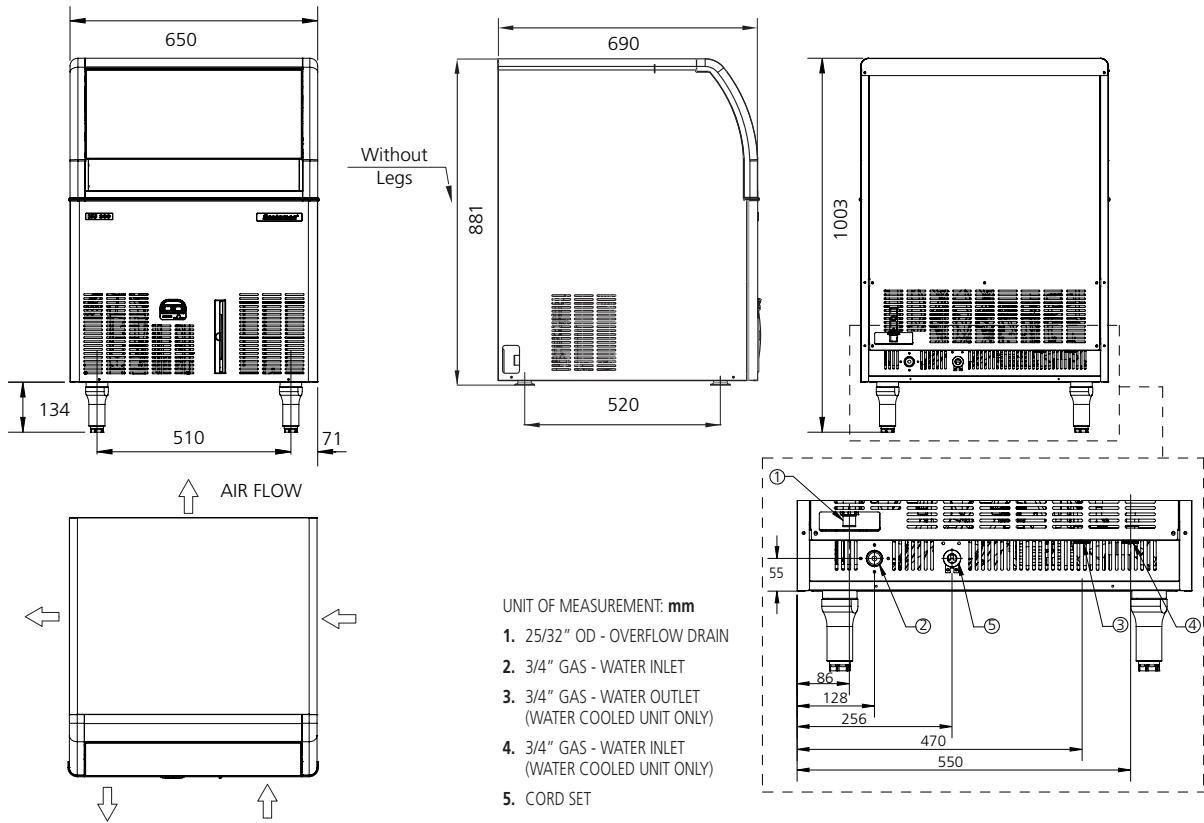

UNIT DATA				SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions			
Size (W x D x H)		650 x 690 x 1003 mm		Carton (W x D x H)		730 x 770 x 1050 mm					
Net weight		65 kg		Weight		77 kg					
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
NUH 300 AS	230/50/1	128	121	92	17.6	16.2	5.7	950	1767	3 x 1.5	16
NUH 300 WS	230/50/1	130	130	115	12.1	13.9	89.8	950	1767	3 x 1.5	16
NUL 300 AS	230/50/1	142	130	93	17.6	16.4	5.8	950	1767	3 x 1.5	16
NUL 300 WS	230/50/1	142	130	100	12.1	12.1	78.1	950	1767	3 x 1.5	16
NU 300 AS	230/50/1	142	135	100	17.6	17.6	6.2	950	1767	3 x 1.5	16
NU 300 WS	230/50/1	135	130	115	12.1	13.9	89.8	950	1767	3 x 1.5	16

NU 307 XSafe


Self Contained Ice Machine 139 kg

		FEATURES • Front-in & front-out air flow: no need to leave space on the back. • Resistant stainless steel exterior. • High grade appearance. • Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer. • Ergonomic access to ice with sliding disappearing door: one touch door lift makes barman's life significantly easier. • One touch cleaning: reduces labor costs and saves time and simplifies cleaning process. • Routine Maintenance visible alarm light on front panel. • Built-in storage bin: allows undercounter installations for easier fit-in solution, specifically for coffee shops. • XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.		
 NU 307 Dice 10 g W 22 x D 22 x H 22 mm	CONDENSING SYSTEM Air cooled		INTERNAL BIN CAPACITY 37 kg	
	REFRIGERANT GAS R290			
	VOLTAGE V/Hz/ph 230/50/1 230/60/1			
 NU H 307 Half Dice 6 g W 10 x D 22 x H 28 mm	OPERATING REQUIREMENTS			
 NU L 307 Large Dice 15 g W 28 x D 22 x H 28 mm				

Self Contained Ice Machine 139 kg

NU 307 *XSafe*

Self Contained Ice Machine 139 kg

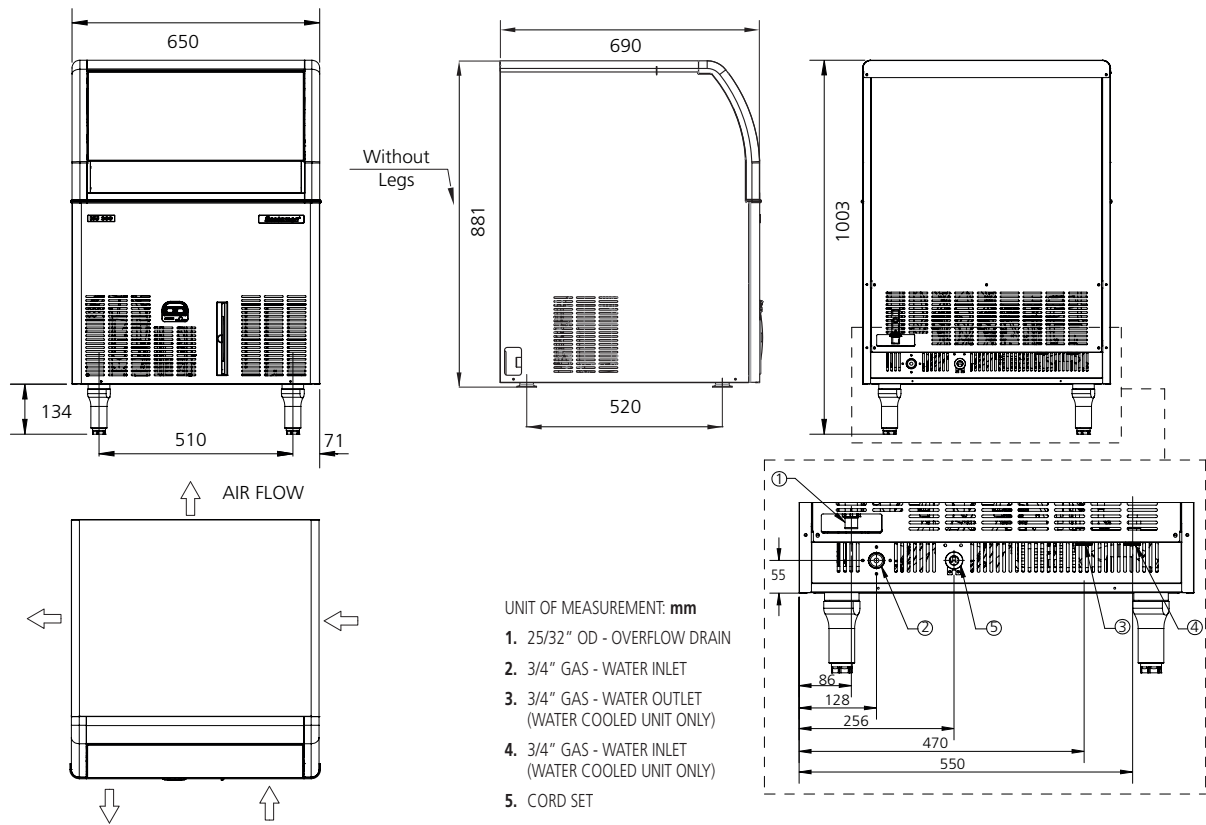

UNIT DATA				SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions			
Size (W x D x H)		650 x 690 x 1003 mm		Carton (W x D x H)		730 x 770 x 1050 mm					
Net weight		65 kg		Weight		77 kg					
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
NU 307 AS	230/50/1	139	125	99	12.4	12.3	6.9	525	949	3 x 1.5	10
NUH 307 AS	230/50/1	137	129	98	13	12.7	9.4	525	949	3 x 1.5	10
NUL 307 AS	230/50/1	130	117	90	13.4	12	7.6	525	949	3 x 1.5	10

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

По вопросам продаж и поддержки обращайтесь:

эл.почта: hib@nt-rt.ru || сайт: <https://hibu.nt-rt.ru/>