

Льдогенераторы конусного льда (гурме) ЕС

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: hib@nt-rt.ru || сайт: <https://hibu.nt-rt.ru/>

EC 47 EcoX XSafe

Self Contained Ice Machine 25 kg



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled model only).
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- Water system protected by patented anti-scale system.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.
- Legs are not included and must be ordered separately as an accessory.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



EC M 47
Medium Gourmet 20 g
Ø 30 x H 34 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R290

VOLTAGE V/Hz/ph

230/50/1

INTERNAL BIN CAPACITY


9 kg

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

Self Contained Ice Machine 25 kg

Self Contained Ice Machine 25 kg

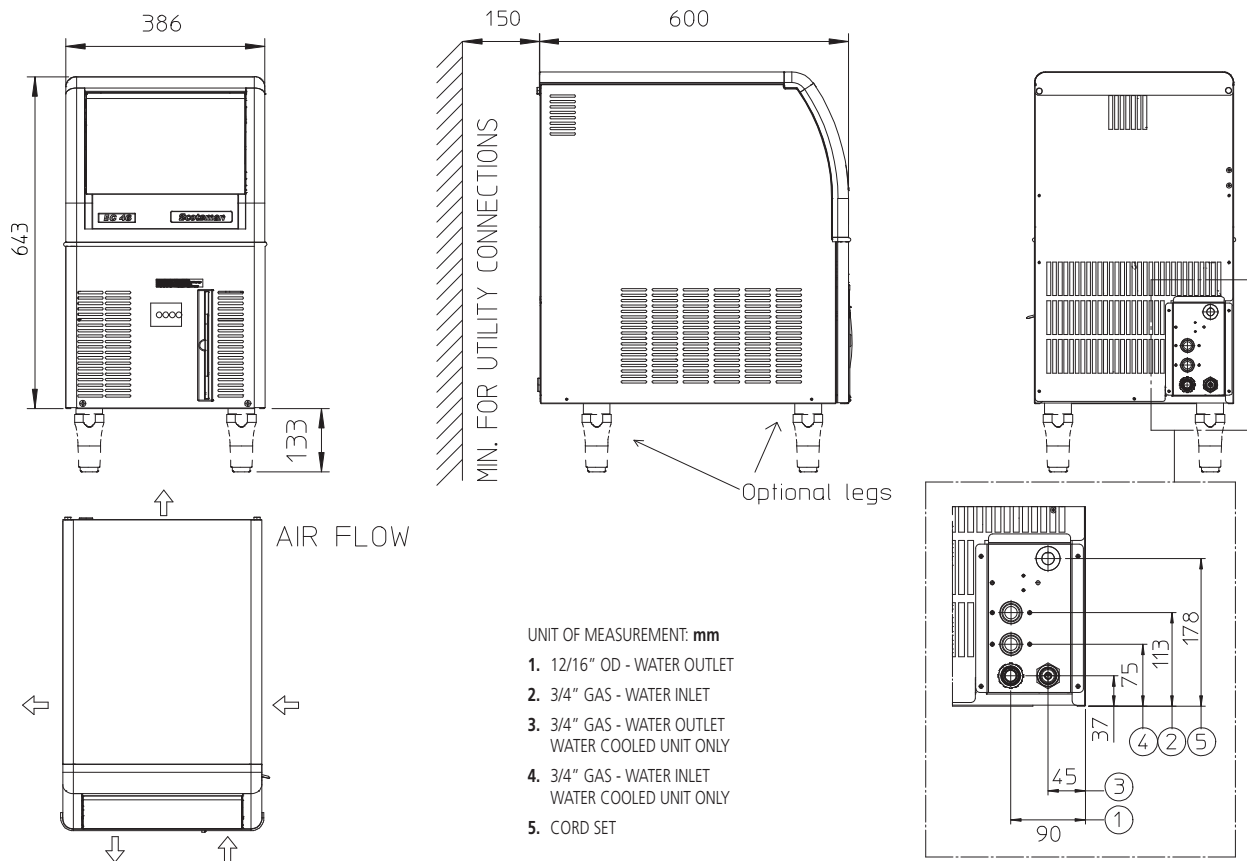

UNIT DATA					SHIPPING DATA						
Size (W x D x H)		386 x 600 x 645 mm			Carton (W x D x H)		460 x 670 x 760 mm				
Net weight		37 kg			Weight		44 kg				
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
ECM 47 AS	230/50/1	25	24	18	32.2	5.8	4.0	320	616	3 x 1.0	10
ECM 47 WS	230/50/1	27	25	21	22.9	4.8	21.4	280	616	3 x 1.0	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

EC 57 EcoX XSafe

Self Contained Ice Machine 33 kg



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled model only).
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- Water system protected by patented anti-scale system.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.
- Legs are not included and must be ordered separately as an accessory.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



EC M 57
Medium Gourmet 20 g
Ø 30 x H 34 mm



EC S 57
Small Gourmet 8 g
Ø 21 x H 25 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R290

VOLTAGE V/Hz/ph

230/50/1

INTERNAL BIN CAPACITY

12 kg


OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

Self Contained Ice Machine 33 kg

EC 57 EcoX XSafe

Self Contained Ice Machine 33 kg

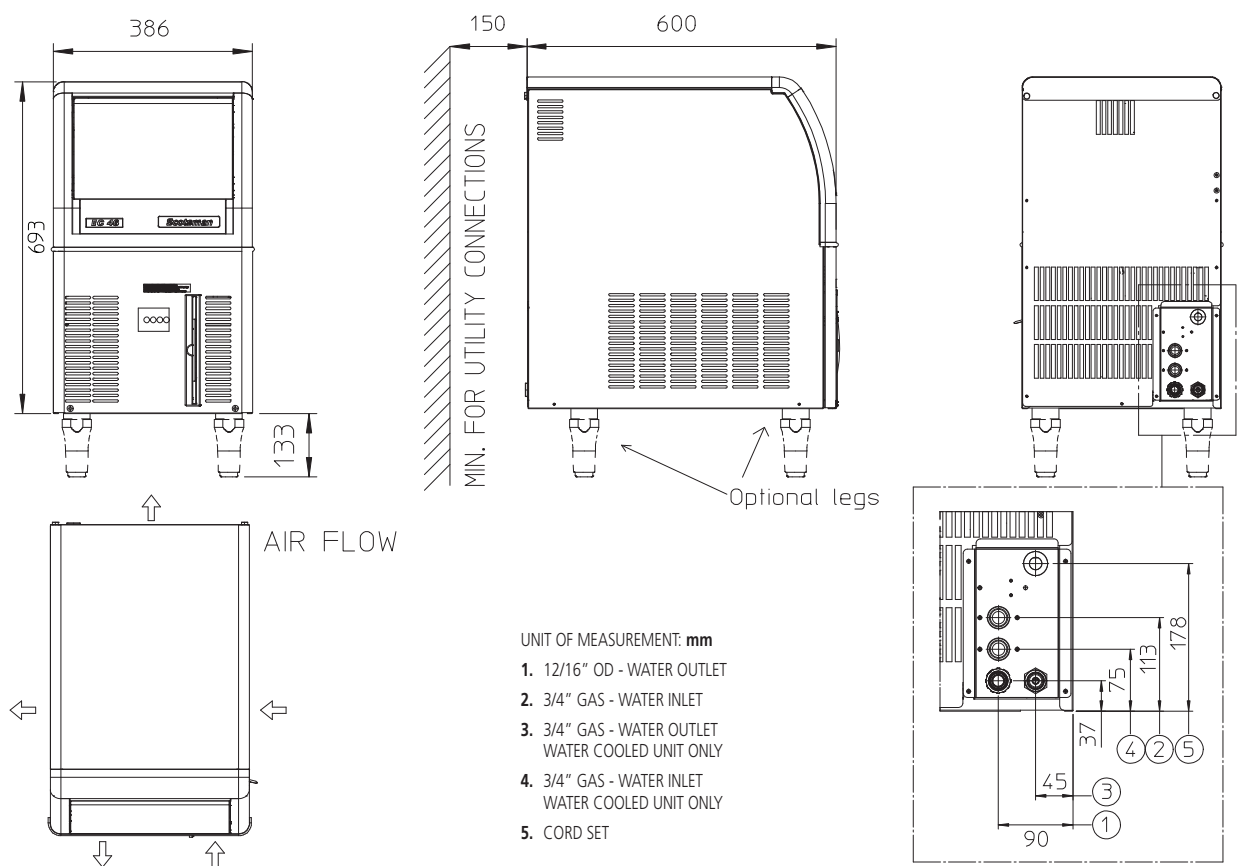

UNIT DATA					SHIPPING DATA						
Size (W x D x H)		386 x 600 x 695 mm			Carton (W x D x H)		460 x 670 x 810 mm				
Net weight		38 kg			Weight		45 kg				
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
ECM 57 AS	230/50/1	33	31	25	27.0	6.6	4.0	370	730	1 x 1.5	10
ECM 57 WS	230/50/1	34	33	29	19.7	5.7	23.4	300	730	1 x 1.0	10
ECS 57 AS	230/50/1	28	27	22	30.9	6.8	4.0	370	730	1 x 1.0	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

EC 87 EcoX XSafe

Self Contained Ice Machine 44 kg



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled model only).
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- Water system protected by patented anti-scale system.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



EC M 87
Medium Gourmet 20 g
Ø 30 x H 34 mm



EC S 87
Small Gourmet 8 g
Ø 21 x H 25 mm

CONDENSING SYSTEM

Air cooled

REFRIGERANT GAS

R290

VOLTAGE V/Hz/ph

230/50/1

INTERNAL BIN CAPACITY


19 kg

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

Self Contained Ice Machine 44 kg

Self Contained Ice Machine 44 kg

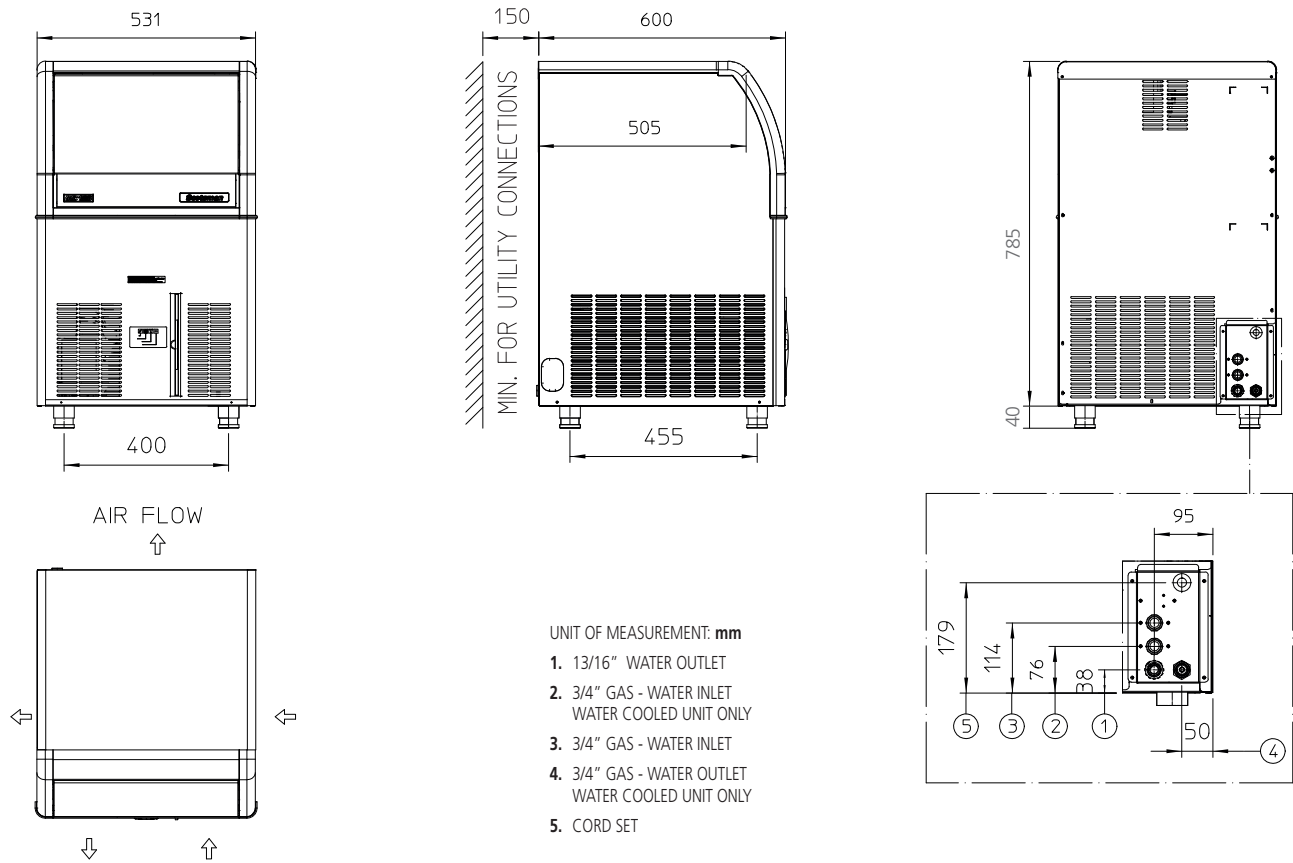

UNIT DATA				SHIPPING DATA							
Size (W x D x H)		531 x 600 x 825 mm		Carton (W x D x H)		600 x 670 x 890 mm					
Net weight		46 kg		Weight		53 kg					
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
ECM 87 AS	230/50/1	44	44	35	30.7	10.8	3.4	570	1215	3 x 1.5	10
ECS 87 AS	230/50/1	40	39	31	35.8	11.1	5.0	580	1215	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

EC 107 EcoX XSafe

Self Contained Ice Machine 53 kg



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Routine maintenance visible alarm light on front panel.
- Ergonomically designed ice-storage access, with disappearing door. Do-or-closing movement dampening system.
- Water system protected by patented anti-scale system.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



EC M 107
Medium Gourmet 20 g
Ø 30 x H 34 mm

CONDENSING SYSTEM

Air cooled

REFRIGERANT GAS

R290

VOLTAGE V/Hz/ph

230/50/1

INTERNAL BIN CAPACITY

23 kg


OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

Self Contained Ice Machine 53 kg

EC 107 XSafe

Self Contained Ice Machine 53 kg

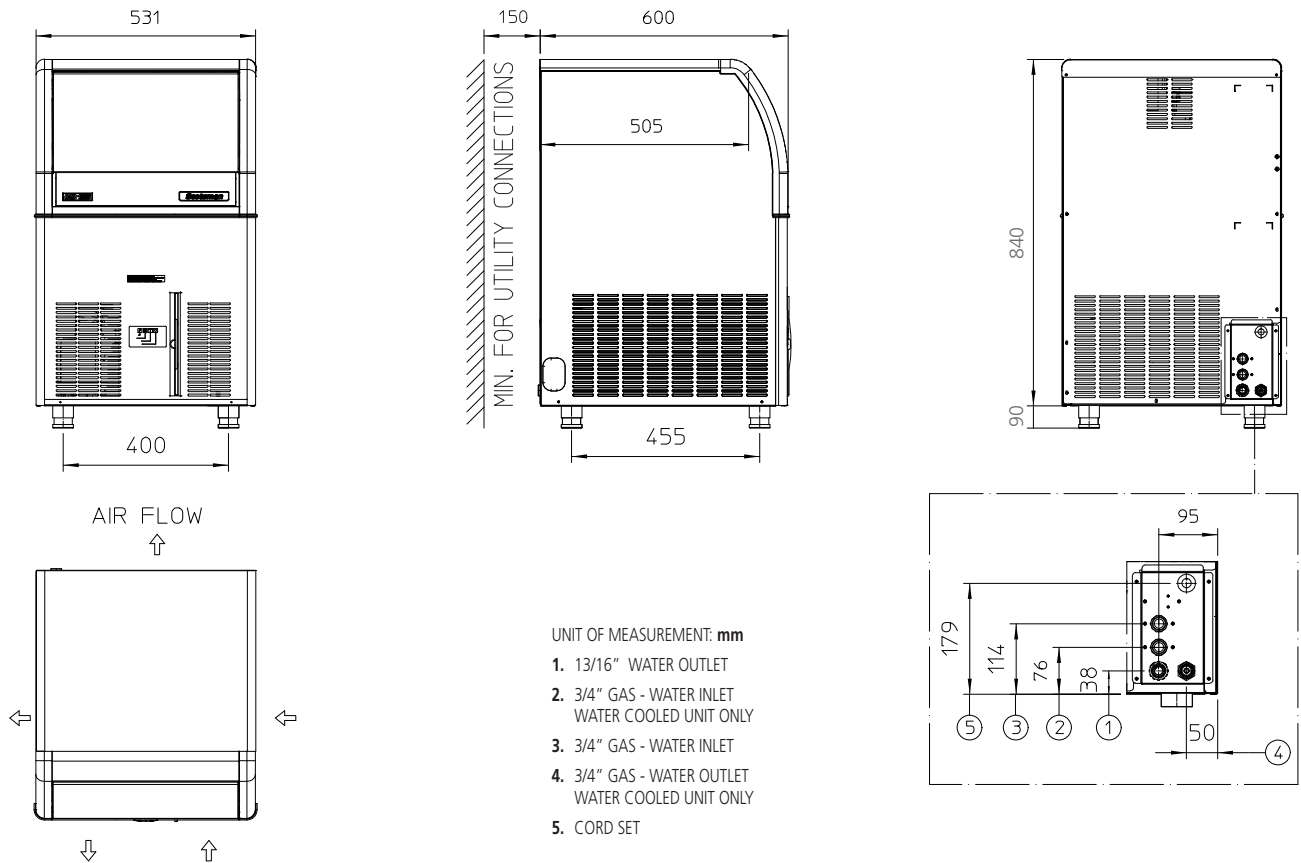

UNIT DATA				SHIPPING DATA							
Size (W x D x H)		531 x 600 x 930 mm		Carton (W x D x H)		600 x 670 x 950 mm					
Net weight		49 kg		Weight		56 kg					
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
ECM 107 AS	230/50/1	53	51	43	24.9	10.7	5.2	580	1215	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

EC 127 EcoX XSafe

Self Contained Ice Machine 75 kg



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only).
- Routine maintenance visible alarm light on front panel. Water system protected by patented anti-scale system.
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



EC M 127
Medium Gourmet 20 g
Ø 30 x H 34 mm

CONDENSING SYSTEM

Air cooled

REFRIGERANT GAS

R290

VOLTAGE V/Hz/ph

230/50/1

INTERNAL BIN CAPACITY

39 kg


OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

Self Contained Ice Machine 75 kg

EC 127 EcoX Safe

Self Contained Ice Machine 75 kg

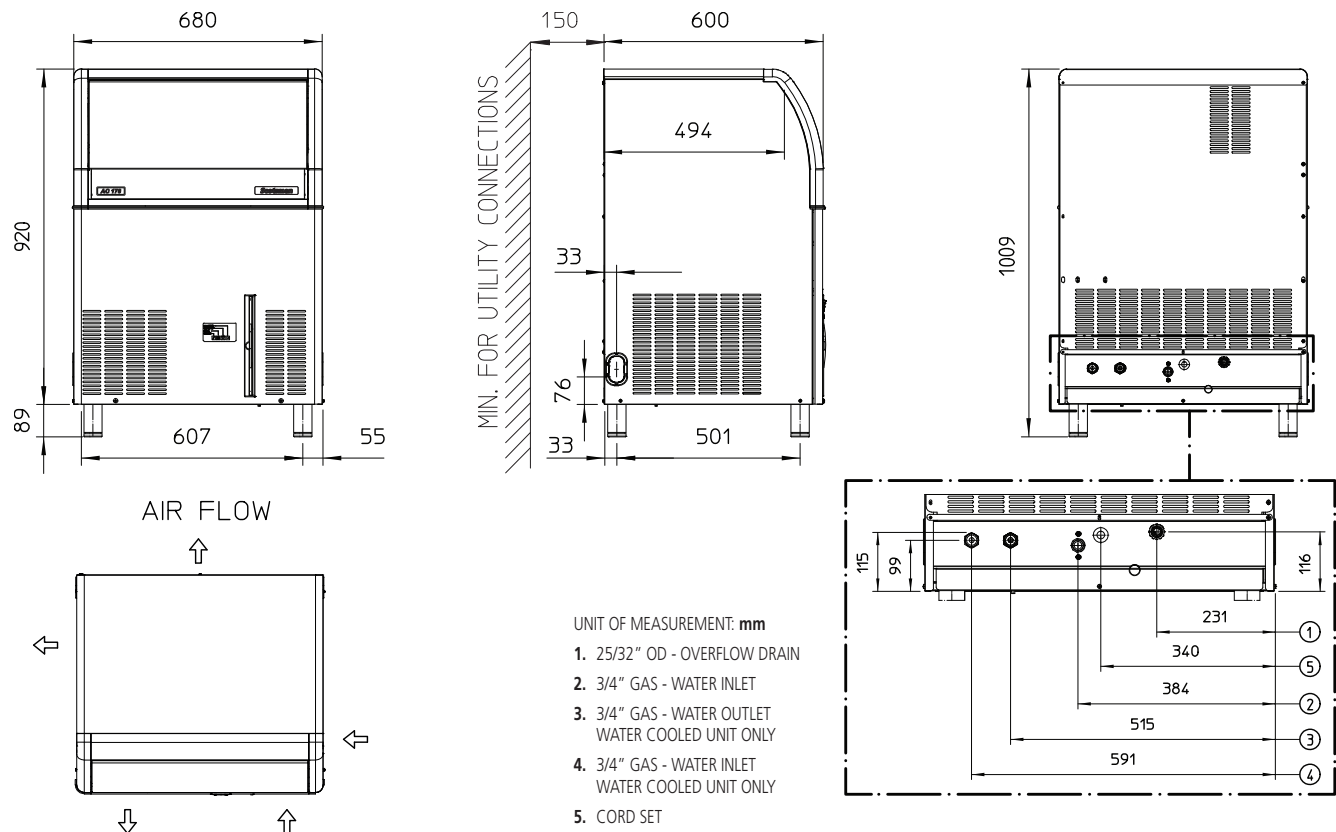

UNIT DATA				SHIPPING DATA							
Size (W x D x H)		680 x 600 x 1009 mm		Carton (W x D x H)		750 x 670 x 1100 mm					
Net weight		67 kg		Weight		77 kg					
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
ECM 127 AS	230/50/1	75	74	60	21.5	12.9	7.4	670	1400	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

EC 177

XSafe

Self Contained Ice Machine 83 kg


					FEATURES • Produces individual Gourmet crystal clear ice cubes. • Resistant stainless steel exterior. • Advanced diagnostics computerized controls. • Front access condenser air filter, removable and washable (air cooled version only). • Front panel in & out airflow (air-cooled model only) for built-in installation. • PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters. • XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.																		
 EC L Large Gourmet  EC M Medium Gourmet <table><tr><th>Model</th><th>Cube</th><th>Ø</th><th>H</th><th>Weight</th></tr><tr><td>EC M</td><td>Medium</td><td>30 mm</td><td>34 mm</td><td>20 g</td></tr><tr><td>EC L</td><td>Large</td><td>38 mm</td><td>41 mm</td><td>39 g</td></tr></table>					Model	Cube	Ø	H	Weight	EC M	Medium	30 mm	34 mm	20 g	EC L	Large	38 mm	41 mm	39 g	CONDENSING SYSTEM Air cooled Water cooled			
					Model	Cube	Ø	H	Weight														
					EC M	Medium	30 mm	34 mm	20 g														
EC L	Large	38 mm	41 mm	39 g																			
REFRIGERANT GAS R290																							
VOLTAGE V/HZ/PH 230\50\1																							
					OPERATING REQUIREMENTS <table><tr><td></td><td>Minimum</td><td>Maximum</td></tr><tr><td>Air temperature</td><td>10</td><td>43</td></tr><tr><td>Water temperature</td><td>5</td><td>38</td></tr><tr><td>Water pressure</td><td>1 bar (14 psi)</td><td>35 bar (70 psi)</td></tr><tr><td>Electrical voltage</td><td>-10%</td><td>+10%</td></tr></table>				Minimum	Maximum	Air temperature	10	43	Water temperature	5	38	Water pressure	1 bar (14 psi)	35 bar (70 psi)	Electrical voltage	-10%	+10%	
	Minimum	Maximum																					
Air temperature	10	43																					
Water temperature	5	38																					
Water pressure	1 bar (14 psi)	35 bar (70 psi)																					
Electrical voltage	-10%	+10%																					

Self Contained Ice Machine 83 kg

EC 177 *XSafe*

Self Contained Ice Machine 83 kg

Self Contained Ice Machine 83 kg

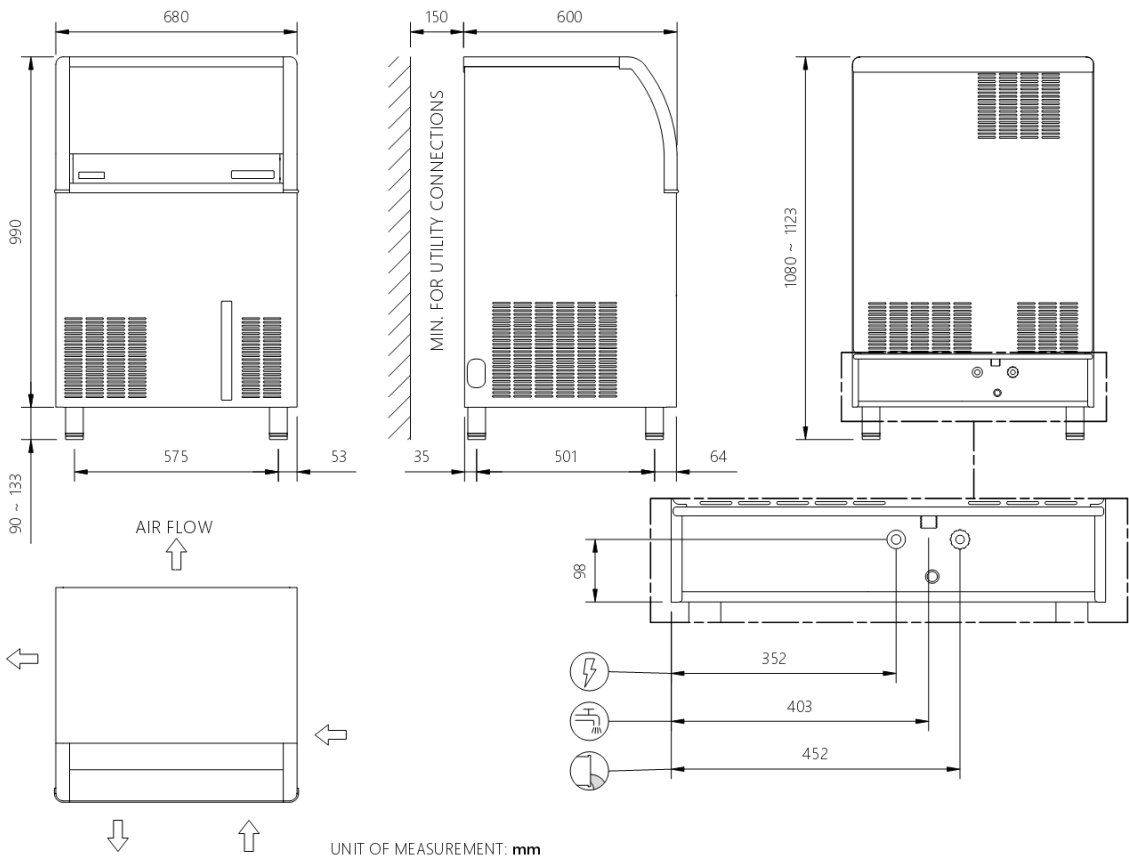

UNIT DATA			SHIPPING DATA			(*) Data refer to 32°C Amb. / 21°C Water temperature conditions						
Size (W x D x H)			Size (W x D x H)									
Net weight			Gross weight									
680 x 600 x 990 mm			1170 x 670 x 750 mm									
72 kg			82kg									
			24 h ice production kg C Amb. / °C Water			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kg	W	kWh/ 24h	l/h	W	No. x Ømm2	A
			kg	kg	kg							
ECM 177 AS	230\50\1	A	83	82	61	48	1,2	13	13	750	3 x 1,5	10
ECL 177 AS	230\50\1	W	78	74	67	48	1,2	12	52	620	3 x 1,5	10
EAM 177 AS	230\50\1	W	78	74	67	48	1,2	12	52	620	3 x 1,5	10
ECL 177 AS	230\50\1	A	69	66	57	48	1,2	15	8	830	3 x 1,5	10

EC 207 *XSafe* EcoX


Self Contained Ice Machine 145 kg

		FEATURES • Produces individual Gourmet crystal clear supercubes. • Resistant stainless steel exterior. • Front panel in and out airflow (air cooled model only) for built-in installation. • Front access condenser air filter, removable and washable (air cooled model only). • Easily accessible front ON-OFF switch. Routine maintenance visible alarm light on front panel. • Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system. • PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters. • XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.	
 EC M 207 Medium Gourmet 20 g Ø 30 x H 34 mm	CONDENSING SYSTEM Air cooled	INTERNAL BIN CAPACITY 50 kg	
	REFRIGERANT GAS R290		
	VOLTAGE V/Hz/ph 230/50/1		
		OPERATING REQUIREMENTS	
		Minimum	Maximum
		Air temperature	1043
		Water temperature	538
		Water pressure	1 bar (14 psi)5 bar (70 psi)
		Electrical voltage	-10%+10%

Self Contained Ice Machine 145 kg

EC 207 *xSafe EcoX*

Self Contained Ice Machine 145 kg

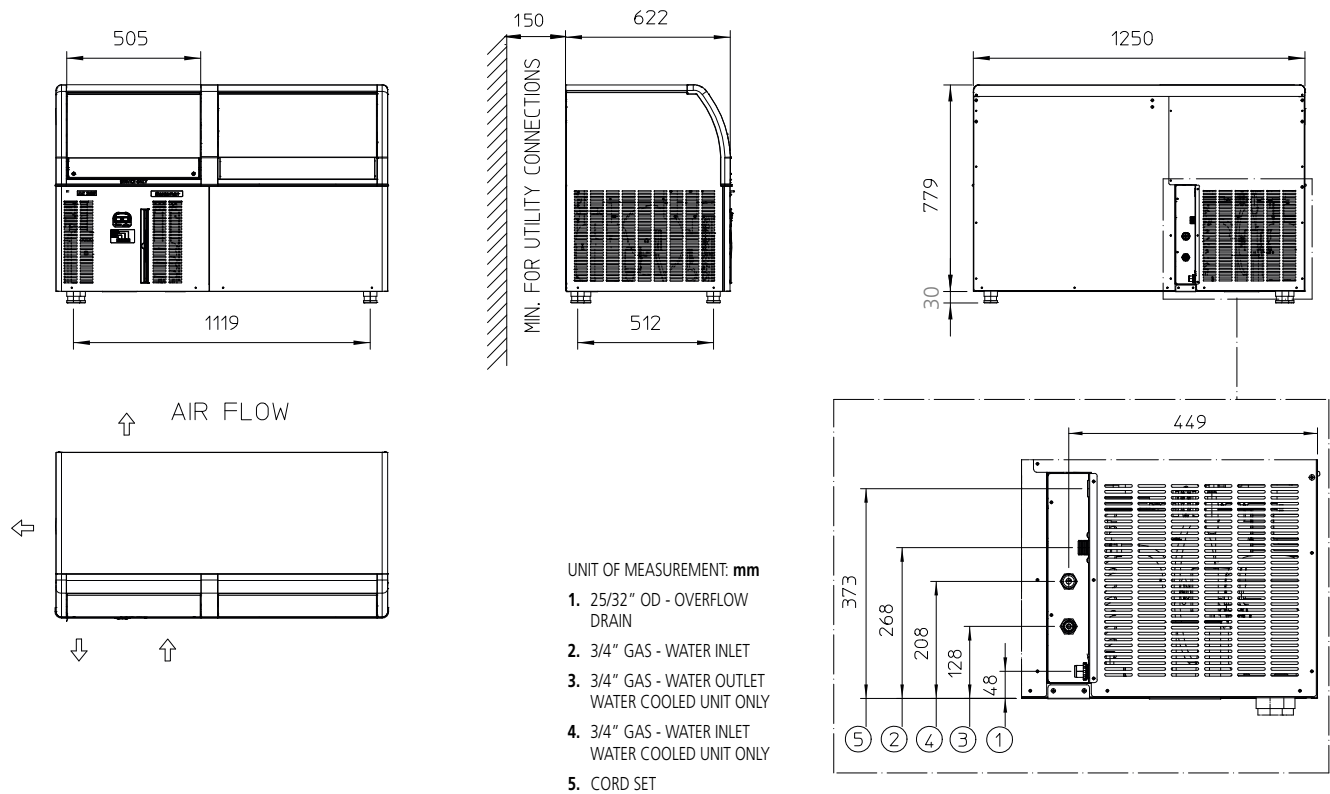

UNIT DATA					SHIPPING DATA						
Size (W x D x H)		1250 x 622 x 809 mm			Carton (W x D x H)		1320 x 690 x 960 mm				
Net weight		84 kg			Weight		97 kg				
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
ECM 207 AS	230/50/1	145	150	115	19.3	22.2	18	1170	1536	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

EC 227 *xSafe* EcoX

Self Contained Ice Machine 165 kg



FEATURES

- Produces individual Gourmet crystal clear supercubes.
- Resistant stainless steel exterior.
- Front panel in and out airflow (air cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled model only).
- Easily accessible front ON-OFF switch. Routine maintenance visible alarm light on front panel.
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



EC M 227
Medium Gourmet 20 g
Ø 30 x H 34 mm

CONDENSING SYSTEM

Air cooled

REFRIGERANT GAS

R290

VOLTAGE V/Hz/ph

230/50/1

INTERNAL BIN CAPACITY

70 kg


OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

Self Contained Ice Machine 165 kg

EC 227 *xSafe* EcoX

Self Contained Ice Machine 165 kg

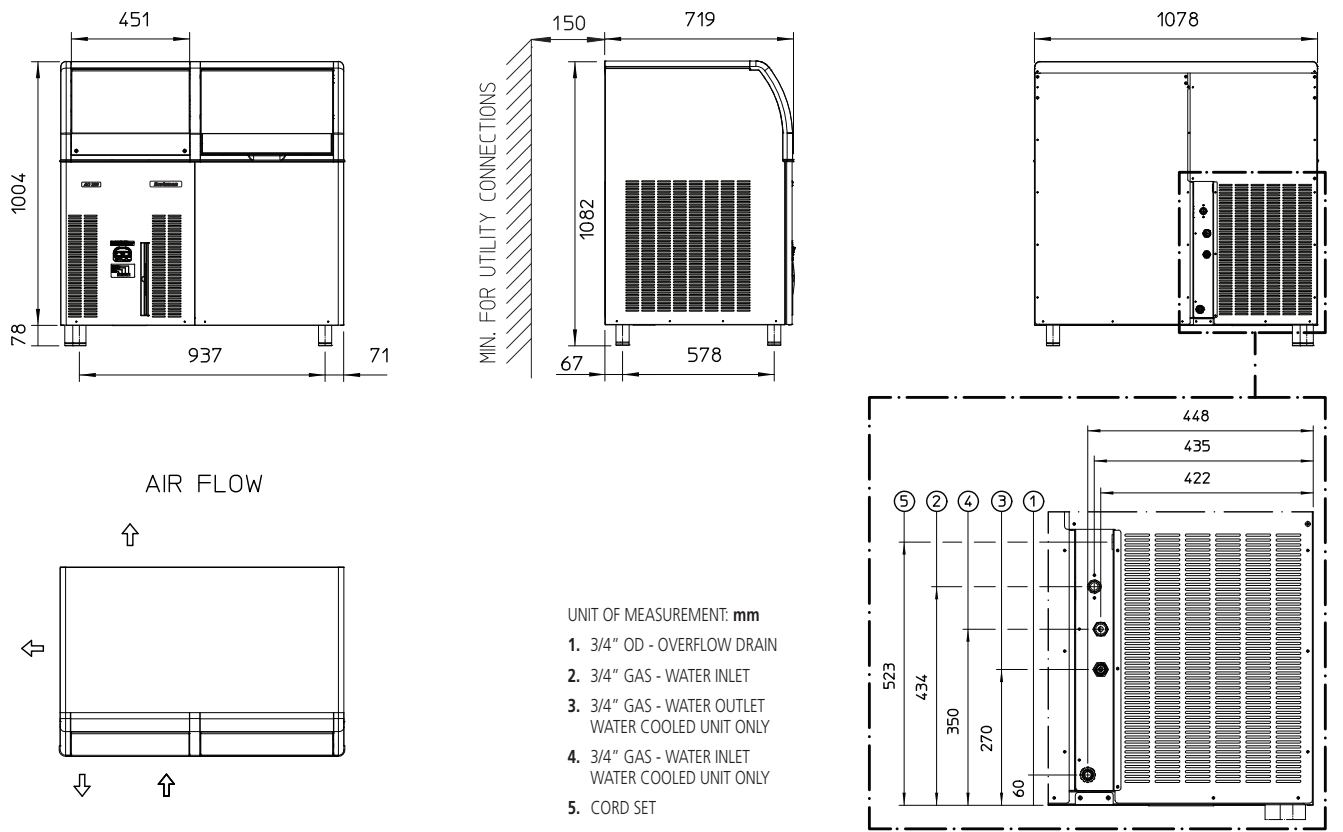

UNIT DATA				SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions			
Size (W x D x H)		1078 x 719 x 1082 mm		Carton (W x D x H)		1150 x 780 x 1160 mm					
Net weight		98 kg		Weight		112 kg					
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
ECM 227 AS	230/50/1	165	160	130	21.5	28	20.6	1400	3620	3 x 1.5	16

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

По вопросам продаж и поддержки обращайтесь:

эл.почта: hib@nt-rt.ru || сайт: <https://hibu.nt-rt.ru/>