

Льдогенераторы кубикового льда NW

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: hib@nt-rt.ru || сайт: <https://hibu.nt-rt.ru/>

NW 307 EcoX XSafe

Modular Ice Machine 190 kg

		FEATURES • Vertical Cube System. • T304 Stainless Steel Panels. • Auto-alert Indicator Lights. • Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference. • One touch cleaning: reduces labor costs and saves time and simplifies cleaning process. • Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations. • Head only ice maker: requires a separate storage bin to collect the ice produced. • Space saving top air discharge: no need of side clearance. • XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.			
 NW 307 Dice 10 g W 22 x D 22 x H 22 mm  NW H 307 Half Dice 6 g W 10 x D 22 x H 28 mm	CONDENSING SYSTEM Air cooled	RECOMMENDED BINS			
	REFRIGERANT GAS R290	Head	Bins	kg	
		NW 307	✓	SB193	129
			✓	SB322	168
			CBT30EMCD	SB393	181
	CBT30EMCD	SB530	243		
	VOLTAGE V/Hz/ph 230/50/1	LEGEND: ✓ : Perfect combination between ice maker and bin ● : Ice chute cut-out performed upon installation CBTxxxxxxxx : need additional bin top			
OPERATING REQUIREMENTS					
	Minimum	Maximum			
Air temperature	10	40			
Water temperature	5	35			
Water pressure	1 bar (14 psi)	5 bar (70 psi)			
Electrical voltage	-10%	+10%			

Modular Ice Machine 190 kg

Modular Ice Machine 190 kg

Technical drawings of the Sanyo DWR-10000 refrigerator, showing dimensions in millimeters (mm).

Front View: Overall width 559.8 mm, depth 504 mm, height 661.2 mm. The top panel is 51.8 mm high. The control panel is on the right side.

Side View: Overall width 609.9 mm, depth 100 mm, height 274.5 mm.

Top View: Shows the internal layout of the refrigerator, including the freezer and refrigerator compartments. The overall width is 559.8 mm and the depth is 504 mm.

AIR FLOW: A diagram showing the air flow pattern within the refrigerator, with arrows indicating the direction of air circulation.

UNIT OF MEASUREMENT: mm

Legend:

1. CORD SET
2. 3/4" GAS WATER INLET
3. 13/16" OD - WATER OUTLET
4. AIR INLET / AIR FILTER
5. 3/4" GAS-WATER OUTLET
6. 3/4" GAS-WATER INLET

Internal View (Right): Shows the internal components of the refrigerator, including the compressor, condenser coils, and evaporator. The overall width is 559.8 mm and the depth is 504 mm.

Internal View (Left): Shows the internal components of the refrigerator, including the compressor, condenser coils, and evaporator. The overall width is 559.8 mm and the depth is 504 mm.

ICE DROP AREA: A diagram showing the ice drop area, with dimensions 427.5 mm, 117.5 mm, 6.4 mm, and 335 mm.

UNIT DATA			SHIPPING DATA					(*) Data refer to 32°C Amb. / 21°C Water temperature conditions			
Size (W x D x H)		560 x 610 x 609 mm	Carton (W x D x H)		620 x 680 x 800 mm						
Net weight		54 kg	Weight		63 kg						
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
NWH 307 AS	230/50/1	160	164	118	16.8	19.8	8.1	910	2941	3 x 1.5	16
NW 307 AS	230/50/1	190	175	120	15.9	19.0	8.3	910	2941	3 x 1.5	16

NW 457 EcoX XSafe


Modular Ice Machine 216 kg

		FEATURES • Vertical Cube System. • T304 Stainless Steel Panels. • Auto-alert Indicator Lights. • Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference. • One touch cleaning: reduces labor costs and saves time and simplifies cleaning process. • Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations. • Stackable: add flexibility! • Head only ice maker: requires a separate storage bin to collect the ice produced. • XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.					
 NW 457 Dice 10 g W 22 x D 22 x H 22 mm  NW H 457 Half Dice 6 g W 10 x D 22 x H 28 mm	CONDENSING SYSTEM	RECOMMENDED BINS					
	Air cooled	Head	Bins		kg		
		NW 457	✓	SB393	181		
			✓	SB530	243		
		CBT48EAMCD CBT48FMCD	SB948	406			
	REFRIGERANT GAS						
	R290						
	VOLTAGE V/Hz/ph						
	230/50/1						
LEGEND: ✓ : Perfect combination between ice maker and bin ● : Ice chute cut-out performed upon installation CBTxxxxxxxx : need additional bin top							
OPERATING REQUIREMENTS							
	Minimum		Maximum				
Air temperature	10		40				
Water temperature	5		35				
Water pressure	1 bar (14 psi)		5 bar (70 psi)				
Electrical voltage	-10%		+10%				

Modular Ice Machine 216 kg

NW 457 EcoX XSafe

Modular Ice Machine 216 kg

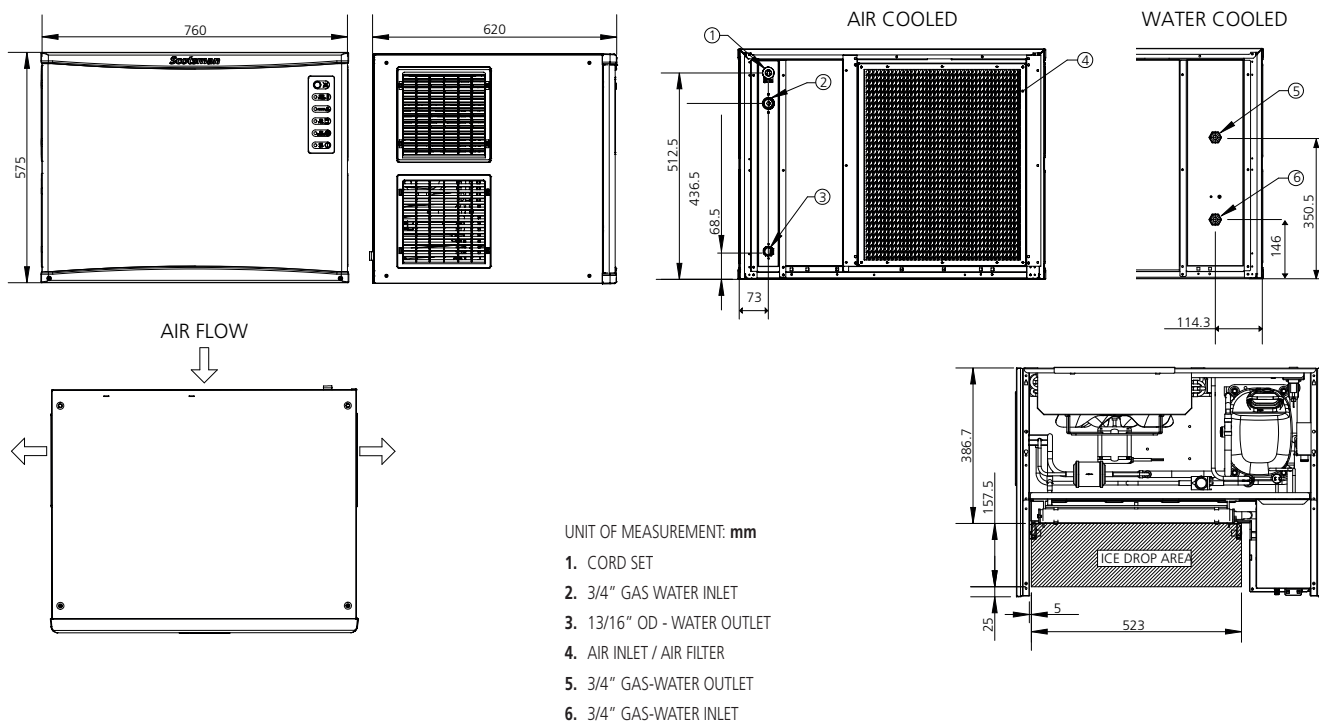

UNIT DATA				SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions			
Size (W x D x H)		760 x 620 x 575 mm		Carton (W x D x H)		830 x 690 x 720 mm					
Net weight		73 kg		Weight		87 kg					
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
NWH 457 AS	230/50/1	216	208	146	14.1	20.6	10.1	960	2941	3 x 1.5	16
NW 457 AS	230/50/1	216	204	157	12.8	20.1	11.5	960	2941	3 x 1.5	16

NW 507 EcoX XSafe


Modular Ice Machine 210 kg

		FEATURES • Vertical Cube System. • T304 Stainless Steel Panels. • Auto-alert Indicator Lights. • Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference. • One touch cleaning: reduces labor costs and saves time and simplifies cleaning process. • Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations. • Head only ice maker: requires a separate storage bin to collect the ice produced. • Space saving top air discharge: no need of side clearance. • XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.			
 NW 507 Dice 10 g W 22 x D 22 x H 22 mm  NW H 507 Half Dice 6 g W 10 x D 22 x H 28 mm	CONDENSING SYSTEM	RECOMMENDED BINS			
	Air cooled	Head	Bins		kg
		NW 507	✓	SB193	129
			✓	SB322	168
			CBT30EMCD	SB393	181
CBT30EMCD	SB530		243		
REFRIGERANT GAS					
R290					
VOLTAGE V/Hz/ph					
230/50/1					
LEGEND: ✓ : Perfect combination between ice maker and bin ● : Ice chute cut-out performed upon installation CBTxxxxxxxx : need additional bin top					
OPERATING REQUIREMENTS					
	Minimum		Maximum		
Air temperature	10		40		
Water temperature	5		35		
Water pressure	1 bar (14 psi)		5 bar (70 psi)		
Electrical voltage	-10%		+10%		

Modular Ice Machine 210 kg

NW 507 EcoX XSafe

Modular Ice Machine 210 kg

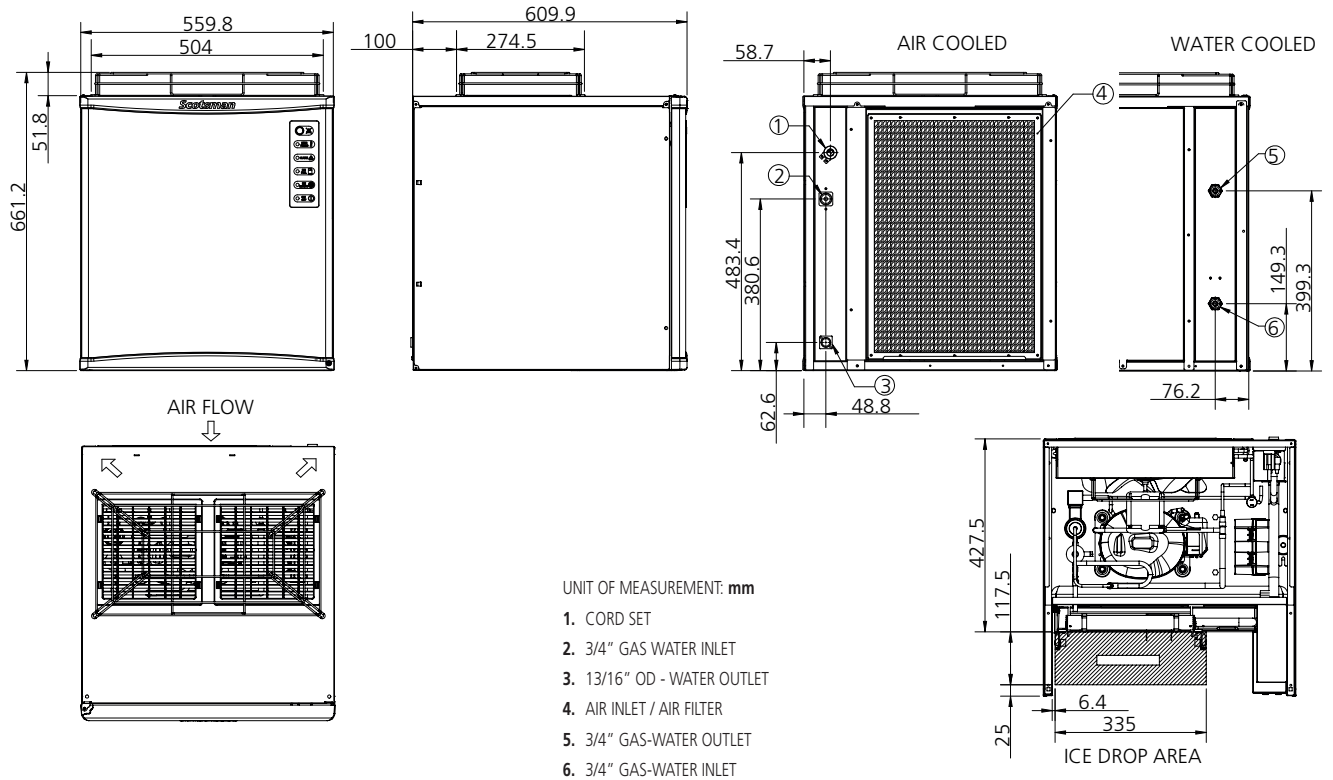

UNIT DATA				SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions			
Size (W x D x H)		560 x 610 x 609 mm		Carton (W x D x H)		620 x 680 x 800 mm					
Net weight		67 kg		Weight		77 kg					
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
NWH 507 AS	230/50/1	201	192	141	14.3	20.2	10.0	1210	2941	3 x 1.5	16
NW 507 AS	230/50/1	210	199	145	14.5	21.1	10.7	1210	2941	3 x 1.5	16

NW 607 EcoX

Modular Ice Machine up to 280 kg

	FEATURES • Vertical Cube System. • T304 Stainless Steel Panels. • Auto-alert Indicator Lights. • Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference. • One touch cleaning: reduces labor costs and saves time and simplifies cleaning process. • Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations. • Stackable: add flexibility! • Head only ice maker: requires a separate storage bin to collect the ice produced.				
 NW 607 Dice 10 g L 22 x P 22 x H 22 mm  NW H 607 Half Dice 6 g L 10 x P 22 x H 28 mm  NW L 607 Large Dice 15 g L 28 x P 22 x H 28 mm	CONDENSING SYSTEM	RECOMMENDED BINS			
	Air cooled	Head	Bins		kg
		NW 607		SB393	181
				SB530	243
		CBT48EAMCD	SB948	406	
REFRIGERANT GAS	LEGEND: : Perfect combination between ice maker and bin : Ice chute cut-out performed upon installation CBTxxxxxxxx : need additional bin top				
VOLTAGE V/Hz/ph					
	230/50/1				
	OPERATING REQUIREMENTS				
		Minimum	Maximum		
	Air temperature	10°C	43°C		
	Water temperature	5°C	38°C		
	Water pressure	1 bar (14 psi)	5 bar (70 psi)		
	Electrical voltage	-10%	+10%		


Modular Ice Machine up to 280 kg

NW 607

EASY

EcoX

Modular Ice Machine up to 280 kg

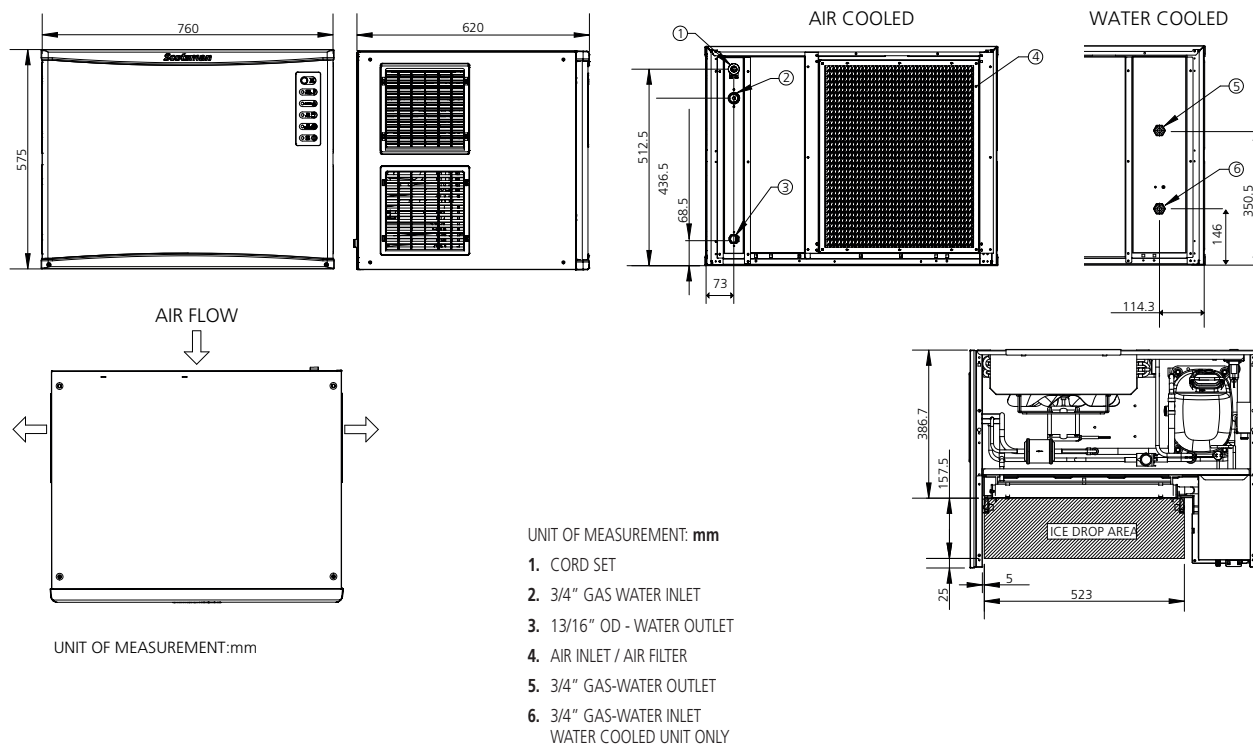

UNIT DATA

Size (W x D x H)	760 x 620 x 575 mm
Net weight	76 kg

SHIPPING DATA

Carton (W x D x H)	830 x 690 x 740 mm
Weight	89 kg

Version	Voltage	Compressor		Circuit wires		Max. fuse size
		Btu/h	W	No.	Ømm ²	A
NW 607 AS	230/50/1	9682	2839	3	1.5	16
NW H 607 AS	230/50/1	9682	2839	3	1.5	16
NW L 607 AS	230/50/1	9682	2839	3	1.5	16

			24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
NW 607 AS	Air	230/50/1	280	270	210	10.6	22.2	13.9	1050
NW H 607 AS	Air	230/50/1	280	270	210	10.6	22.2	13.9	1050
NW L 607 AS	Air	230/50/1	280	270	190	11.0	20.9	13.6	1050

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

NW 1008 XSafe


Modular Ice Machine 485 kg

		FEATURES • Vertical Cube System. • T304 Stainless Steel Panels. • Auto-alert Indicator Lights. • Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference. • One touch cleaning: reduces labor costs and saves time and simplifies cleaning process. • Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations. • Head only ice maker: requires a separate storage bin to collect the ice produced. • XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.				
 NW 1008 Dice 10 g W 22 x D 22 x H 22 mm  NW H 1008 Half Dice 6 g W 10 x D 22 x H 28 mm  NW L 1008 Large Dice 15 g W 28 x D 22 x H 28 mm	CONDENSING SYSTEM Air cooled Remote condenser Water cooled		RECOMMENDED BINS			
	REFRIGERANT GAS R404A R452A		Head	Bins		kg
			NW 1008	✓	SB393	181
				✓	SB530	243
				CBT48EAMCD CBT48FMCD	SB948	406
				CBT52EAMCD	SB1025	478
				●	UBH1100	553
	●	UBH1600	812			
	VOLTAGE V/Hz/ph 230/50/1 230/60/1		LEGEND: ✓ : Perfect combination between ice maker and bin ● : Ice chute cut-out performed upon installation CBTxxxxxxxx : need additional bin top			
	OPERATING REQUIREMENTS					
		Minimum	Maximum			
Air temperature		10	40			
Water temperature		5	35			
Water pressure		1 bar (14 psi)	5 bar (70 psi)			
Electrical voltage		-10%	+10%			

Modular Ice Machine 485 kg

NW 1008 *XSafe*

Modular Ice Machine 485 kg

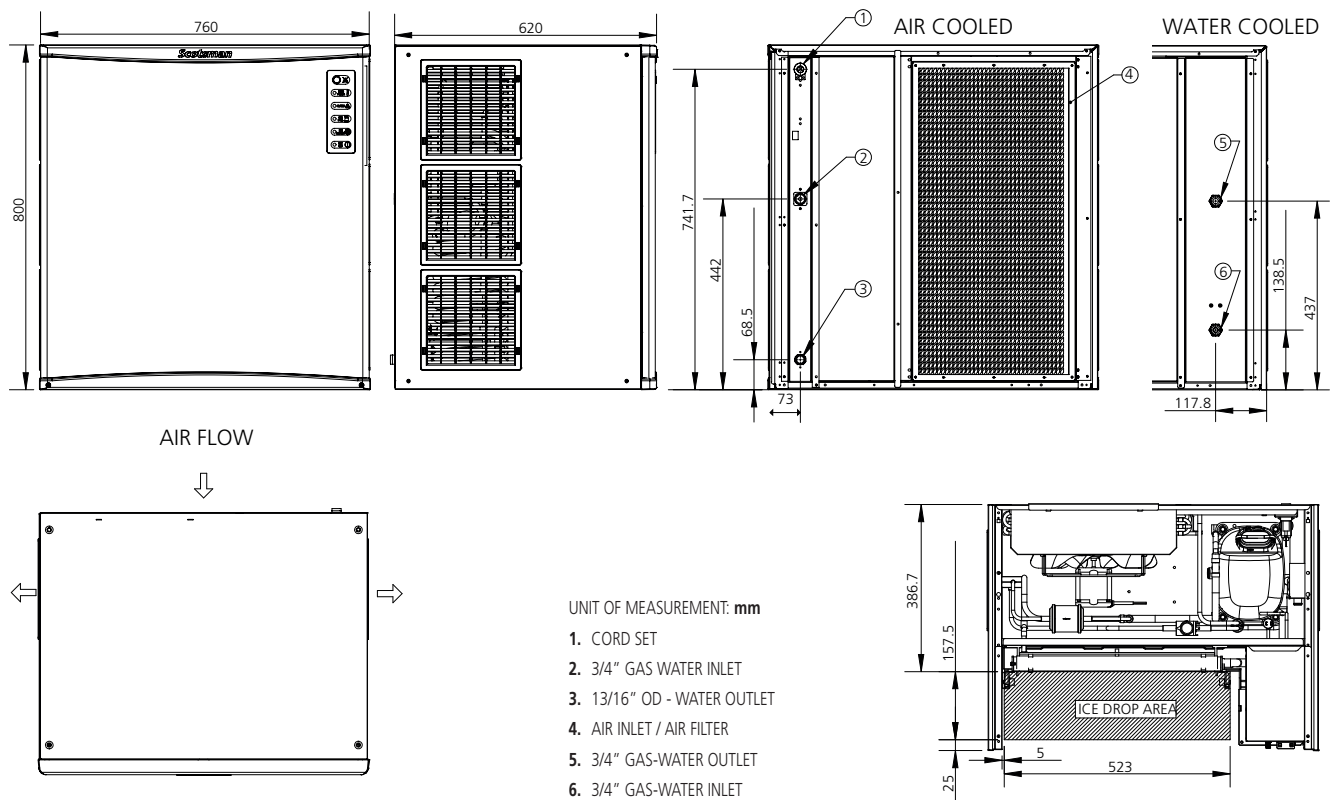

UNIT DATA				SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions			
Size (W x D x H)		760 x 620 x 800 mm		Carton (W x D x H)		830 x 690 x 990 mm					
Net weight		105 kg		Weight		122 kg					
Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
NWH 1008 AS	230/50/1	485	456	380	13.2	50.3	22.3	2500	7300	3 x 2.5	30
NWH 1008 ASR	230/50/1	475	470	420	14.1	59.2	25.5	2500	7300	3 x 2.5	30
NWH 1008 WS	230/50/1	460	460	410	12.1	49.7	173.2	2500	7300	3 x 2.5	30
NWL 1008 AS	230/50/1	485	456	380	13.2	50.3	22.3	2500	7300	3 x 2.5	30
NWL 1008 ASR	230/50/1	465	470	420	12.8	53.7	25.1	2500	7300	3 x 2.5	30
NWL 1008 WS	230/50/1	460	450	400	12.1	48.5	169.0	2500	7300	3 x 2.5	30
NW 1008 AS	230/50/1	485	456	380	13.1	49.9	22.3	2500	7300	3 x 2.5	30
NW 1008 ASR	230/50/1	470	470	420	13.1	55.2	24.7	2500	7300	3 x 2.5	30
NW 1008 WS	230/50/1	460	450	410	12.1	49.7	173.2	2500	7300	3 x 2.5	30

NW 1408 XSafe


Modular Ice Machine 640 kg

		FEATURES • Vertical Cube System. • T304 Stainless Steel Panels. • Auto-alert Indicator Lights. • Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference. • One touch cleaning: reduces labor costs and saves time and simplifies cleaning process. • Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations. • Head only ice maker: requires a separate storage bin to collect the ice produced. • XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.			
 NW 1408 Dice 10 g W 22 x D 22 x H 22 mm  NW H 1408 Half Dice 6 g W 10 x D 22 x H 28 mm  NW L 1408 Large Dice 15 g W 28 x D 22 x H 28 mm	CONDENSING SYSTEM Air cooled Remote condenser Water cooled	RECOMMENDED BINS			
	REFRIGERANT GAS R404A R452A	Head	Bins		kg
		NW 1408		SB530	243
			CBT48EAMCD CBT48FMCD	SB948	406
			CBT52EAMCD	SB1025	478
				UBH1100	553
			UBH1600	812	
VOLTAGE V/Hz/ph 230/50/1 230/60/1	LEGEND:  : Perfect combination between ice maker and bin  : Ice chute cut-out performed upon installation CBTxxxxxxxx : need additional bin top				
OPERATING REQUIREMENTS					
	Minimum	Maximum			
Air temperature	10	40			
Water temperature	5	35			
Water pressure	1 bar (14 psi)	5 bar (70 psi)			
Electrical voltage	-10%	+10%			

Modular Ice Machine 640 kg

NW 1408 *xSafe*

Modular Ice Machine 640 kg

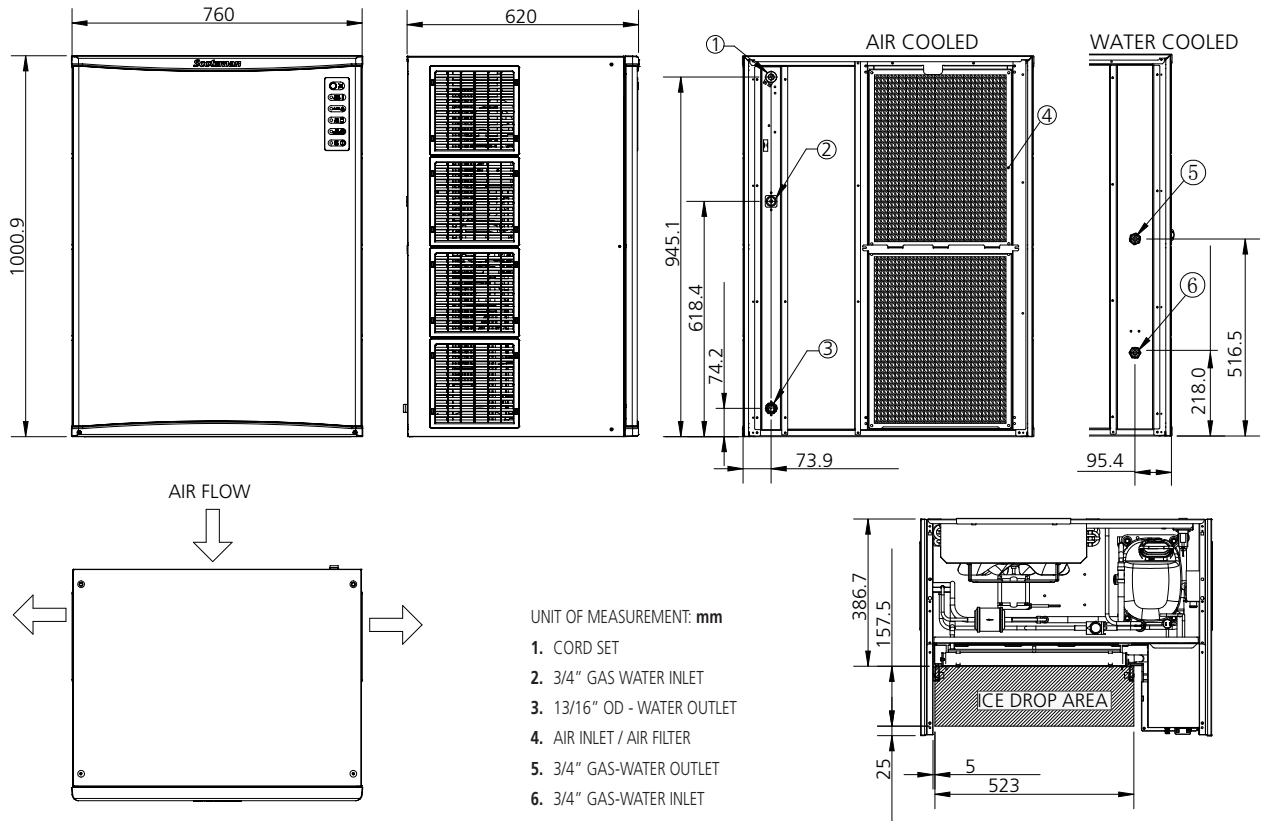

UNIT DATA				SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions			
Size (W x D x H)		765 x 610 x 1000 mm		Carton (W x D x H)		830 x 690 x 1160 mm					
Net weight		130 kg		Weight		145 kg					
Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
NWH 1408 AS	230/50/1	660	650	530	10.8	57.2	31.1	3365	10500	3 x 2.5	30
NWH 1408 ASR	230/50/1	680	660	500	10.8	54.0	29.8	3365	10500	3 x 2.5	30
NWH 1408 WS	230/50/1	660	660	590	9.3	54.6	292.6	3365	10500	3 x 2.5	30
NWL 1408 AS	230/50/1	620	600	510	10.4	52.8	27.6	3365	10500	3 x 2.5	30
NWL 1408 WS	230/50/1	620	630	560	8.8	49.4	282.8	3365	10500	3 x 2.5	30
NW 1408 AS	230/50/1	640	630	500	11.2	56.2	26.6	3365	10500	3 x 2.5	30
NW 1408 WS	230/50/1	660	650	580	9.0	52.4	261.0	3365	10500	3 x 2.5	30
NWH 1408 AS	230/60/1	660	641	480	11.2	54.0	32.6	3000	9442	3 x 2.5	30
NWH 1408 ASR	230/60/1	630	580	480	11.7	56.1	25.5	3000	9442	3 x 2.5	30

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

По вопросам продаж и поддержки обращайтесь:

эл.почта: hib@nt-rt.ru || сайт: <https://hibu.nt-rt.ru/>