

Льдогенераторы хлопьевидного льда MXF

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: hib@nt-rt.ru || сайт: <https://hibu.nt-rt.ru/>

MXF 327

EcoX

XSafe


Modular Ice Machine 133 kg

		FEATURES • Top Materials: AISI 304 Stainless steel and new removable grid • Core Ice System: Stable evaporator system (Axial load). • New Core Evaporator: Highly balanced auger (double fly system). • New Gearmotor: Evaporator strability improved and noise free. • Innovative Ice Breaker: Very dry flake ice - 12% of water contents. • Durable Operations: High efficiency and better performance. • Easy to Clean: Facilitated cleaning process and XSafe standard. • New High-tech Water Sump with easy regulation system. • New ice level sensor: for seamless operations. • New Display: Touch & Smart. • XWave: New App with improved electronics and programming.							
 MXF 327 Superflake ice Residual water content 12%	CONDENSING SYSTEM Air cooled	RECOMMENDED BINS <table><tr><td>Head</td><td>Bins</td><td>kg</td></tr><tr><td>MXF 327</td><td>SB193</td><td>129</td></tr></table>		Head	Bins	kg	MXF 327	SB193	129
	Head	Bins	kg						
	MXF 327	SB193	129						
	REFRIGERANT GAS R290								
VOLTAGE V/Hz/ph 230/50/1									
	OPERATING REQUIREMENTS								
		Minimum	Maximum						
	Air temperature	10	43						
	Water temperature	5	38						
	Water pressure	1 bar (14 psi)	5 bar (70 psi)						
	Electrical voltage	-10%	+10%						

Modular Ice Machine 133 kg

MXF 327 EcoX XSafe

Modular Ice Machine 133 kg

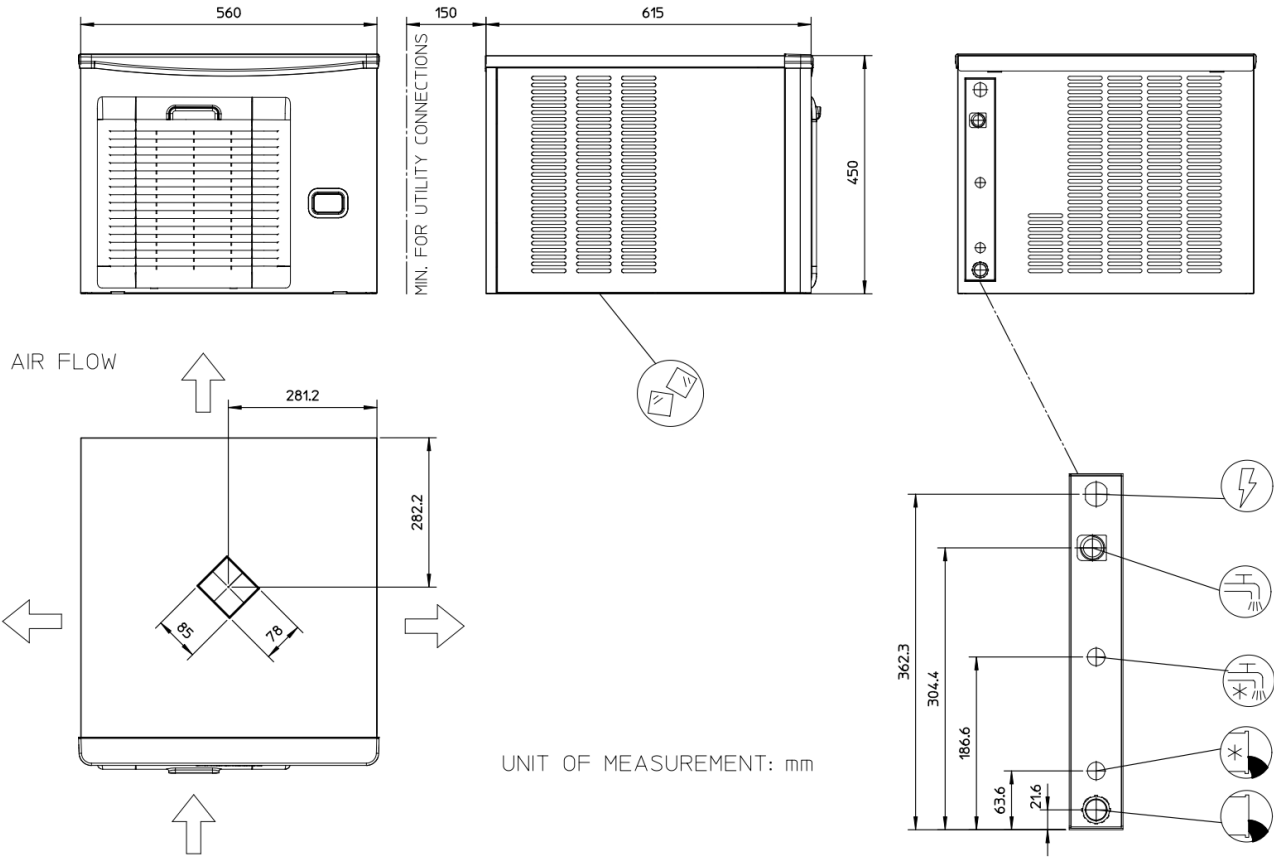

UNIT DATA					SHIPPING DATA						
Size (W x D x H)		560 x 615 x 450 mm			Carton (W x D x H)		625 x 690 x 625 mm				
Net weight		44 kg			Weight		54 kg				
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
MXF 327 AS OX	230/50/1	133	123	90	11.8	10.6	3.9	470	520	3 x 1.5	10
MXF 327 WS OX	230/50/1	125	120	100	10	10	43	430	430	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

MXF 427

EcoX

XSafe


Modular Ice Machine 220 kg

	FEATURES • Top Materials: AISI 304 Stainless steel and new removable grid • Core Ice System: Stable evaporator system (Axial load). • New Core Evaporator: Highly balanced auger (double fly system). • New Gearmotor: Evaporator strability improved and noise free. • Innovative Ice Breaker: Very dry flake ice - 12% of water contents. • Durable Operations: High efficiency and better performance. • Easy to Clean: Facilitated cleaning process and XSafe standard. • New High-tech Water Sump with easy regulation system. • New ice level sensor: for seamless operations. • New Display: Touch & Smart. • XWave: New App with improved electronics and programming.			
 MXF 427 Superflake ice Residual water content 12%	CONDENSING SYSTEM Air cooled	RECOMMENDED BINS		
	REFRIGERANT GAS R290	Head	Bins	kg
		MXF 427	SB322	168
	VOLTAGE V/Hz/ph 230/50/1			
		OPERATING REQUIREMENTS		
			Minimum	Maximum
		Air temperature	10	43
		Water temperature	5	38
		Water pressure	1 bar (14 psi)	5 bar (70 psi)
		Electrical voltage	-10%	+10%

Modular Ice Machine 220 kg

MXF 427 EcoX XSafe

Modular Ice Machine 220 kg

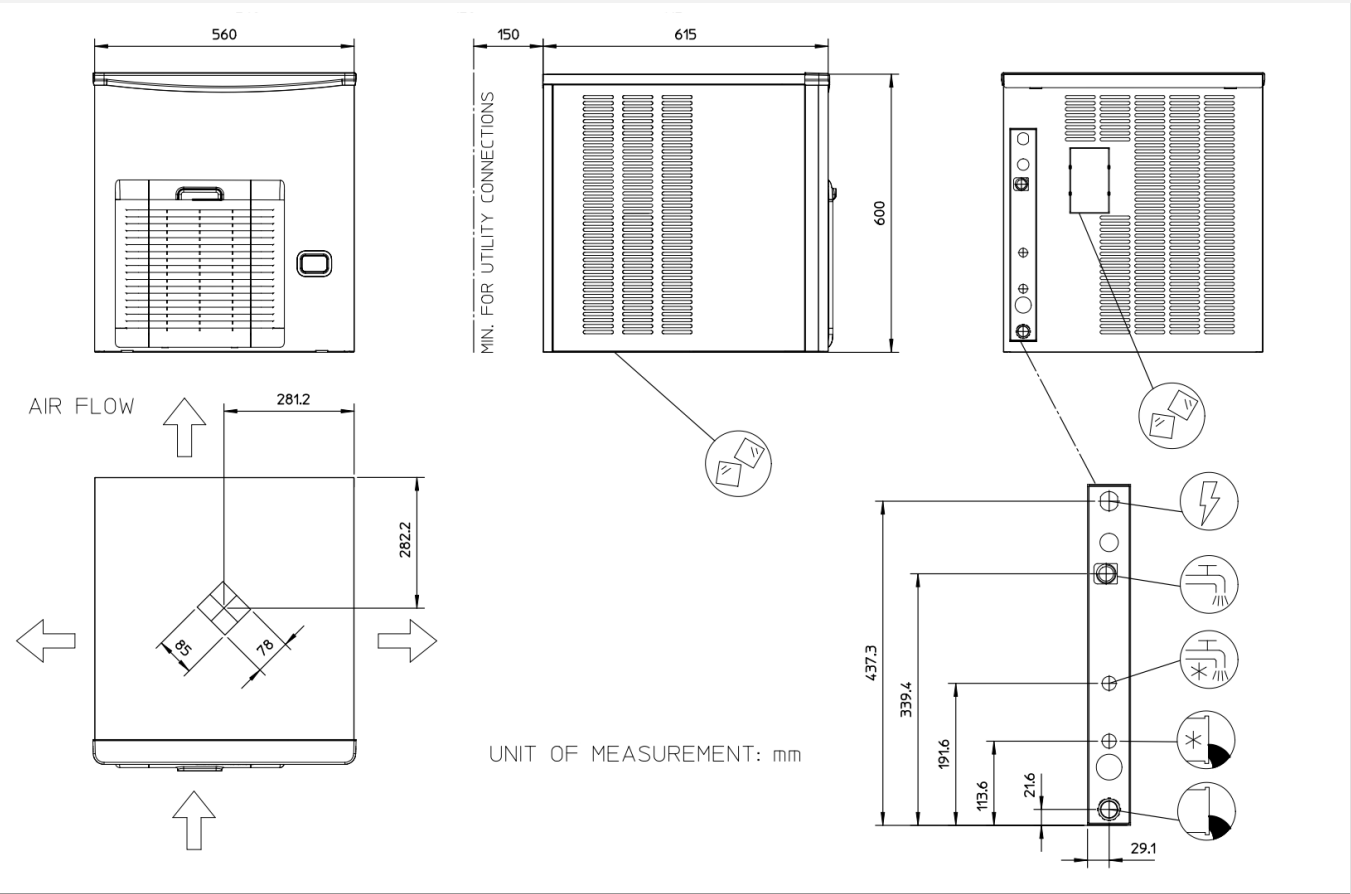

UNIT DATA					SHIPPING DATA						
Size (W x D x H)		560 x 615 x 600 mm			Carton (W x D x H)		625 x 690 x 775 mm				
Net weight		51 kg			Weight		61 kg				
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
MXF 427 AS OX	230/50/1	215	187	170	9.6	16.3	7.9	750	1900	3 x 1.5	10
MXF 427 WS OX	230/50/1	240	230	200	7.5	14.9	173	630	1197	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

MXF 627

EcoX

XSafe


Modular Ice Machine 300 kg

	FEATURES • Top Materials: AISI 304 Stainless steel and new removable grid • Core Ice System: Stable evaporator system (Axial load). • New Core Evaporator: Highly balanced auger (double fly system). • New Gearmotor: Evaporator strability improved and noise free. • Innovative Ice Breaker: Very dry flake ice - 12% of water contents. • Durable Operations: High efficiency and better performance. • Easy to Clean: Facilitated cleaning process and XSafe standard. • New High-tech Water Sump with easy regulation system. • New ice level sensor: for seamless operations. • New Display: Touch & Smart. • XWave: New App with improved electronics and programming.			
 MXF 627 Superflake ice Residual water content 12%	CONDENSING SYSTEM Air cooled Water cooled	RECOMMENDED BINS		
		Head	Bins	kg
	REFRIGERANT GAS R290	MXF 627	SB322	168
				
		VOLTAGE V/Hz/ph 230/50/1		
OPERATING REQUIREMENTS				
		Minimum	Maximum	
Air temperature		10	43	
Water temperature		5	38	
Water pressure		1 bar (14 psi)	5 bar (70 psi)	
Electrical voltage	-10%	+10%		

Modular Ice Machine 300 kg

MXF 627 EcoX XSafe

Modular Ice Machine 300 kg

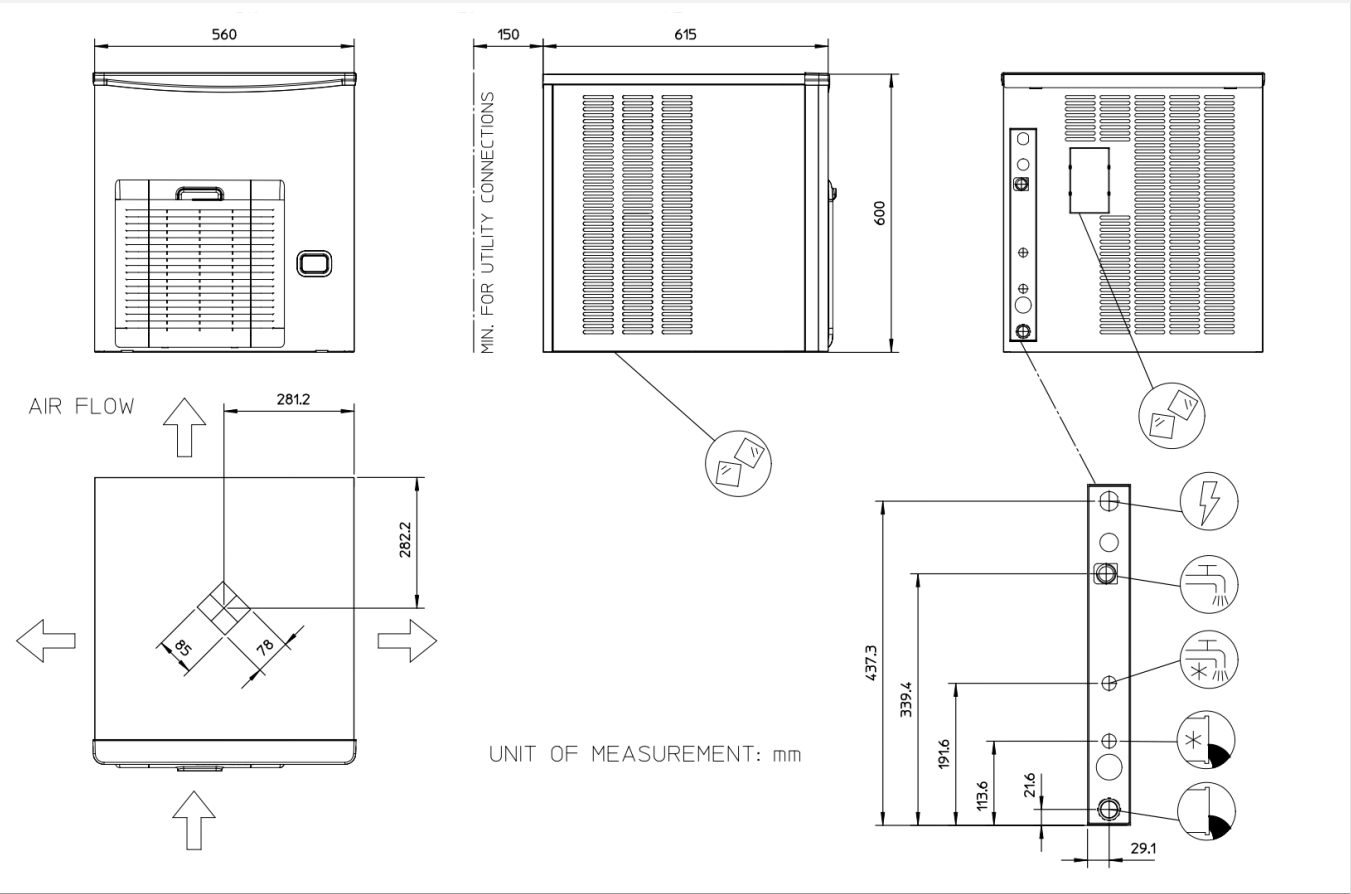

UNIT DATA					SHIPPING DATA						
Size (W x D x H)		560 x 615 x 600 mm			Carton (W x D x H)		625 x 690 x 775 mm				
Net weight		51 kg			Weight		61 kg				
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
MXF 627 AS OX	230/50/1	300	270	230	10.7	24.7	9	939	1080	3 x 1.5	10
MXF 627 WS OX	230/50/1	280	265	230	9,3	21,3	82,5	900	932	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

MXF 1027 EcoX XSafe


Modular Ice Machine 500 kg

	FEATURES • Top Materials: AISI 304 Stainless steel and new removable grid • Core Ice System: Stable evaporator system (Axial load). • New Core Evaporator: Highly balanced auger (double fly system). • New Gearmotor: Evaporator strability improved and noise free. • Innovative Ice Breaker: Very dry flake ice - 12% of water contents. • Durable Operations: High efficiency and better performance. • Easy to Clean: Facilitated cleaning process and XSafe standard. • New High-tech Water Sump with easy regulation system. • New ice level sensor: for seamless operations. • New Display: Touch & Smart. • XWave: New App with improved electronics and programming.			
 MXF 1027 Superflake ice Residual water content 12%	CONDENSING SYSTEM Air cooled Water cooled	RECOMMENDED BINS		
		Head	Bins	kg
	REFRIGERANT GAS R290	MXF 1027	SB530	243
				
	VOLTAGE V/Hz/ph 230/50/1			
	OPERATING REQUIREMENTS			
		Minimum	Maximum	
	Air temperature	10	43	
	Water temperature	5	38	
	Water pressure	1 bar (14 psi)	5 bar (70 psi)	
	Electrical voltage	-10%	+10%	

Modular Ice Machine 500 kg

MXF 1027 XSafe

Modular Ice Machine 500 kg

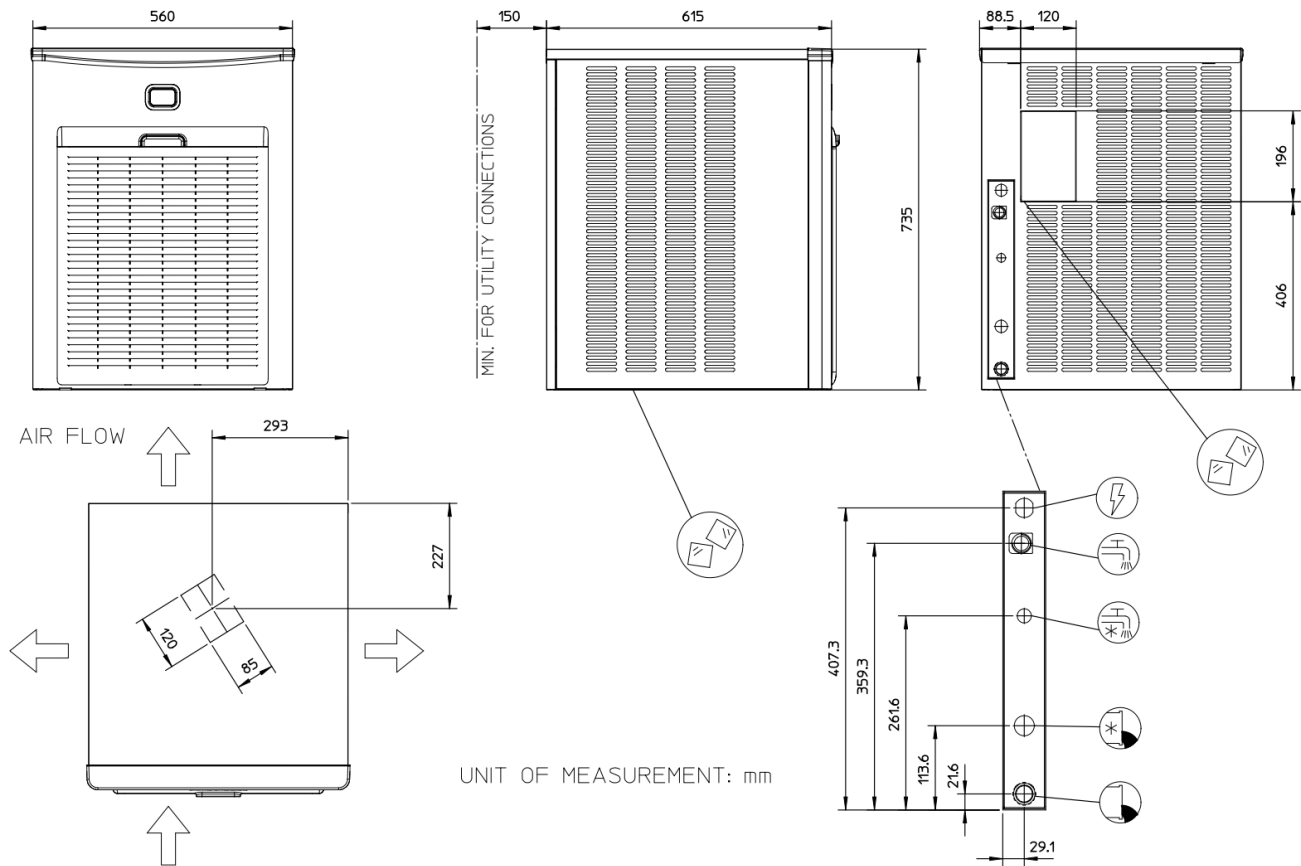

UNIT DATA					SHIPPING DATA						
Size (W x D x H)		560 x 615 x 735 mm			Carton (W x D x H)		625 x 690 x 910 mm				
Net weight		80 kg			Weight		90 kg				
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
MXF 1027 AS OX	230/50/1	500	430	314	11.3	35.5	13.1	1570	1500	3 x 1.5	10
MXF 1027 WS OX	230/50/1	500	480	395	7,7	30,3	189	1400	1500	3 x 1,5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

MXF 1237 XSafe


Modular Ice Machine 560 kg

		FEATURES • Top Materials: AISI 304 Stainless steel and new removable grid • Core Ice System: Stable evaporator system (Axial load). • New Core Evaporator: Highly balanced auger (double fly system). • New Gearmotor: Evaporator strability improved and noise free. • Innovative Ice Breaker: Very dry flake ice - 12% of water contents. • Durable Operations: High efficiency and better performance. • Easy to Clean: Facilitated cleaning process and XSafe standard. • New High-tech Water Sump with easy regulation system. • New ice level sensor: for seamless operations. • New Display: Touch & Smart. • XWave: New App with improved electronics and programming.		
 MXF 1237 Superflake ice Residual water content 12%	CONDENSING SYSTEM Air cooled	RECOMMENDED BINS		
	REFRIGERANT GAS R290	Head	Bins	kg
		MXF 1237	SB530	243
				
	VOLTAGE V/Hz/ph 230/50/1			
		OPERATING REQUIREMENTS		
			Minimum	Maximum
		Air temperature	10	43
		Water temperature	5	38
		Water pressure	1 bar (14 psi)	5 bar (70 psi)
		Electrical voltage	-10%	+10%

Modular Ice Machine 560 kg

MXF 1237 *XSafe*

Modular Ice Machine 560 kg

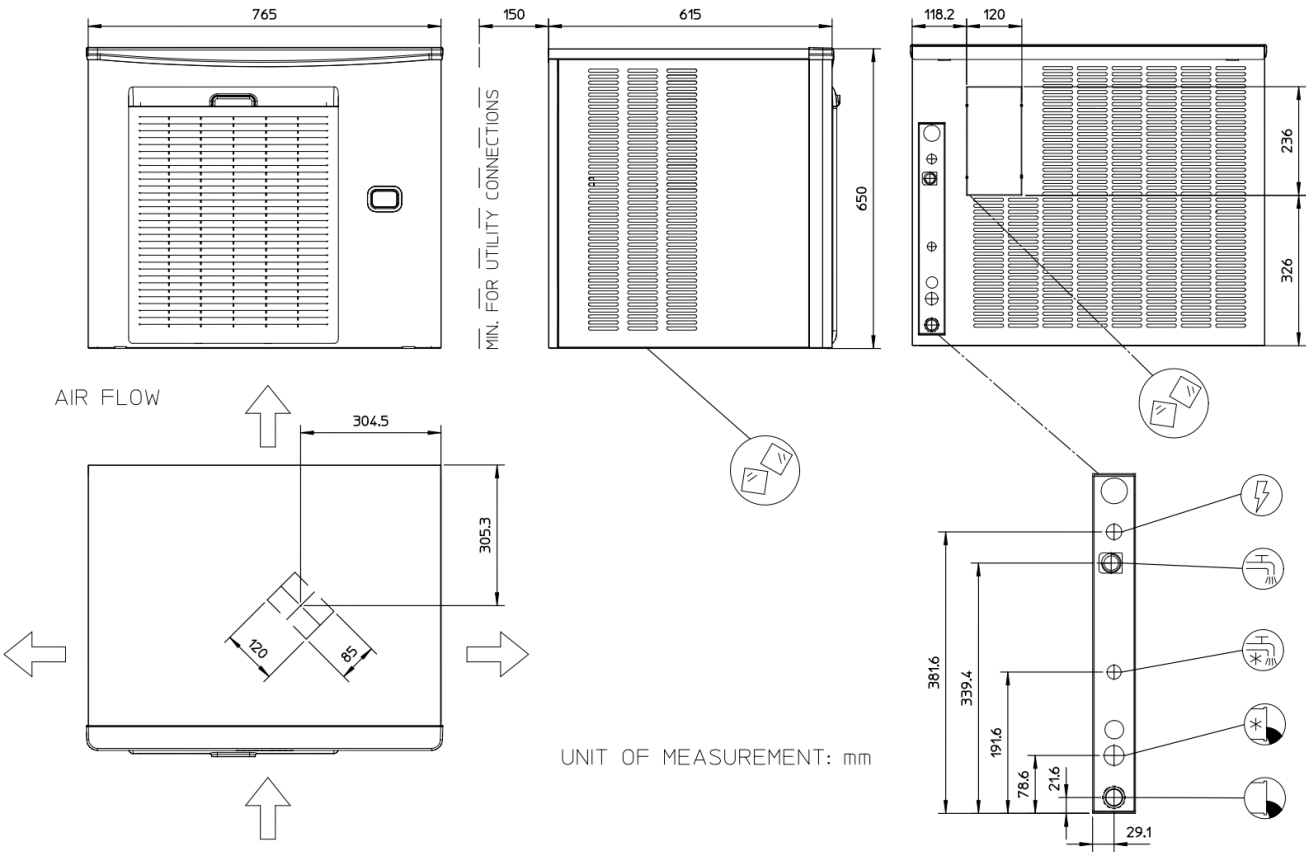

UNIT DATA					SHIPPING DATA						
Size (W x D x H)		765 x 615 x 650 mm			Carton (W x D x H)		830 x 690 x 825 mm				
Net weight		97 kg			Weight		107 kg				
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
MXF 1237 AS OX	230/50/1	560	500	380	12.5	45	15.8	2025	1870	3 x 1.5	16

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions



По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: hib@nt-rt.ru || сайт: <https://hibu.nt-rt.ru/>