

Льдогенераторы ВН

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: hib@nt-rt.ru || сайт: <https://hibu.nt-rt.ru/>

BAR LINE - Self Contained Machine Bistrot Cube

BAR LINE

ICE - MACHINES



B 2006 AS/WS

Bar Line Equipment range is the newly released EU made ice makers for Thimble-shaped rounded ice cubes coming from Bar Line.

Built in the Italian manufacturing plant of Frimont Spa, ISO 9001 Certified, these units are built with sturdy, corrosion resistant stainless steel, and feature European made componentry to assure maximum quality and reliability.

Tested one by one, the Bar Line self contained units feature well balanced ratio between production and storage capacity, alongside with reduced outer dimensions that allow for built-in installations.

Front air louvers assure appropriate airflow in critical install requirements. Contemporary, elegant design unites excellent operational features with the reliability obtained through years of successful experience in ice making technology.

Insulated bin door and ice storage bin minimize air condensation and water formation on equipment surfaces.

Electromechanic controls maximise reliability and ease of repair during the entire life of the equipment.

Proudly Made in Italy.

Also available in the self-contained range for "Bistrot" cube: B 2508, B 3008, B 3015, B 4015, B 5022, B 6022, B 7540, B 9040, B 9550

See pertaining literature for more details

B2006

FEATURES:

- ✓ Improved water distribution system alongside with evaporator assembly: a larger number of ice cubes are now produced per each cycle, while the newly designed water distribution spray system provides best evaporator surface coverage and is simple to remove during routine cleaning.
- ✓ Optimized dimensions and production/storage ratios. Easier to fit even under lowest bar counters and in reduced footprint spaces.
- ✓ Front panel installed thermostatic controls for ice cube size and storage bin ice level sensor. Easily accessible, allow for an easy adjustment of the key working parameters of the machine.
- ✓ Bin-door slide rollers for a smooth open-close movement, with door movement rubber, sound dampening, shock absorbers
- ✓ Utilities connection may run through side panel openings, as well as through the base panel, for a reduced depth installation requirement.

BAR LINE - Self Contained Machine Bistrot Cube

BAR LINE

ICE - MACHINES



B 2006

Also available in the self-contained range for "Bistrot" cube: **B 2508, B 3008, B 3015, B 4015, B 5022, B 6022, B 7540, B 9040, B 9550**

See pertaining literature for more details



B 2006 AS / WS

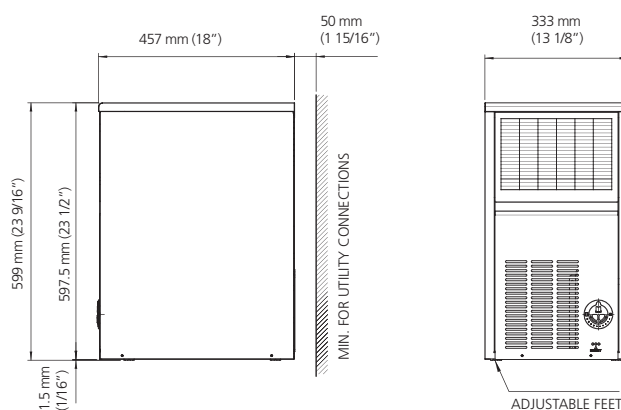
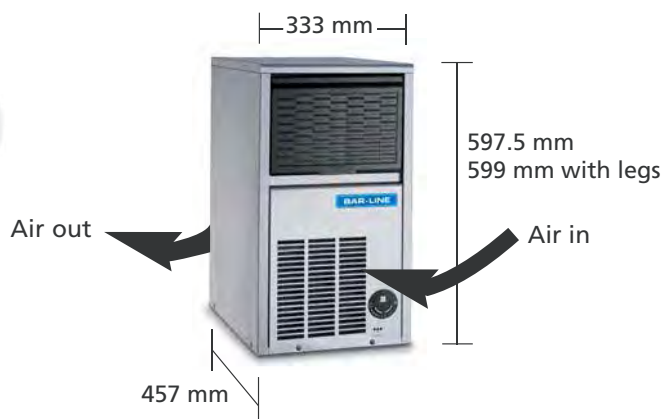


OPERATING LIMITS

Air Temp. Range	10°C - 43°C
Water Temp. Range	5°C - 38°C
Water Pressure	Min. 0.8 bar Max. 5 bar
Electrical Voltage	230V/50Hz/1ph (230V/60Hz/1ph on selected models)

All specifications and performance data are subject to normal manufacturing variances.

All panels are in stainless steel.

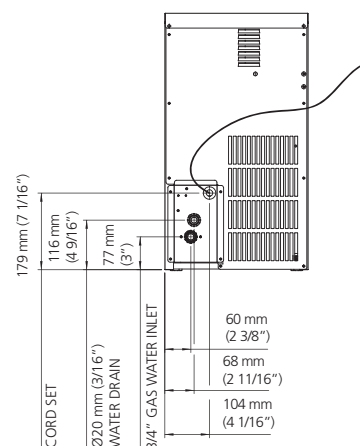

ORDERING AND SPECIFICATION INFORMATION

Model No.	Cond. unit	ICE Production per 24 hrs. at 10°C Air/10°C Water kg	Bin storage kg	Voltage Characteristics	Refrigerant	Water Consumption l/h*	Electric Consumption kWh/24h**	Net Weight kg	Max. Shipping Weight kg
B 2006 AS	Air	20	6	230/50/1	R 134a	3	7	28	33
B 2006 WS	Water	20	6	230/50/1	R 134a	17	5	28	33

*measured at 21°C water

**measured at 32°C air / 21°C water

BH 2006



20 kg Self-contained Ice Machine

Complete Range: BH 2006 - BH 2508 - BH 3008 - BH 3015 - BH 4015 - BH 5022 - BH 6022 - BH 7540 - BH 9050

Technical features

- Stainless steel bodywork - scotch brite
- Vertical pump
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- Refrigerant R290




Internal bin capacity



6 kg of Ice

300 cubes

Type of ice

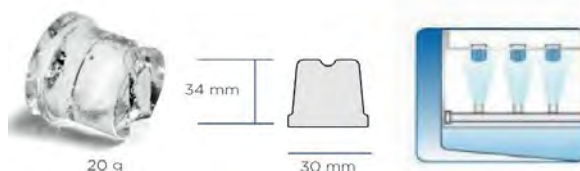

Machine dimensions

Voltage

230/50/1 Standard version

220-240/60/1 Available on demand

Net size WxDxH 333 x 457 x 599 mm

Net weight 28 kg

Shipping size WxDxH 400 x 530 x 690 mm

33 kg

Technology and Certifications




BH 2006



20 kg Self-contained Ice Machine

Complete Range: BH 2006 - BH 2508 - BH 3008 - BH 3015 - BH 4015 - BH 5022 - BH 6022 - BH 7540 - BH 9050

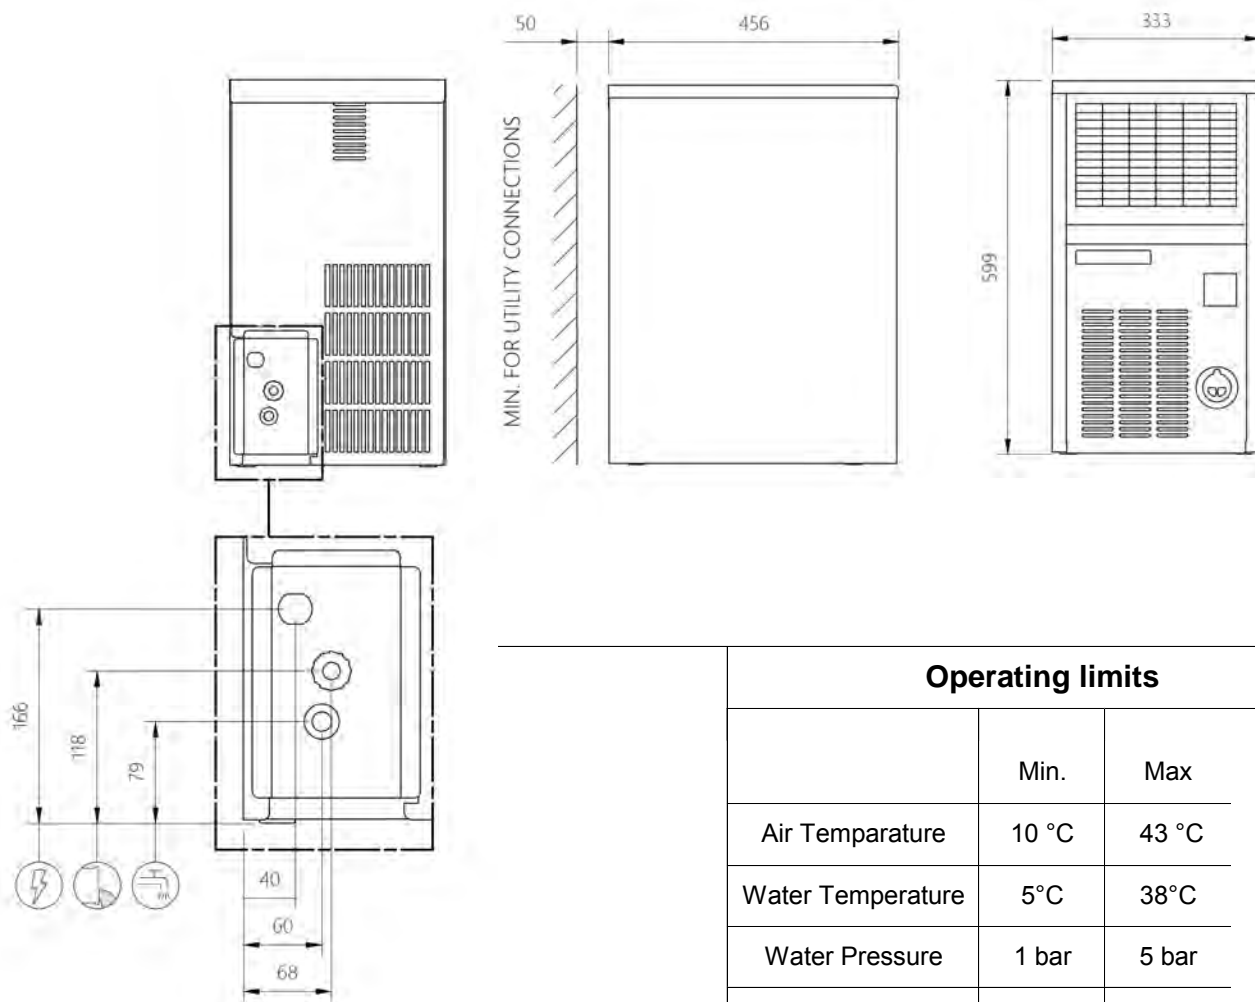

Operating limits

	Min.	Max
Air Temperature	10 °C	43 °C
Water Temperature	5°C	38°C
Water Pressure	1 bar	5 bar
Voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production Kg		Power Input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C	21°C/10°C		Type	Charge Kg		kWh/100kg	kWh/ 24h	Water l/h
BH 2006 A	230/50/1	20	18,5	250	R290	0,075	10	32,3	4,2	3,9

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water

BAR LINE - Self Contained Machine Bistrot Cube

BAR LINE

ICE - MACHINES



B 2508 AS/WS

Bar Line Equipment range is the newly released EU made ice makers for Thimble-shaped rounded ice cubes coming from Bar Line.

Built in the Italian manufacturing plant of Frimont Spa, ISO 9001 Certified, these units are built with sturdy, corrosion resistant stainless steel, and feature European made componentry to assure maximum quality and reliability.

Tested one by one, the Bar Line self contained units feature well balanced ratio between production and storage capacity, alongside with reduced outer dimensions that allow for built-in installations.

Front air louvers assure appropriate airflow in critical install requirements. Contemporary, elegant design unites excellent operational features with the reliability obtained through years of successful experience in ice making technology.

Insulated bin door and ice storage bin minimize air condensation and water formation on equipment surfaces.

Electromechanic controls maximise reliability and ease of repair during the entire life of the equipment.

Proudly Made in Italy.

Also available in the self-contained range for "Bistrot" cube: **B 2006, B 3008, B 3015, B 4015, B 5022, B 6022, B 7540, B 9040, B 9550**

B 2508

See pertaining literature for more details

FEATURES:

- ✓ Improved water distribution system alongside with evaporator assembly: a larger number of ice cubes are now produced per each cycle, while the newly designed water distribution spray system provides best evaporator surface coverage and is simple to remove during routine cleaning.
- ✓ Optimized dimensions and production/storage ratios. Easier to fit even under lowest bar counters and in reduced footprint spaces.
- ✓ Front panel installed thermostatic controls for ice cube size and storage bin ice level sensor. Easily accessible, allow for an easy adjustment of the key working parameters of the machine.
- ✓ Bin-door slide rollers for a smooth open-close movement, with door movement rubber, sound dampening, shock absorbers
- ✓ Utilities connection may run through side panel openings, as well as through the base panel, for a reduced depth installation requirement.

BAR LINE - Self Contained Machine Bistrot Cube

BAR LINE

ICE - MACHINES






B 2508

Also available in the self-contained range for "Bistrot" cube: **B 2006, B 3008, B 3015, B 4015, B 5022, B 6022, B 7540, B 9040, B 9550**

See pertaining literature for more details

B 2508 AS / WS

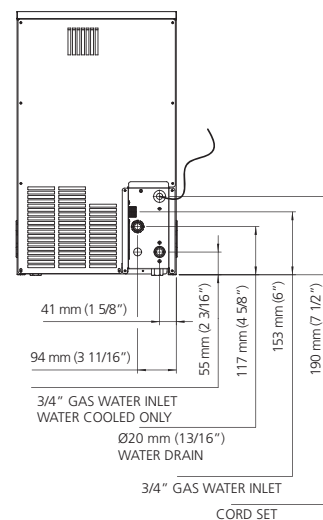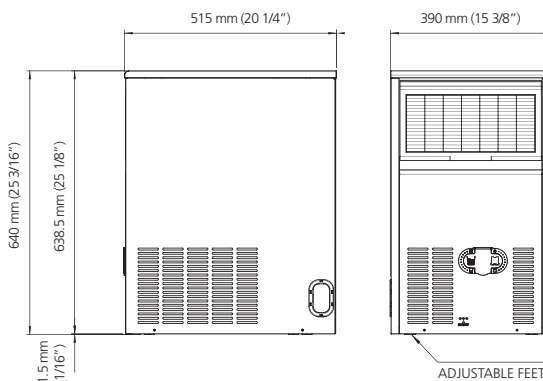

OPERATING LIMITS

Air Temp. Range	10°C - 43°C
Water Temp. Range	5°C - 38°C
Water Pressure	Min. 0.8 bar Max. 5 bar
Electrical Voltage	230V/50Hz/1ph (230V/60Hz/1ph on selected models)

All specifications and performance data are subject to normal manufacturing variances.

All panels are in stainless steel.



ORDERING AND SPECIFICATION INFORMATION

Model No.	Cond. unit	ICE Production per 24 hrs. at 10°C Air/10°C Water kg	Bin storage kg	Voltage Characteristics	Refrigerant	Water Consumption l/h*	Electric Consumption kWh/24h**	Net Weight kg	Max. Shipping Weight kg
B 2508 AS	Air	25	8	230/50/1	R134a	3	7	31	36
B 2508 WS	Water	24	8	230/50/1	R134a	22	6	31	36

*measured at 15°C water

**measured at 32°C air / 21°C water

BH 2508



25 kg Self-contained Ice Machine

Complete Range: BH 2006 - BH 2508 - BH 3008 - BH 3015 - BH 4015 - BH 5022 - BH 6022 - BH 7540 - BH 9050

Technical features

- Stainless steel bodywork - scotch brite
- Vertical pump
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- Refrigerant R290




Internal bin capacity



8 kg of Ice

400 cubes

Type of ice

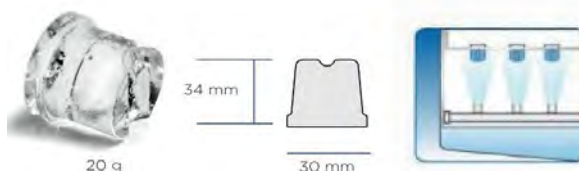

Machine dimensions

Voltage

230/50/1 Standard version

220-240/60/1 Available on demand

Net size WxDxH	670 x 595 x 981 mm
Net weight	63 kg
Shipping size WxDxH	740 x 670 x 1080 mm
Shipping weight	74 kg

Technology and Certifications




BH 2508



25 kg Self-contained Ice Machine

Complete Range: BH 2006 - BH 2508 - BH 3008 - BH 3015 - BH 4015 - BH 5022 - BH 6022 - BH 7540 - BH 9050

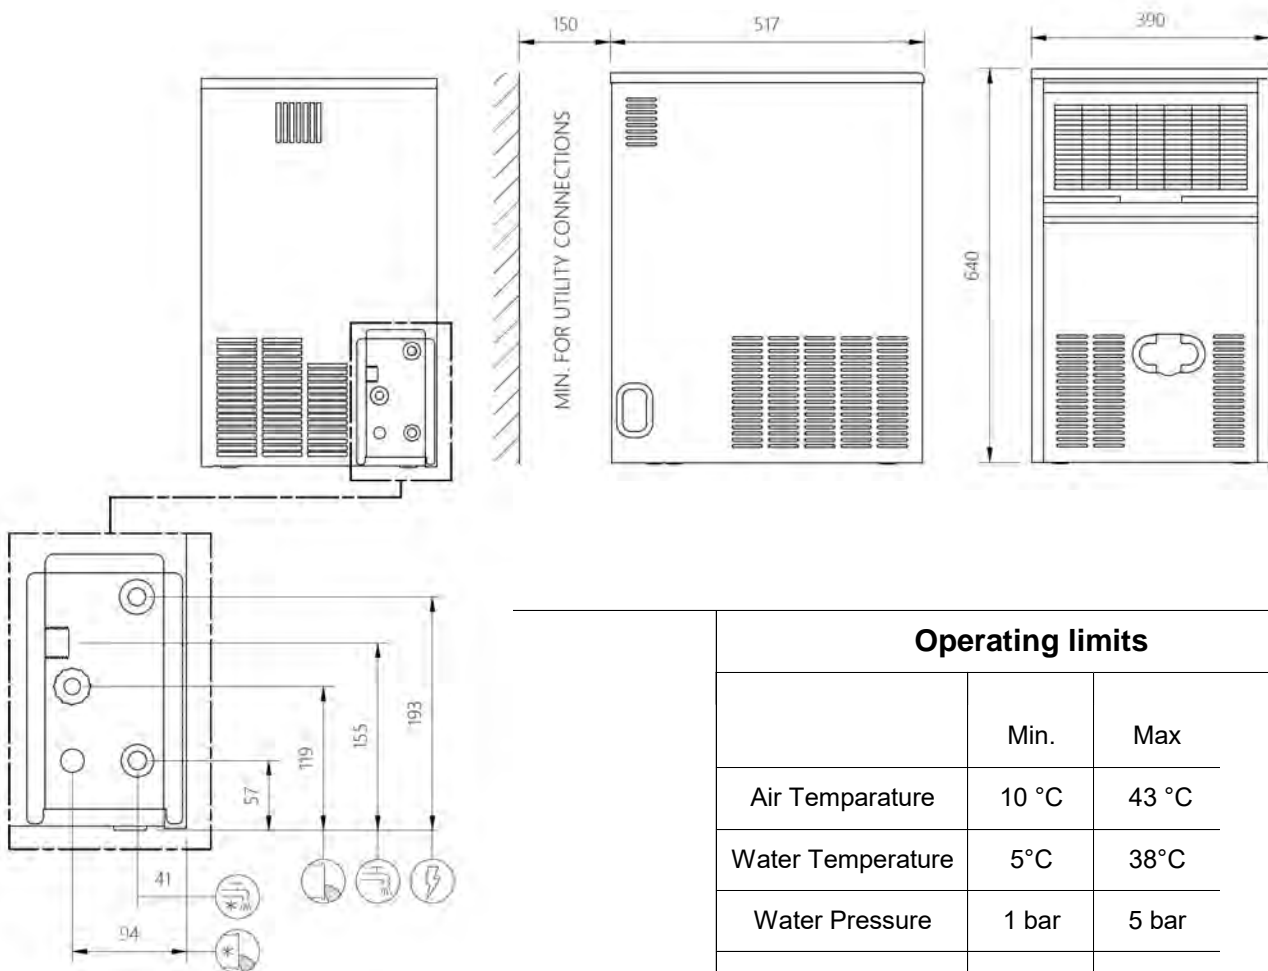

Operating limits

	Min.	Max
Air Temperature	10 °C	43 °C
Water Temperature	5°C	38°C
Water Pressure	1 bar	5 bar
Voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production Kg		Power Input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C	21°C/10°C		Type	Charge Kg		kWh/ 100kg	kWh/ 24h	Water l/h
BH 2508 A	230/50/1	25	24	325	R290	0,105	10	30,0	5,7	3,3
BH 2508 W	230/50/1	25	24	250	R290	0,11	10	22,9	4,8	21,5

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water

BAR LINE - Self Contained Machine Bistrot Cube

BAR LINE

ICE - MACHINES



B 3008AS/WS

Bar Line Equipment range is the newly released EU made ice makers for Thimble-shaped rounded ice cubes coming from Bar Line. Built in the Italian manufacturing plant of Frimont Spa, ISO 9001 Certified, these units are built with sturdy, corrosion resistant stainless steel, and feature European made componentry to assure maximum quality and reliability. Tested one by one, the Bar Line self contained units feature well balanced ratio between production and storage capacity, alongside with reduced outer dimensions that allow for built-in installations. Front air louvers assure appropriate airflow in critical install requirements. Contemporary, elegant design unites excellent operational features with the reliability obtained through years of successful experience in ice making technology. Insulated bin door and ice storage bin minimize air condensation and water formation on equipment surfaces. Electromechanic controls maximise reliability and ease of repair during the entire life of the equipment.

Proudly Made in Italy.

Also available in the self-contained range for "Bistrot" cube: **B 2006, B 2508, B 3015, B 4015, B 5022, B 6022, B 7540, B 9040, B 9550**

See pertaining literature for more details

B 3008

FEATURES:

- ✓ Improved water distribution system alongside with evaporator assembly: a larger number of ice cubes are now produced per each cycle, while the newly designed water distribution spray system provides best evaporator surface coverage and is simple to remove during routine cleaning.
- ✓ Optimized dimensions and production/storage ratios. Easier to fit even under lowest bar counters and in reduced footprint spaces.
- ✓ Front panel installed thermostatic controls for ice cube size and storage bin ice level sensor. Easily accessible, allow for an easy adjustment of the key working parameters of the machine.
- ✓ Bin-door slide rollers for a smooth open-close movement, with door movement rubber, sound dampening, shock absorbers.
- ✓ Utilities connection may run through side panel openings, as well as through the base panel, for a reduced depth installation requirement.

BAR LINE - Self Contained Machine Bistrot Cube

BAR LINE

ICE - MACHINES






B 3008

Also available in the self-contained range for "Bistrot" cube: **B 2006, B 2508, B 3015, B 4015, B 5022, B 6022, B 7540, B 9040, B 9550**

See pertaining literature for more details

B 3008 AS / WS

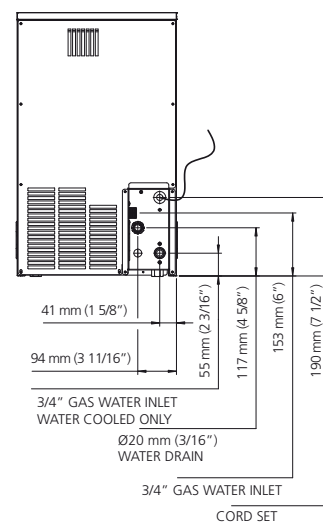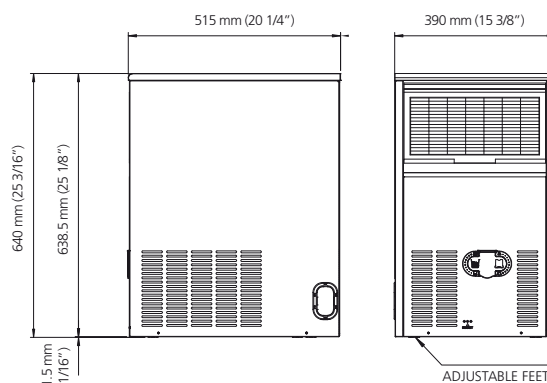

OPERATING LIMITS

Air Temp. Range	10°C - 43°C
Water Temp. Range	5°C - 38°C
Water Pressure	Min. 0.8 bar Max. 5 bar
Electrical Voltage	230V/50Hz/1ph (230V/60Hz/1ph on selected models)

All specifications and performance data are subject to normal manufacturing variances.

All panels are in stainless steel.



ORDERING AND SPECIFICATION INFORMATION

Model No.	Cond. unit	ICE Production per 24 hrs. at 10°C Air/10°C Water kg	Bin storage kg	Voltage Characteristics	Refrigerant	Water Consumption l/h*	Electric Consumption kWh/24h**	Net Weight kg	Max. Shipping Weight kg
B 3008 AS	Air	31	8,5	230/50/1	R134a	4	7	31	37
B 3008 WS	Water	28	8,5	230/50/1	R134a	27	6	31	37

*measured at 15°C water

**measured at 32°C air / 21°C water

BH 3008



34 kg Self-contained Ice Machine

Complete Range: BH 2006 - BH 2508 - BH 3008 - BH 3015 - BH 4015 - BH 5022 - BH 6022 - BH 7540 - BH 9050

Technical features

- Stainless steel bodywork - scotch brite
- Vertical pump
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- Refrigerant R290




Internal bin capacity



8,5 kg of Ice

424 cubes

Type of ice

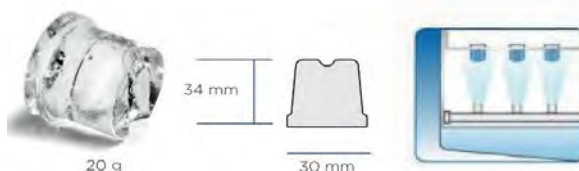

Machine dimensions

Voltage

230/50/1 Standard version

220-240/60/1 Available on demand

Net size WxDxH	390 x 515 x 640 mm
Net weight	32 kg
Shipping size WxDxH	460 x 580 x 760 mm
	36 kg

Technology and Certifications




BH 3008



34 kg Self-contained Ice Machine

Complete Range: BH 2006 - BH 2508 - BH 3008 - BH 3015 - BH 4015 - BH 5022 - BH 6022 - BH 7540 - BH 9050

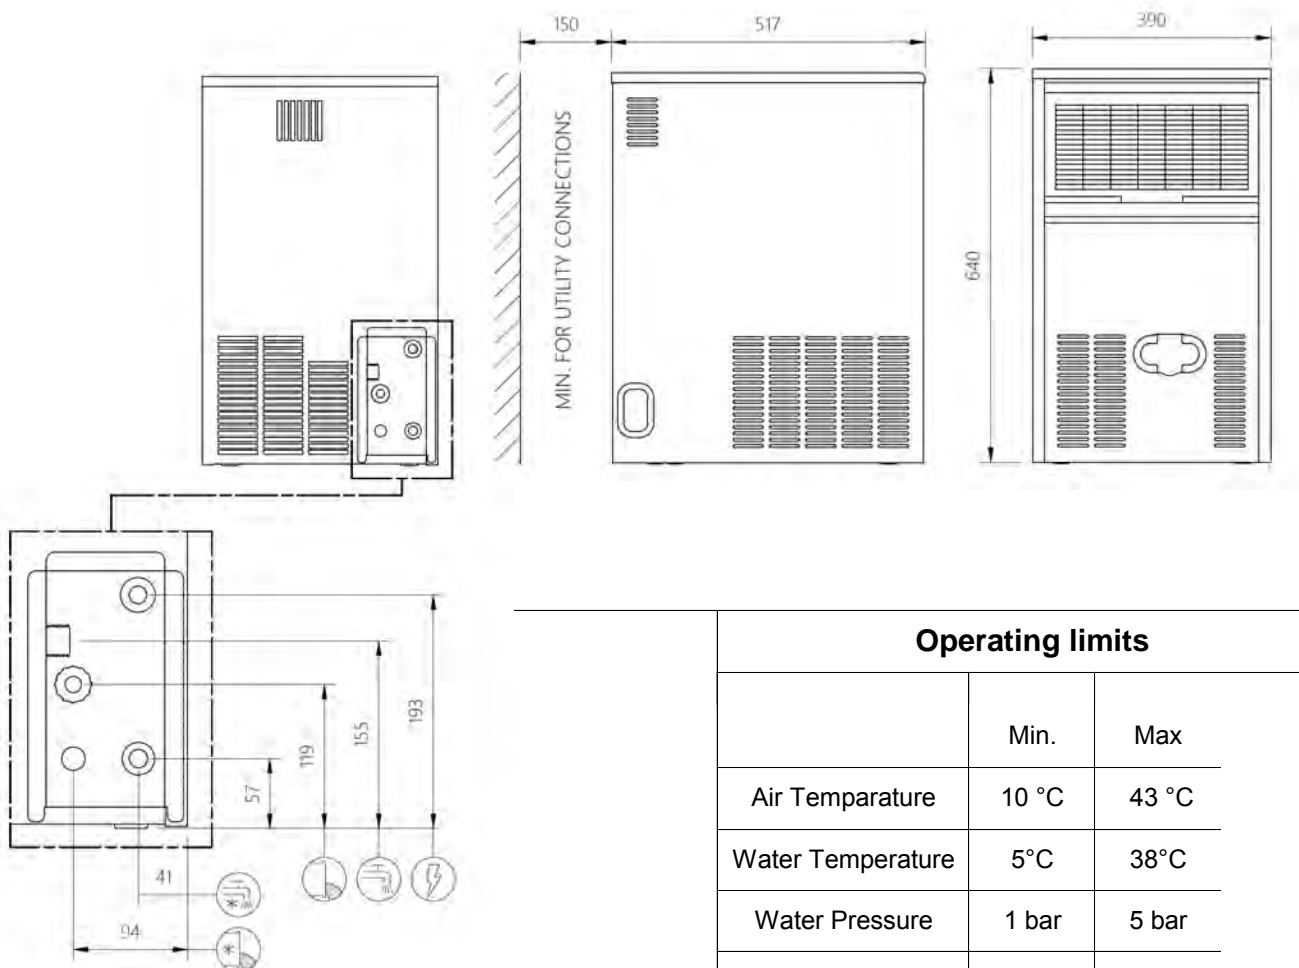

Operating limits

	Min.	Max
Air Temperature	10 °C	43 °C
Water Temperature	5°C	38°C
Water Pressure	1 bar	5 bar
Voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production Kg		Power Input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C	21°C/10°C		Type	Charge Kg		kWh/ 100kg	kWh/ 24h	Water l/h
BH 3008 A	230/50/1	31	29	340	R290	0,08	10	27,2	6,8	4,3
BH 3008 W	230/50/1	34	33	275	R290	0,07	10	19,6	5,5	29,0

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water

BAR LINE - Self Contained Machine Bistrot Cube

BAR LINE

ICE - MACHINES



B 3015 AS/WS

Bar Line Equipment range is the newly released EU made ice makers for Thimble-shaped rounded ice cubes coming from Bar Line. Built in the Italian manufacturing plant of Frimont Spa, ISO 9001 Certified, these units are built with sturdy, corrosion resistant stainless steel, and feature European made componentry to assure maximum quality and reliability. Tested one by one, the Bar Line self contained units feature well balanced ratio between production and storage capacity, alongside with reduced outer dimensions that allow for built-in installations. Front air louvers assure appropriate airflow in critical install requirements. Contemporary, elegant design unites excellent operational features with the reliability obtained through years of successful experience in ice making technology. Insulated bin door and ice storage bin minimize air condensation and water formation on equipment surfaces. Electromechanic controls maximise reliability and ease of repair during the entire life of the equipment.

Proudly Made in Italy.

FEATURES:

- ✓ Improved water distribution system alongside with evaporator assembly: a larger number of ice cubes are now produced per each cycle, while the newly designed water distribution spray system provides best evaporator surface coverage and is simple to remove during routine cleaning.
- ✓ Optimized dimensions and production/storage ratios. Easier to fit even under lowest bar counters and in reduced footprint spaces.
- ✓ Front panel installed thermostatic controls for ice cube size and storage bin ice level sensor. Easily accessible, allow for an easy adjustment of the key working parameters of the machine.
- ✓ Bin-door slide rollers for a smooth open-close movement, with door movement rubber, sound dampening, shock absorbers.
- ✓ Utilities connection may run through side panel openings, as well as through the base panel, for a reduced depth installation requirement.

Also available in the self-contained range for "Bistrot" cube: **B 2006, B 2508, B 3008, B 4015, B 5022, B 6022, B 7540, B 9040, B 9550**

See pertaining literature for more details

BAR LINE - Self Contained Machine Bistrot Cube

BAR LINE

ICE - MACHINES





B 3015

Also available in the self-contained range for "Bistrot" cube: **B 2006, B 2508, B 3008, B 4015, B 5022, B 6022, B 7540, B 9040, B 9550**

See pertaining literature for more details



B 3015 AS / WS

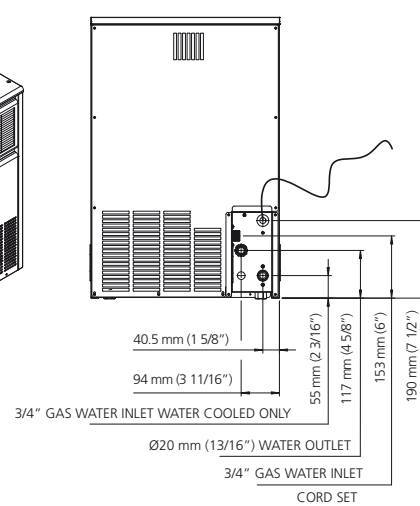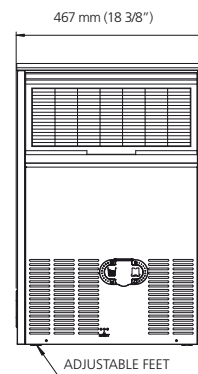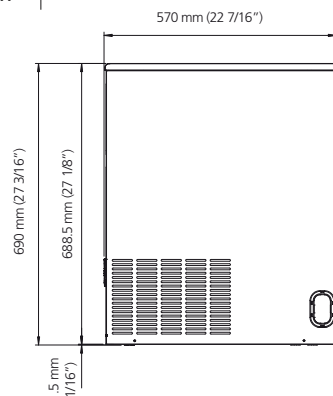

OPERATING LIMITS

Air Temp. Range	10°C - 43°C
Water Temp. Range	5°C - 38°C
Water Pressure	Min. 0.8 bar Max. 5 bar
Electrical Voltage	230V/50Hz/1ph (230V/60Hz/1ph on selected models)

All specifications and performance data are subject to normal manufacturing variances.

All panels are in stainless steel.



ORDERING AND SPECIFICATION INFORMATION

Model No.	Cond. unit	ICE Production per 24 hrs. at 10°C Air/10°C Water kg	Bin storage kg	Voltage Characteristics	Refrigerant	Water Consumption l/h*	Electric Consumption kWh/24h**	Net Weight kg	Max. Shipping Weight kg
B 3015 AS	Air	31	15	230/50/1	R134a	4	7	34	40
B 3015 WS	Water	28	15	230/50/1	R134a	27	6	34	40

*measured at 21°C water

**measured at 32°C air / 21°C water

BH 3015



34 kg Self-contained Ice Machine

Complete Range: BH 2006 - BH 2508 - BH 3008 - BH 3015 - BH 4015 - BH 5022 - BH 6022 - BH 7540 - BH 9050

Technical features

- Stainless steel bodywork - scotch brite
- Vertical pump
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- Refrigerant R290




Internal bin capacity



15 kg of Ice

750 cubes

Type of ice

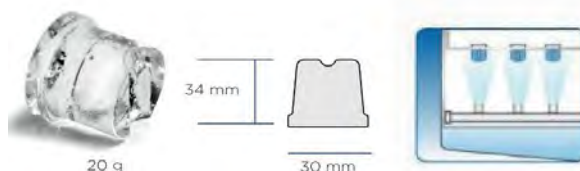

Machine dimensions

Voltage

230/50/1 Standard version

220-240/60/1 Available on demand

Net size WxDxH	467 x 570 x 640 mm
Net weight	34 kg
Shipping size WxDxH	540 x 640 x 800 mm
	40,2 kg

Technology and Certifications




BH 3015



34 kg Self-contained Ice Machine

Complete Range: BH 2006 - BH 2508 - BH 3008 - BH 3015 - BH 4015 - BH 5022 - BH 6022 - BH 7540 - BH 9050

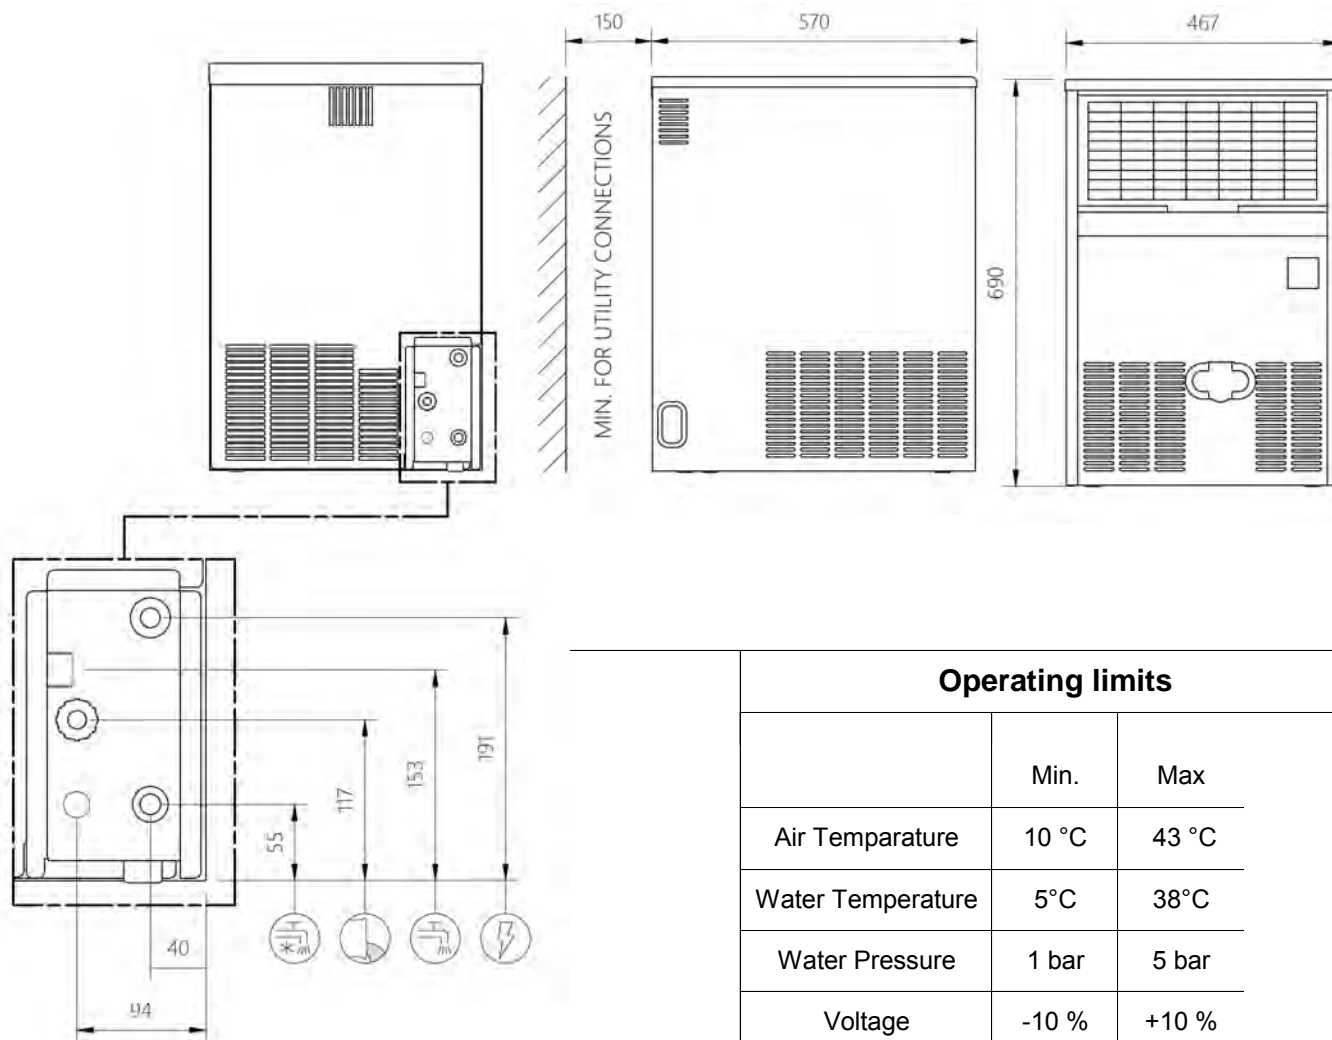

Operating limits

	Min.	Max
Air Temperature	10 °C	43 °C
Water Temperature	5°C	38°C
Water Pressure	1 bar	5 bar
Voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production Kg		Power Input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C	21°C/10°C		Type	Charge Kg		kWh/100kg	kWh/ 24h	Water l/h
BH 3015 A	230/50/1	31	29	340	R290	0,08	10	27,2	6,8	4,3
BH 3015 W	230/50/1	34	33	275	R290	0,07	10	19,6	5,5	29,0

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water

BAR LINE - Self Contained Machine Bistrot Cube

BAR LINE

ICE - MACHINES



B 4015 AS/WS

Bar Line Equipment range is the newly released EU made ice makers for Thimble-shaped rounded ice cubes coming from Bar Line. Built in the Italian manufacturing plant of Frimont Spa, ISO 9001 Certified, these units are built with sturdy, corrosion resistant stainless steel, and feature European made componentry to assure maximum quality and reliability. Tested one by one, the Bar Line self contained units feature well balanced ratio between production and storage capacity, alongside with reduced outer dimensions that allow for built-in installations. Front air louvers assure appropriate airflow in critical install requirements. Contemporary, elegant design unites excellent operational features with the reliability obtained through years of successful experience in ice making technology. Insulated bin door and ice storage bin minimize air condensation and water formation on equipment surfaces. Electromechanic controls maximise reliability and ease of repair during the entire life of the equipment.

Proudly Made in Italy.

Also available in the self-contained range for "Bistrot" cube: **B 2006, B 2508, B 3008, B 3015, B 5022, B 6022, B 7540, B 9040, B 9550**

See pertaining literature for more details

B 4015

FEATURES:

- ✓ Improved water distribution system alongside with evaporator assembly: a larger number of ice cubes are now produced per each cycle, while the newly designed water distribution spray system provides best evaporator surface coverage and is simple to remove during routine cleaning.
- ✓ Optimized dimensions and production/storage ratios. Easier to fit even under lowest bar counters and in reduced footprint spaces.
- ✓ Front panel installed thermostatic controls for ice cube size and storage bin ice level sensor. Easily accessible, allow for an easy adjustment of the key working parameters of the machine.
- ✓ Bin-door slide rollers for a smooth open-close movement, with door movement rubber, sound dampening, shock absorbers
- ✓ Utilities connection may run through side panel openings, as well as through the base panel, for a reduced depth installation requirement.

BAR LINE - Self Contained Machine Bistrot Cube

BAR LINE

ICE - MACHINES


B 4015

Also available in the self-contained range for "Bistrot" cube: **B 2006, B 2508, B 3008, B 3015, B 5022, B 6022, B 7540, B 9040, B 9550**

See pertaining literature for more details



B 4015 AS / WS


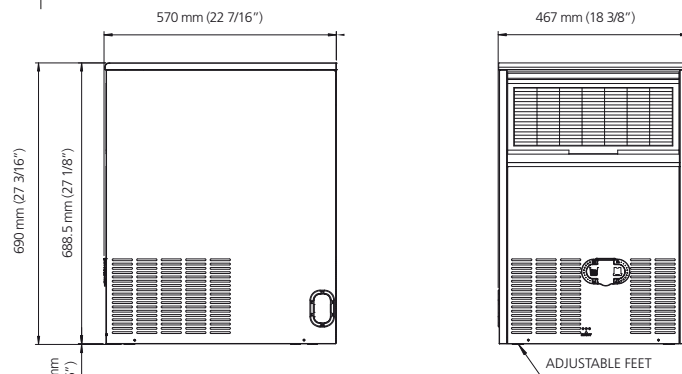


OPERATING LIMITS

Air Temp. Range	10°C - 43°C
Water Temp. Range	5°C - 38°C
Water Pressure	Min. 0.8 bar Max. 5 bar
Electrical Voltage	230V/50Hz/1ph (230V/60Hz/1ph on selected models)

All specifications and performance data are subject to normal manufacturing variances.

All panels are in stainless steel.

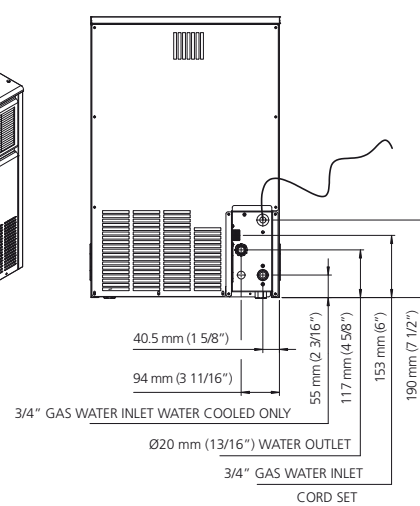

ORDERING AND SPECIFICATION INFORMATION

Model No.	Cond. unit	ICE Production per 24 hrs. at 10°C Air/10°C Water kg	Bin storage kg	Voltage Characteristics	Refrigerant	Water Consumption l/h*	Electric Consumption kWh/24h**	Net Weight kg	Max. Shipping Weight kg
B 4015 AS	Air	40	15	230/50/1	R134a	5	9	35	41
B 4015 WS	Water	38	15	230/50/1	R134a	34	8	35	41

*measured at 21°C water

**measured at 32°C air / 21°C water

BH 4015



43 kg Self-contained Ice Machine

Complete Range: BH 2006 - BH 2508 - BH 3008 - BH 3015 - BH 4015 - BH 5022 - BH 6022 - BH 7540 - BH 9050

Technical features

- Stainless steel bodywork - scotch brite
- Vertical pump
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- Refrigerant R290




Internal bin capacity



15 kg of Ice

750 cubes

Type of ice

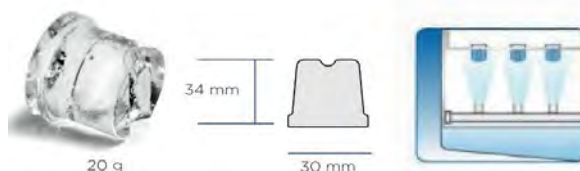

Machine dimensions

Voltage

230/50/1 Standard version

220-240/60/1 Available on demand

Net size WxDxH	867 x 570 x 690 mm
Net weight	35 kg
Shipping size WxDxH	540 x 640 x 800 mm
	44 kg

Technology and Certifications




BH 4015



43 kg Self-contained Ice Machine

Complete Range: BH 2006 - BH 2508 - BH 3008 - BH 3015 - BH 4015 - BH 5022 - BH 6022 - BH 7540 - BH 9050

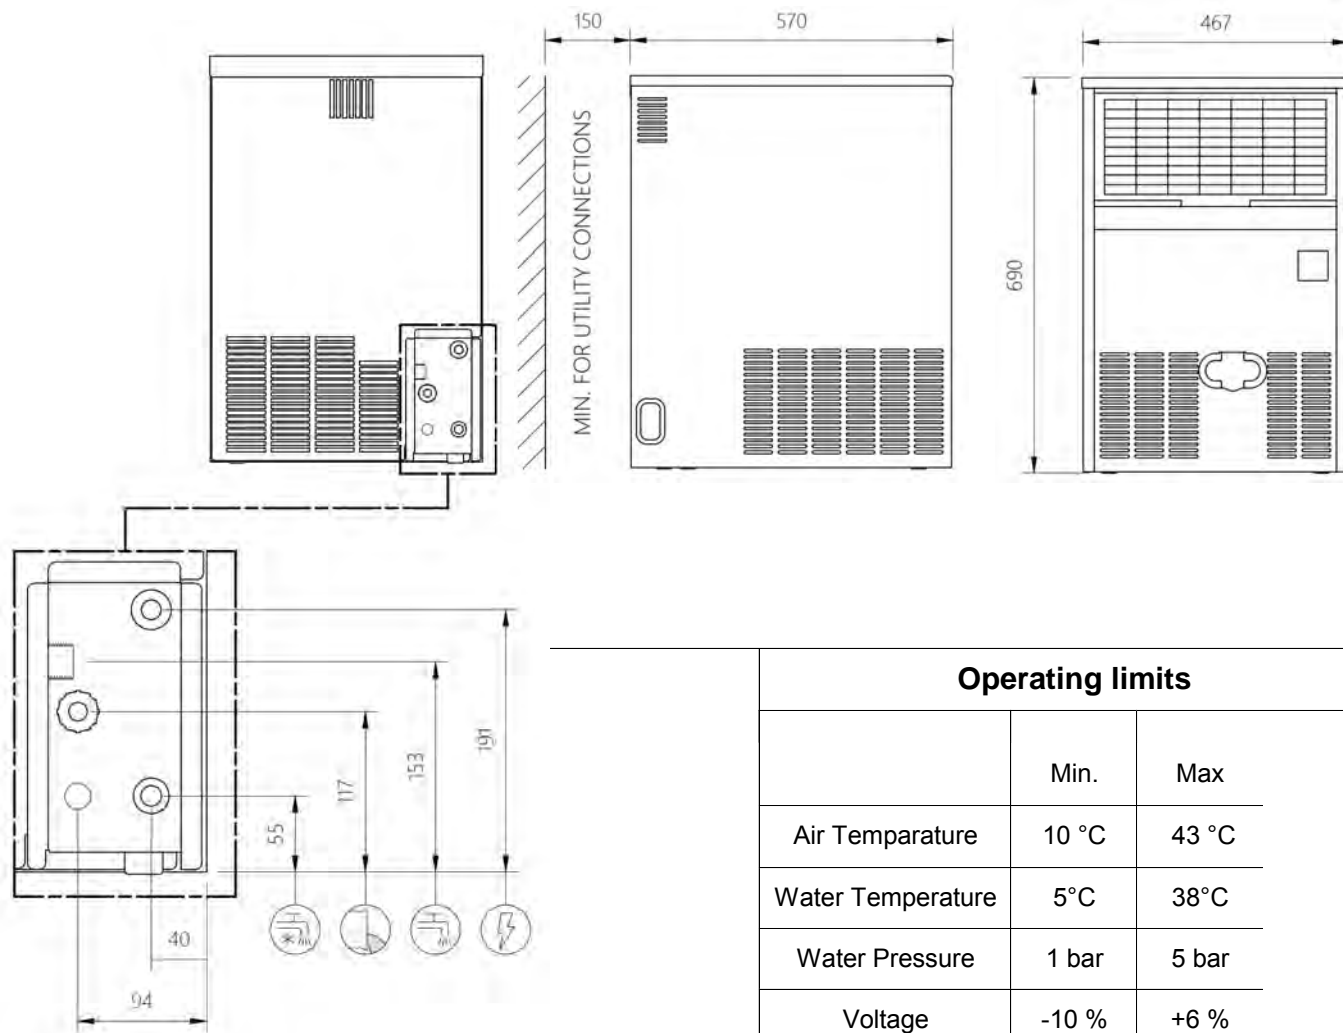

Operating limits

	Min.	Max
Air Temperature	10 °C	43 °C
Water Temperature	5°C	38°C
Water Pressure	1 bar	5 bar
Voltage	-10 %	+6 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production Kg		Power Input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C	21°C/10°C		Type	Charge Kg		kWh/100kg	kWh/ 24h	Water l/h
BH 4015 A	230/50/1	43	37	600	R290	0,105	10	38,6	10,8	4,3
BH 4015 W	230/50/1	42	38	375	R290	0,125	10	22,6	7,0	28,0

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water

BAR LINE - Self Contained Machine Bistrot Cube

BAR LINE

ICE - MACHINES



B 5022 AS/WS

Bar Line Equipment range is the newly released EU made ice makers for Thimble-shaped rounded ice cubes coming from Bar Line. Built in the Italian manufacturing plant of Frimont Spa, ISO 9001 Certified, these units are built with sturdy, corrosion resistant stainless steel, and feature European made componentry to assure maximum quality and reliability. Tested one by one, the Bar Line self contained units feature well balanced ratio between production and storage capacity, alongside with reduced outer dimensions that allow for built-in installations. Front air louvers assure appropriate airflow in critical install requirements. Contemporary, elegant design unites excellent operational features with the reliability obtained through years of successful experience in ice making technology. Insulated bin door and ice storage bin minimize air condensation and water formation on equipment surfaces. Electromechanic controls maximise reliability and ease of repair during the entire life of the equipment.

Proudly Made in Italy.

Also available in the self-contained range for "Bistrot" cube: B 2006, B 2508, B 3008, B 3015, B 4015, B 6022, B 7540, B 9040, B 9550

See pertaining literature for more details

B 5022

FEATURES:

- ✓ Improved water distribution system alongside with evaporator assembly: a larger number of ice cubes are now produced per each cycle, while the newly designed water distribution spray system provides best evaporator surface coverage and is simple to remove during routine cleaning.
- ✓ Optimized dimensions and production/storage ratios. Easier to fit even under lowest bar counters and in reduced footprint spaces.
- ✓ Front panel installed thermostatic controls for ice cube size and storage bin ice level sensor. Easily accessible, allow for an easy adjustment of the key working parameters of the machine.
- ✓ Bin-door slide rollers for a smooth open-close movement, with door movement rubber, sound dampening, shock absorbers.
- ✓ Utilities connection may run through side panel openings, as well as through the base panel, for a reduced depth installation requirement.




BAR LINE - Self Contained Machine Bistrot Cube

BAR LINE

ICE - MACHINES



B 5022 AS / WS

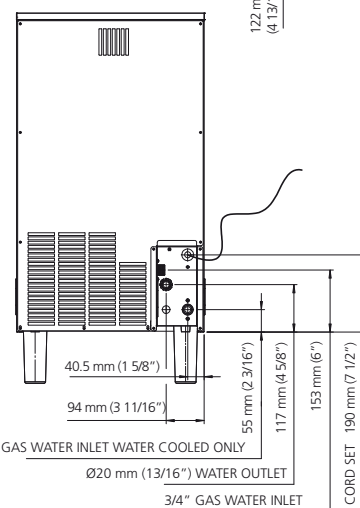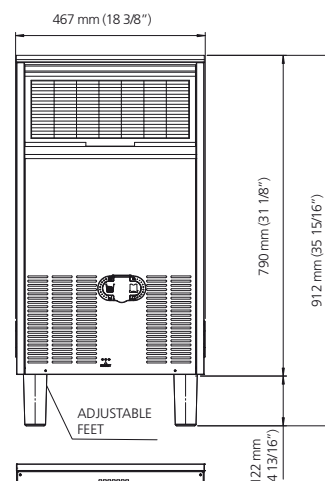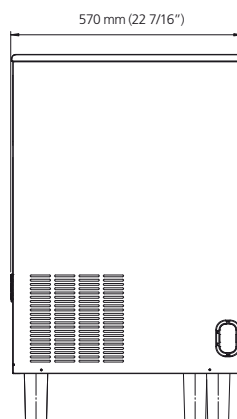

OPERATING LIMITS

Air Temp. Range	10°C - 43°C
Water Temp. Range	5°C - 38°C
Water Pressure	Min. 0.8 bar Max. 5 bar
Electrical Voltage	230V/50Hz/1ph (230V/60Hz/1ph on selected models)

All specifications and performance data are subject to normal manufacturing variances.

All panels are in stainless steel.



ORDERING AND SPECIFICATION INFORMATION

Model No.	Cond. unit	ICE Production per 24 hrs. at 10°C Air/10°C Water kg	Bin storage kg	Voltage Characteristics	Refrigerant	Water Consumption l/h*	Electric Consumption kWh/24h**	Net Weight kg	Max. Shipping Weight kg
B 5022 AS	Air	48	22	230/50/1	R134a	6	9	38	44
B 5022 WS	Water	48	22	230/50/1	R134a	40	8	38	44

*measured at 21°C water

**measured at 32°C air / 21°C water

Also available in the self-contained range for "Bistrot" cube: B 2006, B 2508, B 3008, B 3015, B 4015, B 6022, B 7540, B 9040, B 9550

See pertaining literature for more details

B 5022

BH 5022



51 kg Self-contained Ice Machine

Complete Range: BH 2006 - BH 2508 - BH 3008 - BH 3015 - BH 4015 - BH 5022 - BH 6022 - BH 7540 - BH 9050

Technical features

- Stainless steel bodywork - scotch brite
- Vertical pump
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- Refrigerant R290




Internal bin capacity



22 kg of Ice

1222 cubes

Type of ice

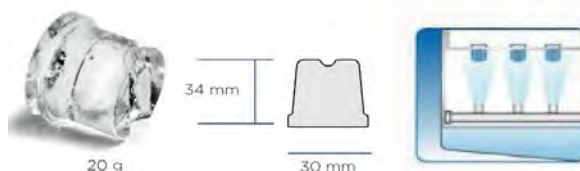

Machine dimensions

Voltage

230/50/1 Standard version

220-240/60/1 Available on demand

Net size WxDxH 467 x 570 x 790 mm

Net weight 38 kg

Shipping size WxDxH 540 x 640 x 900 mm

46 kg

Technology and Certifications




BH 5022



51 kg Self-contained Ice Machine

Complete Range: BH 2006 - BH 2508 - BH 3008 - BH 3015 - BH 4015 - BH 5022 - BH 6022 - BH 7540 - BH 9050

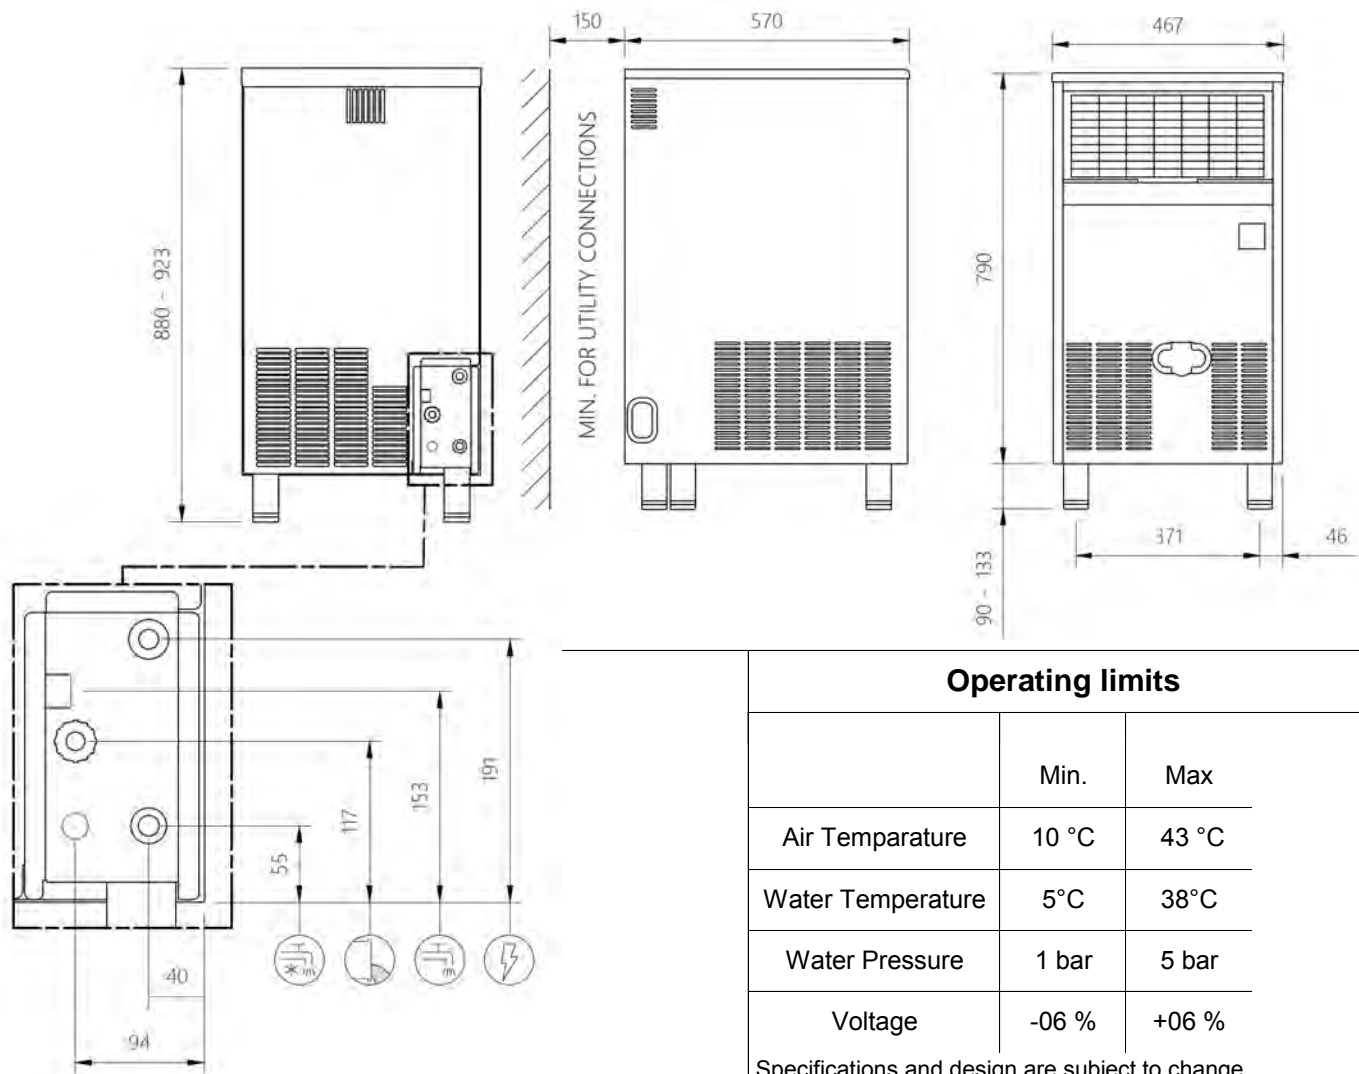

Operating limits

	Min.	Max
Air Temperature	10 °C	43 °C
Water Temperature	5°C	38°C
Water Pressure	1 bar	5 bar
Voltage	-06 %	+06 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production Kg		Power Input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C	21°C/10°C		Type	Charge Kg		kWh/100kg	kWh/ 24h	Water l/h
BH 5022 A	230/50/1	51	47	640	R290	0,14	10	40,7	12,2	4,4
BH 5022 W	230/50/1	42	38	375	R290	0,125	10	22,6	7,0	28,0

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water

BAR LINE - Self Contained Machine Bistrot Cube

BAR LINE

ICE - MACHINES



B 6022 AS/WS

Bar Line Equipment range is the newly released EU made ice makers for Thimble-shaped rounded ice cubes coming from Bar Line. Built in the Italian manufacturing plant of Frimont Spa, ISO 9001 Certified, these units are built with sturdy, corrosion resistant stainless steel, and feature European made componentry to assure maximum quality and reliability. Tested one by one, the Bar Line self contained units feature well balanced ratio between production and storage capacity, alongside with reduced outer dimensions that allow for built-in installations. Front air louvers assure appropriate airflow in critical install requirements. Contemporary, elegant design unites excellent operational features with the reliability obtained through years of successful experience in ice making technology. Insulated bin door and ice storage bin minimize air condensation and water formation on equipment surfaces. Electromechanic controls maximise reliability and ease of repair during the entire life of the equipment.

Proudly Made in Italy.

Also available in the self-contained range for "Bistrot" cube: B 2006, B 2508, B 3008, B 3015, B 4015, B5022, B 7540, B 9040, B 9550

See pertaining literature for more details

B 6022

FEATURES:

- ✓ Improved water distribution system alongside with evaporator assembly: a larger number of ice cubes are now produced per each cycle, while the newly designed water distribution spray system provides best evaporator surface coverage and is simple to remove during routine cleaning.
- ✓ Optimized dimensions and production/storage ratios. Easier to fit even under lowest bar counters and in reduced footprint spaces.
- ✓ Front panel installed thermostatic controls for ice cube size and storage bin ice level sensor. Easily accessible, allow for an easy adjustment of the key working parameters of the machine.
- ✓ Bin-door slide rollers for a smooth open-close movement, with door movement rubber, sound dampening, shock absorbers.
- ✓ Utilities connection may run through side panel openings, as well as through the base panel, for a reduced depth installation requirement.

BAR LINE - Self Contained Machine Bistrot Cube

BAR LINE

ICE - MACHINES




B 6022

Also available in the self-contained range for "Bistrot" cube: B 2006, B 2508, B 3008, B 3015, B 4015, B5022, B 7540, B 9040, B 9550

See pertaining literature for more details



B 6022 AS / WS

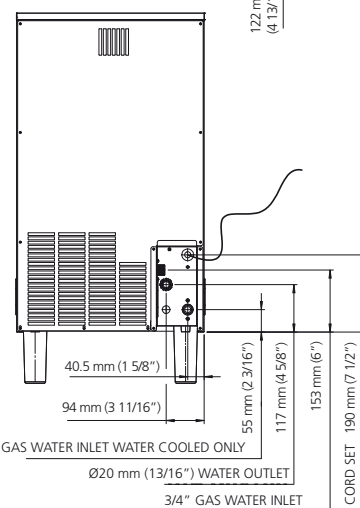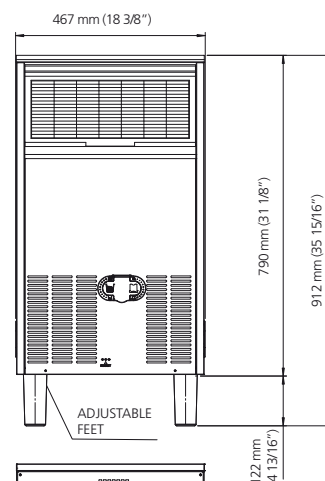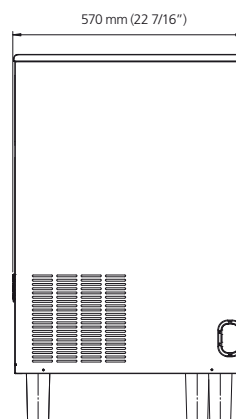

OPERATING LIMITS

Air Temp. Range	10°C - 43°C
Water Temp. Range	5°C - 38°C
Water Pressure	Min. 0.8 bar Max. 5 bar
Electrical Voltage	230V/50Hz/1ph (230V/60Hz/1ph on selected models)

All specifications and performance data are subject to normal manufacturing variances.

All panels are in stainless steel.



ORDERING AND SPECIFICATION INFORMATION

Model No.	Cond. unit	ICE Production per 24 hrs. at 10°C Air/10°C Water kg	Bin storage kg	Voltage Characteristics	Refrigerant	Water Consumption l/h*	Electric Consumption kWh/24h**	Net Weight kg	Max. Shipping Weight kg
B 6022 AS	Air	60	22	230/50/1	R134a	6	12	39	45
B 6022 WS	Water	61	22	230/50/1	R134a	40	11	39	45

*measured at 21°C water

**measured at 32°C air / 21°C water

BH 6022



55 kg Self-contained Ice Machine

Complete Range: BH 2006 - BH 2508 - BH 3008 - BH 3015 - BH 4015 - BH 5022 - BH 6022 - BH 7540 - BH 9050

Technical features

- Stainless steel bodywork - scotch brite
- Vertical pump
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- Refrigerant R290




Internal bin capacity



22 kg of Ice

1222 cubes

Type of ice

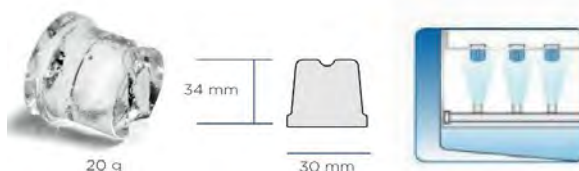

Machine dimensions

Voltage

230/50/1 Standard version

220-240/60/1 Available on demand

Net size WxDxH 467 x 570 x 790 mm

Net weight 39 kg

Shipping size WxDxH 540 x 640 x 900 mm

48 kg

Technology and Certifications




BH 6022



55 kg Self-contained Ice Machine

Complete Range: BH 2006 - BH 2508 - BH 3008 - BH 3015 - BH 4015 - BH 5022 - BH 6022 - BH 7540 - BH 9050

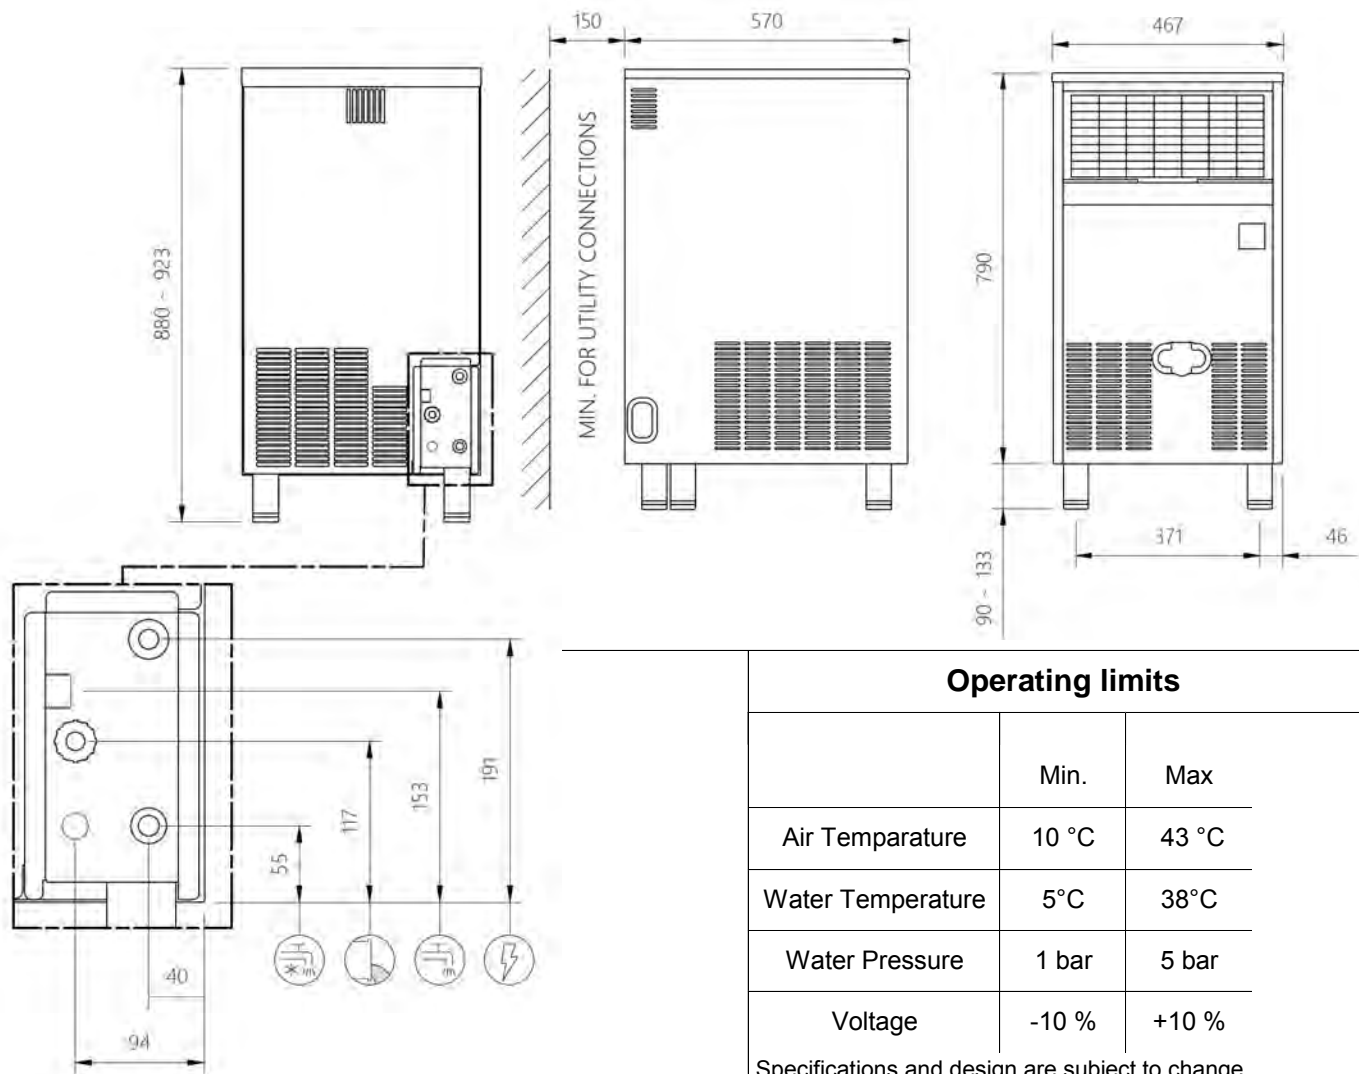

Operating limits

	Min.	Max
Air Temperature	10 °C	43 °C
Water Temperature	5°C	38°C
Water Pressure	1 bar	5 bar
Voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production Kg		Power Input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C	21°C/10°C		Type	Charge Kg		kWh/100kg	kWh/ 24h	Water l/h
BH 6022 A	230/50/1	55	54	550	R290	0,11	10	22,6	9,7	5,6
BH 6022 W	230/50/1	42	38	375	R290	0,125	10	22,6	7,0	28,0

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water

BAR LINE - Self Contained Machine Bistrot Cube

BAR LINE

ICE - MACHINES



B 7540 AS/WS

Bar Line Equipment range is the newly released EU made ice makers for Thimble-shaped rounded ice cubes coming from Bar Line. Built in the Italian manufacturing plant of Frimont Spa, ISO 9001 Certified, these units are built with sturdy, corrosion resistant stainless steel, and feature European made componentry to assure maximum quality and reliability. Tested one by one, the Bar Line self contained units feature well balanced ratio between production and storage capacity, alongside with reduced outer dimensions that allow for built-in installations. Front air louvers assure appropriate airflow in critical install requirements. Contemporary, elegant design unites excellent operational features with the reliability obtained through years of successful experience in ice making technology. Insulated bin door and ice storage bin minimize air condensation and water formation on equipment surfaces. Electromechanic controls maximise reliability and ease of repair during the entire life of the equipment.

Proudly Made in Italy.

Also available in the self-contained range for "Bistrot" cube: B 2006, B 2508, B 3008, B 3015, B 4015, B5022, B 6022, B 9040, B 9550

See pertaining literature for more details

B 7540

FEATURES:

- ✓ Improved water distribution system alongside with evaporator assembly: a larger number of ice cubes are now produced per each cycle, while the newly designed water distribution spray system provides best evaporator surface coverage and is simple to remove during routine cleaning.
- ✓ Optimized dimensions and production/storage ratios. Easier to fit even under lowest bar counters and in reduced footprint spaces.
- ✓ Front panel installed thermostatic controls for ice cube size and storage bin ice level sensor. Easily accessible, allow for an easy adjustment of the key working parameters of the machine.
- ✓ Bin-door slide rollers for a smooth open-close movement, with door movement rubber, sound dampening, shock absorbers.
- ✓ Utilities connection may run through side panel openings, as well as through the base panel, for a reduced depth installation requirement.

BAR LINE - Self Contained Machine Bistrot Cube


BAR LINE

ICE - MACHINES

B 7540

Also available in the self-contained range for "Bistrot" cube: B 2006, B 2508, B 3008, B 3015, B 4015, B5022, B 6022, B 9040, B 9550

See pertaining literature for more details

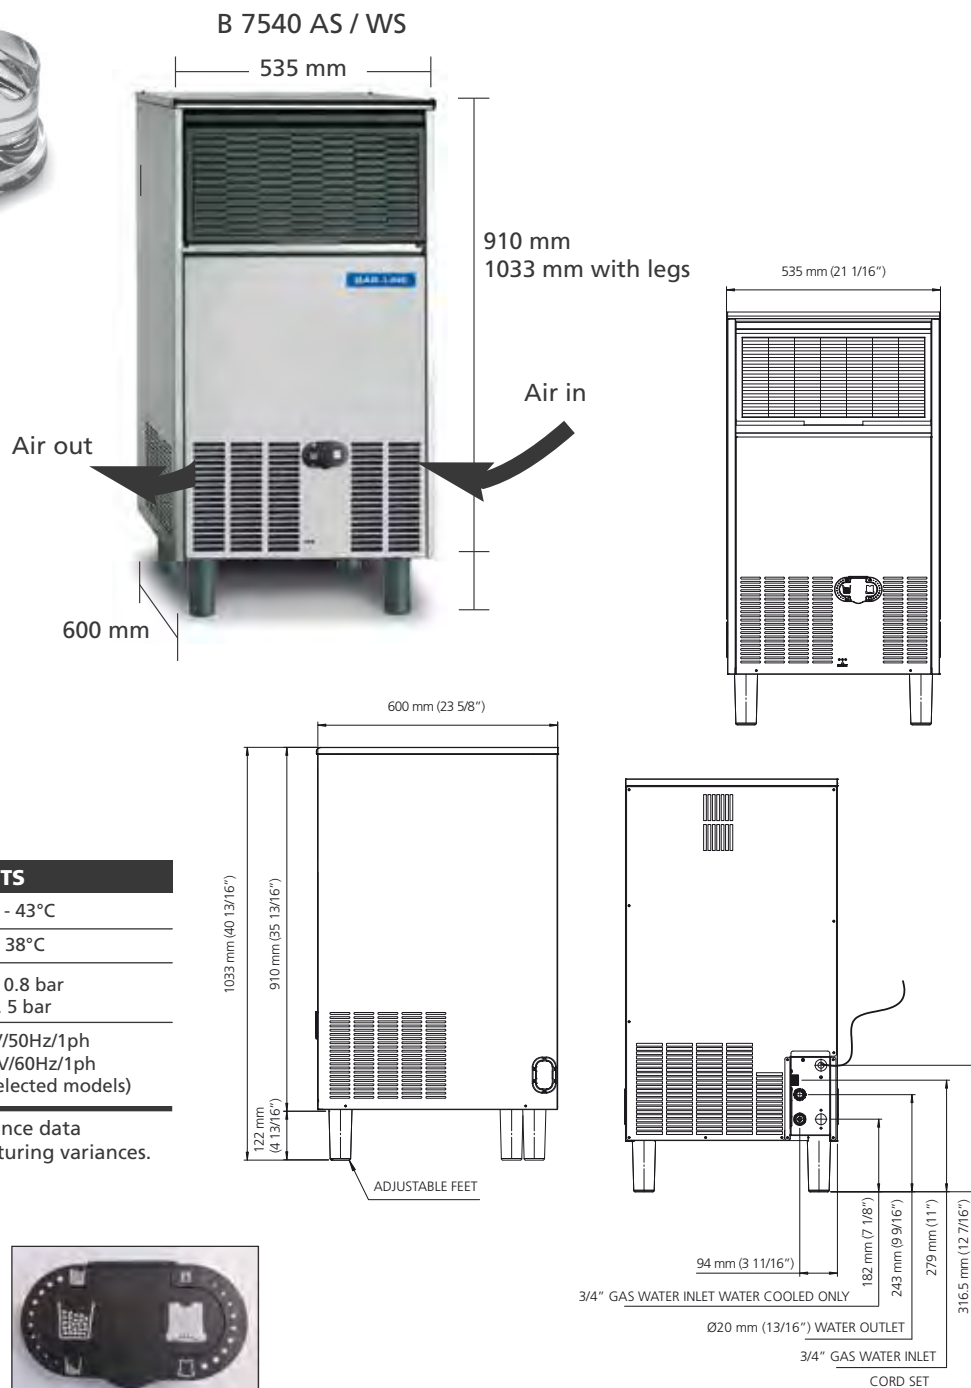

OPERATING LIMITS

Air Temp. Range	10°C - 43°C
Water Temp. Range	5°C - 38°C
Water Pressure	Min. 0.8 bar Max. 5 bar
Electrical Voltage	230V/50Hz/1ph (230V/60Hz/1ph on selected models)

All specifications and performance data are subject to normal manufacturing variances.

All panels are in stainless steel.



ORDERING AND SPECIFICATION INFORMATION

Model No.	Cond. unit	ICE Production per 24 hrs. at 10°C Air/10°C Water kg	Bin storage kg	Voltage Characteristics	Refrigerant	Water Consumption l/h*	Electric Consumption kWh/24h**	Net Weight kg	Max. Shipping Weight kg
B 7540 AS	Air	75	40	230/50/1	R134a	8	15	45	52
B 7540 WS	Water	75	40	230/50/1	R134a	48	13	45	52

*measured at 21°C water

**measured at 32°C air / 21°C water

BH 7540



73 kg Self-contained Ice Machine

Complete Range: BH 2006 - BH 2508 - BH 3008 - BH 3015 - BH 4015 - BH 5022 - BH 6022 - BH 7540 - BH 9050

Technical features

- Stainless steel bodywork - scotch brite
- Vertical pump
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- Refrigerant R290




Internal bin capacity



39 kg of Ice

1950 cubes

Type of ice

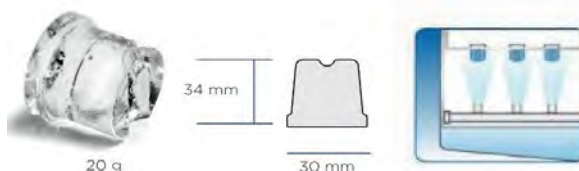

Machine dimensions

Voltage

230/50/1 Standard version

220-240/60/1 Available on demand

Net size WxDxH	535 x 600 x 910 mm
Net weight	45 kg
Shipping size WxDxH	630 x 680 x 1020 mm
	59 kg

Technology and Certifications




BH 7540



73 kg Self-contained Ice Machine

Complete Range: BH 2006 - BH 2508 - BH 3008 - BH 3015 - BH 4015 - BH 5022 - BH 6022 - BH 7540 - BH 9050

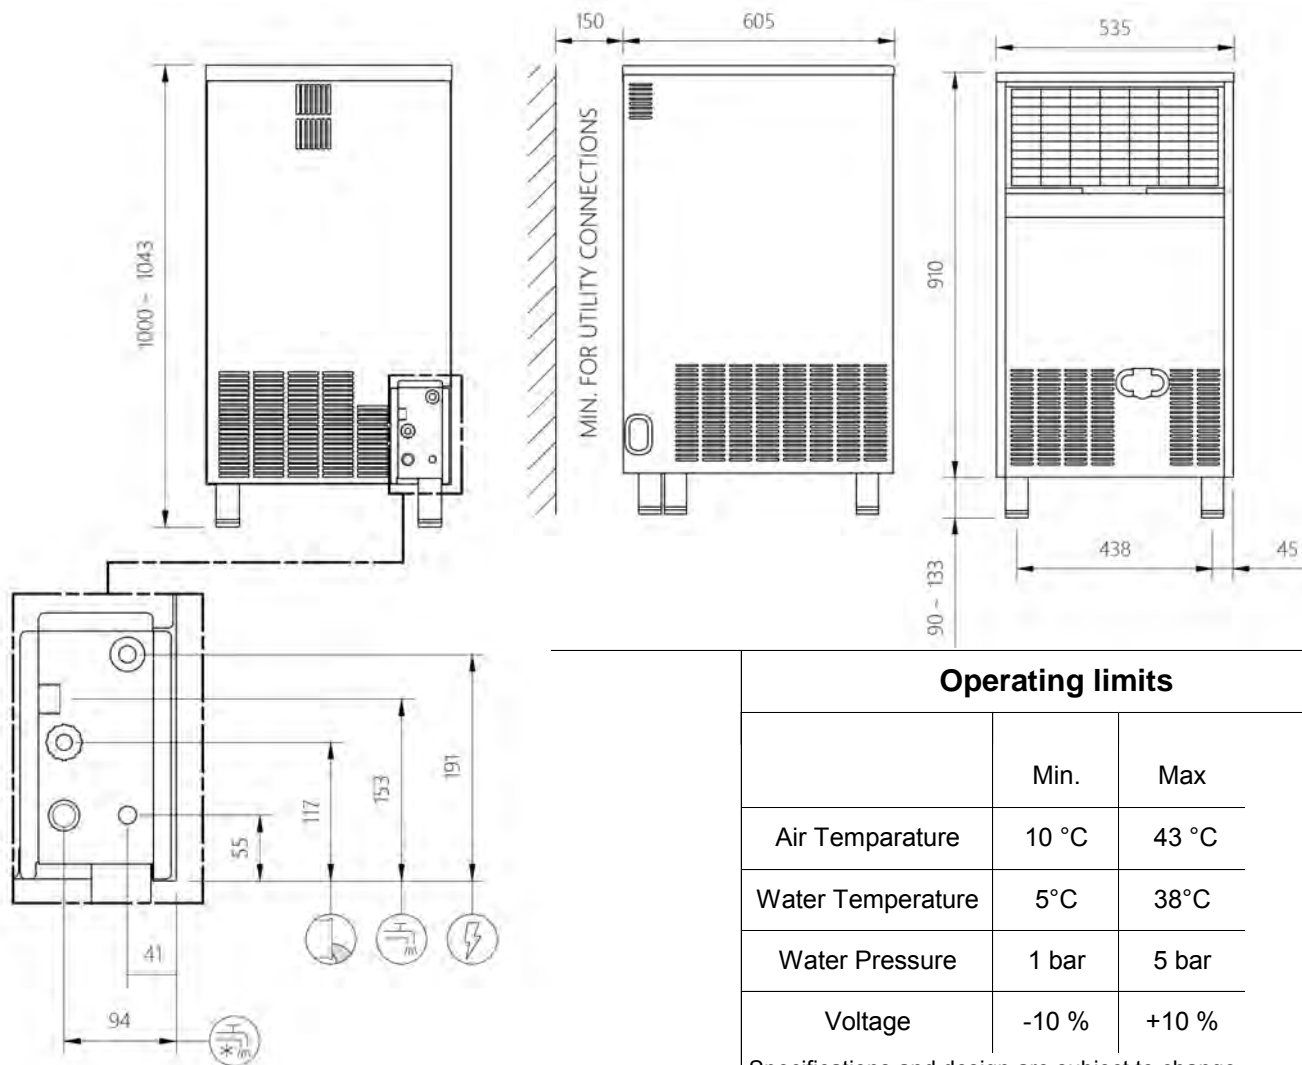

Operating limits

	Min.	Max
Air Temperature	10 °C	43 °C
Water Temperature	5°C	38°C
Water Pressure	1 bar	5 bar
Voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production Kg		Power Input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C	21°C/10°C		Type	Charge Kg		kWh/100kg	kWh/ 24h	Water l/h
BH 7540 A	230/50/1	73	71	720	R290	0,1	10	25,0	14,0	9,0
BH 7540 W	230/50/1	70	66	630	R290	0,1	10	23,1	13,6	36,9

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water



B 9040

Also available in the self-contained range for "Bistrot" cube: B 2006, B 2508, B 3008, B 3015, B 4015, B5022, B 6022, B 7540, B 9550

See pertaining literature for more details



B 9040 AS/WS

Bar Line Equipment range is the newly released EU made ice makers for Thimble-shaped rounded ice cubes coming from Bar Line.

Built in the Italian manufacturing plant of Frimont Spa, ISO 9001 Certified, these units are built with sturdy, corrosion resistant stainless steel, and feature European made componentry to assure maximum quality and reliability.

Tested one by one, the Bar Line self contained units feature well balanced ratio between production and storage capacity, alongside with reduced outer dimensions that allow for built-in installations.

Front air louvers assure appropriate airflow in critical install requirements. Contemporary, elegant design unites excellent operational features with the reliability obtained through years of successful experience in ice making technology.

Insulated bin door and ice storage bin minimize air condensation and water formation on equipment surfaces.

Electromechanic controls maximise reliability and ease of repair during the entire life of the equipment.

Proudly Made in Italy.

FEATURES:

- ✓ Improved water distribution system alongside with evaporator assembly: a larger number of ice cubes are now produced per each cycle, while the newly designed water distribution spray system provides best evaporator surface coverage and is simple to remove during routine cleaning.
- ✓ Optimized dimensions and production/storage ratios. Easier to fit even under lowest bar counters and in reduced footprint spaces.
- ✓ Front panel installed thermostatic controls for ice cube size and storage bin ice level sensor. Easily accessible, allow for an easy adjustment of the key working parameters of the machine.
- ✓ Bin-door slide rollers for a smooth open-close movement, with door movement rubber, sound dampening, shock absorbers.
- ✓ Utilities connection may run through side panel openings, as well as through the base panel, for a reduced depth installation requirement.

BAR LINE - Self Contained Machine Bistrot Cube

BAR LINE



ICE - MACHINES

B 9040

Also available in the self-contained range for "Bistrot" cube: B 2006, B 2508, B 3008, B 3015, B 4015, B5022, B 6022, B 7540, B 9550
See pertaining literature for more details



B 9040 AS / WS

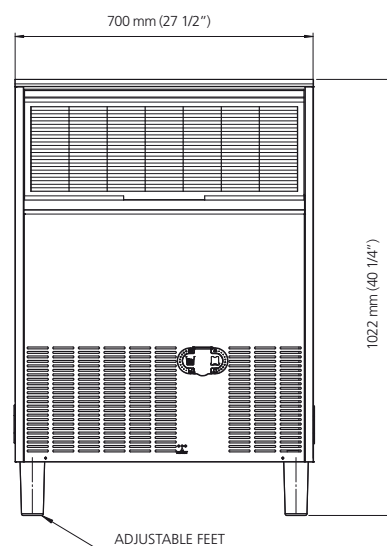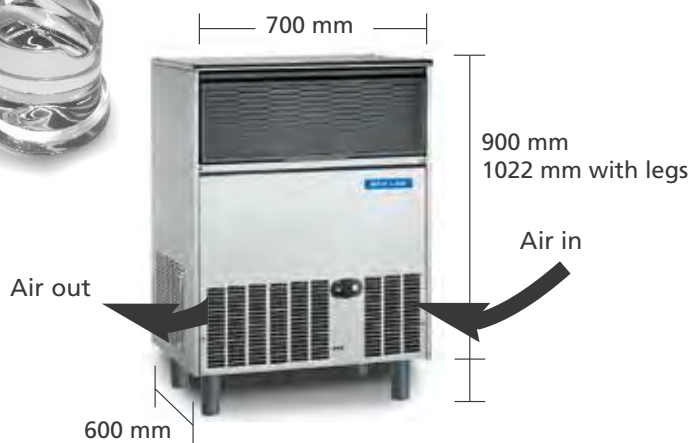


OPERATING LIMITS

Air Temp. Range	10°C - 43°C
Water Temp. Range	5°C - 38°C
Water Pressure	Min. 0.8 bar Max. 5 bar
Electrical Voltage	230V/50Hz/1ph (230V/60Hz/1ph on selected models)

All specifications and performance data are subject to normal manufacturing variances.

All panels are in stainless steel.

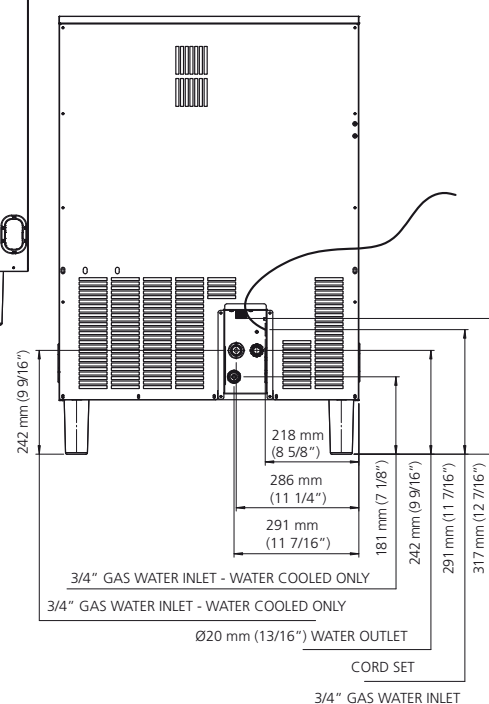

ORDERING AND SPECIFICATION INFORMATION

Model No.	Cond. unit	ICE Production per 24 hrs. at 10°C Air/10°C Water kg	Bin storage kg	Voltage Characteristics	Refrigerant	Water Consumption l/h*	Electric Consumption kWh/24h**	Net Weight kg	Max. Shipping Weight kg
B 9040 AS	Air	88	40	230/50/1	R134a	8	15	56	65
B 9040 WS	Water	89	40	230/50/1	R134a	46	13	56	65

*measured at 21°C water

**measured at 32°C air / 21°C water

BAR LINE - Self Contained Machine Bistrot Cube

BAR LINE

ICE - MACHINES



B 9550 AS/WS

Bar Line Equipment range is the newly released EU made ice makers for Thimble-shaped rounded ice cubes coming from Bar Line. Built in the Italian manufacturing plant of Frimont Spa, ISO 9001 Certified, these units are built with sturdy, corrosion resistant stainless steel, and feature European made componentry to assure maximum quality and reliability. Tested one by one, the Bar Line self contained units feature well balanced ratio between production and storage capacity, alongside with reduced outer dimensions that allow for built-in installations. Front air louvers assure appropriate airflow in critical install requirements. Contemporary, elegant design unites excellent operational features with the reliability obtained through years of successful experience in ice making technology. Insulated bin door and ice storage bin minimize air condensation and water formation on equipment surfaces. Electromechanic controls maximise reliability and ease of repair during the entire life of the equipment.

Proudly Made in Italy.

B 9550

Also available in the self-contained range for "Bistrot" cube: B 2006, B 2508, B 3008, B 3015, B 4015, B5022, B 6022, B 7540, B 9040

See pertaining literature for more details

FEATURES:

- ✓ Improved water distribution system alongside with evaporator assembly: a larger number of ice cubes are now produced per each cycle, while the newly designed water distribution spray system provides best evaporator surface coverage and is simple to remove during routine cleaning.
- ✓ Optimized dimensions and production/storage ratios. Easier to fit even under lowest bar counters and in reduced footprint spaces.
- ✓ Front panel installed thermostatic controls for ice cube size and storage bin ice level sensor. Easily accessible, allow for an easy adjustment of the key working parameters of the machine.
- ✓ Bin-door slide rollers for a smooth open-close movement, with door movement rubber, sound dampening, shock absorbers.
- ✓ Utilities connection may run through side panel openings, as well as through the base panel, for a reduced depth installation requirement.

BAR LINE - Self Contained Machine Bistrot Cube

BAR LINE




ICE - MACHINES

B 9550

Also available in the self-contained range for "Bistrot" cube: B 2006, B 2508, B 3008, B 3015, B 4015, B5022, B 6022, B 7540, B 9040
See pertaining literature for more details



B 9550 AS / WS

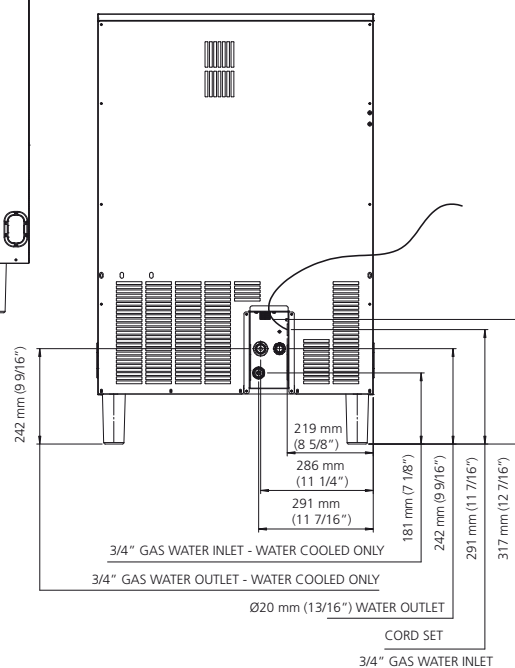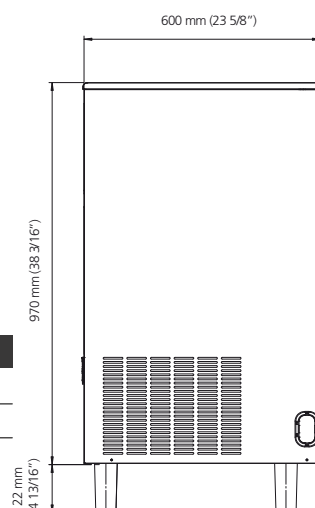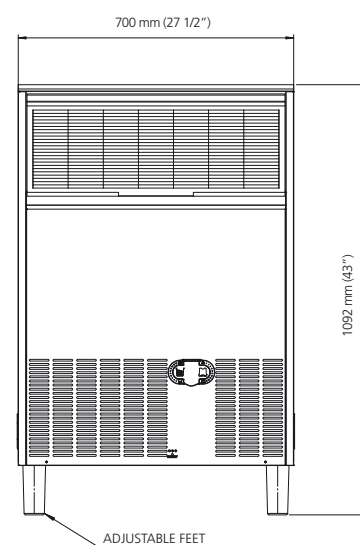

OPERATING LIMITS

Air Temp. Range	10°C - 43°C
Water Temp. Range	5°C - 38°C
Water Pressure	Min. 0.8 bar Max. 5 bar
Electrical Voltage	230V/50Hz/1ph (230V/60Hz/1ph on selected models)

All specifications and performance data are subject to normal manufacturing variances.

All panels are in stainless steel.



ORDERING AND SPECIFICATION INFORMATION

Model No.	Cond. unit	ICE Production per 24 hrs. at 10°C Air/10°C Water kg	Bin storage kg	Voltage Characteristics	Refrigerant	Water Consumption l/h*	Electric Consumption kWh/24h**	Net Weight kg	Max. Shipping Weight kg
B 9550 AS	Air	93	50	230/50/1	R134a	9	18	58	67
B 9550 WS	Water	96	50	230/50/1	R134a	52	16	58	67

*measured at 21°C water

**measured at 32°C air / 21°C water

BH 9550



90 kg Self-contained Ice Machine

Complete Range: BH 2006 - BH 2508 - BH 3008 - BH 3015 - BH 4015 - BH 5022 - BH 6022 - BH 7540 - BH 9050

Technical features

- Stainless steel bodywork - scotch brite
- Vertical pump
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- Refrigerant R290




Internal bin capacity



49 kg of Ice

2450 cubes

Type of ice

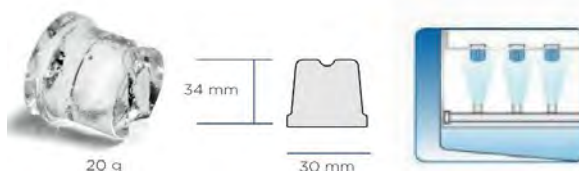

Machine dimensions

Voltage

230/50/1 Standard version

220-240/60/1 Available on demand

Net size WxDxH	700 x 600 x 970 mm
Net weight	58 kg
Shipping size WxDxH	770 x 680 x 1050 mm
	75 kg

Technology and Certifications




BH 9550



90 kg Self-contained Ice Machine

Complete Range: BH 2006 - BH 2508 - BH 3008 - BH 3015 - BH 4015 - BH 5022 - BH 6022 - BH 7540 - BH 9050

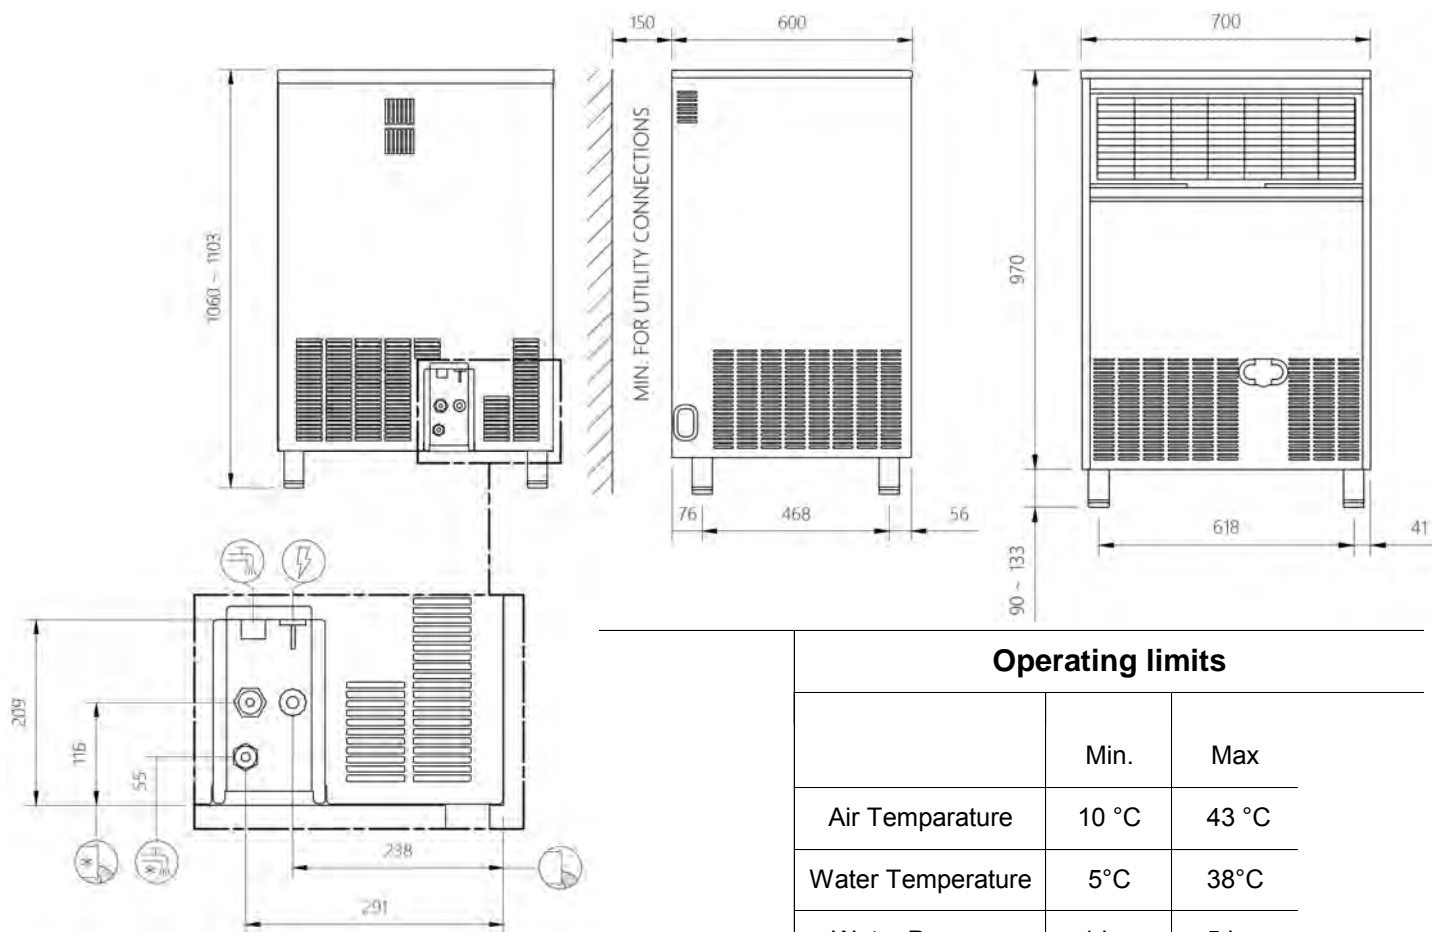

Operating limits

	Min.	Max
Air Temperature	10 °C	43 °C
Water Temperature	5°C	38°C
Water Pressure	1 bar	5 bar
Voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production Kg		Power Input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C	21°C/10°C		Type	Charge Kg		kWh/100kg	kWh/ 24h	Water l/h
BH 9550 A	230/50/1	90	87	770	R290	0,12	10	20,7	14,7	8,5
BH 9550 W	230/50/1	70	66	630	R290	0,1	10	23,1	13,6	36,9

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water



По вопросам продаж и поддержки обращайтесь:				
Алматы (727)345-47-04 Ангарск (3955)60-70-56 Архангельск (8182)63-90-72 Астрахань (8512)99-46-04 Барнаул (3852)73-04-60 Белгород (4722)40-23-64 Благовещенск (4162)22-76-07 Брянск (4832)59-03-52 Владивосток (423)249-28-31 Владикавказ (8672)28-90-48 Владимир (4922)49-43-18 Волгоград (844)278-03-48 Вологда (8172)26-41-59 Воронеж (473)204-51-73 Екатеринбург (343)384-55-89	Иваново (4932)77-34-06 Ижевск (3412)26-03-58 Иркутск (395)279-98-46 Казань (843)206-01-48 Калининград (4012)72-03-81 Калуга (4842)92-23-67 Кемерово (3842)65-04-62 Киров (8332)68-02-04 Коломна (4966)23-41-49 Кострома (4942)77-07-48 Краснодар (861)203-40-90 Красноярск (391)204-63-61 Курск (4712)77-13-04 Курган (3522)50-90-47 Липецк (4742)52-20-81	Магнитогорск (3519)55-03-13 Москва (495)268-04-70 Мурманск (8152)59-64-93 Набережные Челны (8552)20-53-41 Нижний Новгород (831)429-08-12 Новокузнецк (3843)20-46-81 Ноябрьск (3496)41-32-12 Новосибирск (383)227-86-73 Омск (3812)21-46-40 Орел (4862)44-53-42 Оренбург (3532)37-68-04 Пенза (8412)22-31-16 Петрозаводск (8142)55-98-37 Псков (8112)59-10-37 Пермь (342)205-81-47	Ростов-на-Дону (863)308-18-15 Рязань (4912)46-61-64 Самара (846)206-03-16 Санкт-Петербург (812)309-46-40 Саратов (845)249-38-78 Севастополь (8692)22-31-93 Саранск (8342)22-96-24 Симферополь (3652)67-13-56 Смоленск (4812)29-41-54 Сочи (862)225-72-31 Ставрополь (8652)20-65-13 Сургут (3462)77-98-35 Сыктывкар (8212)25-95-17 Тамбов (4752)50-40-97 Тверь (4822)63-31-35	Тольятти (8482)63-91-07 Томск (3822)98-41-53 Тула (4872)33-79-87 Тюмень (3452)66-21-18 Ульяновск (8422)24-23-59 Улан-Удэ (3012)59-97-51 Уфа (347)229-48-12 Хабаровск (4212)92-98-04 Чебоксары (8352)28-53-07 Челябинск (351)202-03-61 Череповец (8202)49-02-64 Чита (3022)38-34-83 Якутск (4112)23-90-97 Ярославль (4852)69-52-93
Россия +7(495)268-04-70	Казахстан +7(727)345-47-04	Беларусь +(375)257-127-884	Узбекистан +998(71)205-18-59	Киргизия +996(312)96-26-47

эл.почта: hib@nt-rt.ru || сайт: <https://hibu.nt-rt.ru/>